

**OUTDOOR
CATALOG
2020**

IMPORTED AND MARKETED BY/CUSTOMER CARE ADDRESS
LED Lum Lighting Solutions LLP

#77, 14th Street, South Phase, Industrial Estate, Ambattur,
Chennai - 600 058, Tamil Nadu, INDIA

Landline : +91 44 4852 8068, 4852 8069,

Mobile : +91 97907 99997, Customer Care : +91 96631 02951,

Email : ledlumlighting@gmail.com, Web : www.ledlum.in

www.ledlum.in






100-240V
50-60Hz





LLO-002

Watt: 1x3w
Dimension(mm): 95x68x32
LED chip: CREE
Material: Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 64°
Luminous Flux: 92lm
IP: IP54



LLO-003

Watt: 2x1w
Dimension(mm): 95x100x32
LED chip: CREE
Material: Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 73°
Luminous Flux: 86lm
IP: IP54

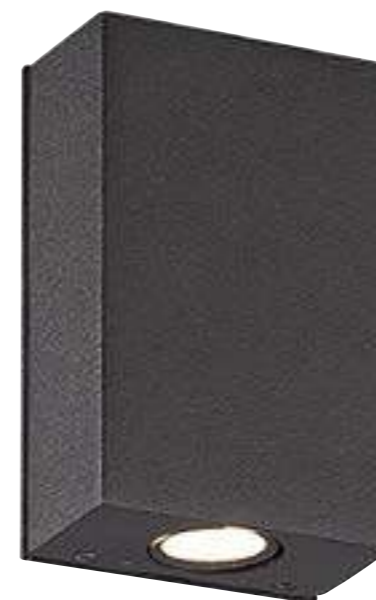


LLO-001

Watt: 2x1w
Dimension(mm): 105x65x36
LED chip: CREE
Material: Aluminium+glass
Body color: Black
CCT: 3000K/6000K
CRI: T
Beam Angle: 53°
Luminous Flux: 220lm/240lm
IP: IP54



LLO-020


Watt: 1x3w
Dimension(mm): 100x88x30
LED chip: CREE
Material: Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 66°
Luminous Flux: 111lm
IP: IP54






ONE WAY
LLO-005



Watt: 1x3w
Dimension(mm): 80x50x78
LED chip: CREE
Material: Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 81°
Luminous Flux: 121lm
IP: IP54




UP/DOWN
LLO-006

Watt: 2x3w
Dimension(mm): 150x50x78
LED chip: CREE
Material: Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 85°
Luminous Flux: 162lm
IP: IP54



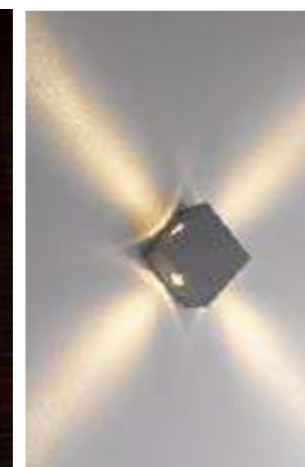

200-240V
50Hz





LLO-011

Watt: 2x1w
Dimension(mm): 74x74x52
LED chip: CREE
Material: Die-cast aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 35°
Luminous Flux: 179lm
IP: IP54





LLO-012

Watt: 1x1w
Dimension(mm): 74x74x52
LED chip: CREE
Material: Die-cast aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 35° x2
Luminous Flux: 81lm
IP: IP54

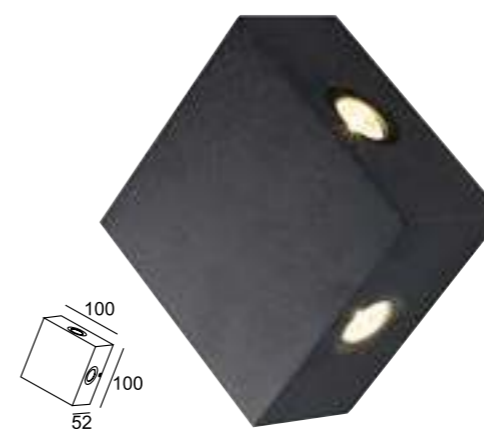

LLO-013

Watt: 4x1w
Dimension(mm): 100x100x52
LED chip: CREE
Material: Die-cast aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 11° x4
Luminous Flux: 179lm
IP: IP54

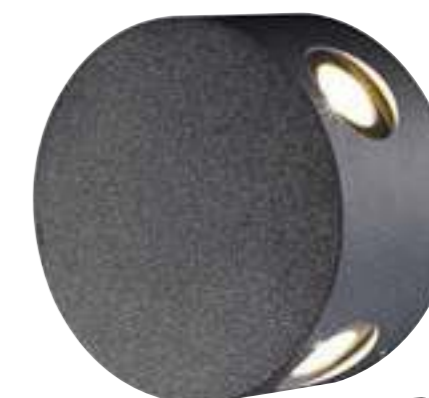


LLO-035

Watt: 4x1w
Dimension(mm): Ø100x52
LED chip: CREE
Material: Die-cast aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 11° x4
Luminous Flux: 179lm
IP: IP54




200-240V
50Hz




LLO-007

ONE WAY
Watt: 1x12w
Dimension(mm): 138x132x100
LED chip: CREE
Material: Aluminium+glass
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 44°
Luminous Flux: 846lm
IP: IP54




LLO-007A

UP/DOWN
Watt: 2x12w
Dimension(mm): 220x132x100
LED chip: CREE
Material: Aluminium+glass
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 44°
Luminous Flux: 1577lm
IP: IP54




LLO-008

ONE WAY
Watt: 1x7w
Dimension(mm): 116.5x120x121
LED chip: CREE
Material: Aluminium+glass
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 31°
Luminous Flux: 512lm
IP: IP54



LLO-009

UP/DOWN
Watt: 2x6w
Dimension(mm): 121x120x116.5
LED chip: CREE
Material: Aluminium+glass
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 31°
Luminous Flux: 935lm
IP: IP54



LLO-099D

UP/DOWN
Watt: 2x6w
Dimension(mm): 240x106x94
LED chip: CREE
Material: Aluminium+glass
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 73°
Luminous Flux: 725lm
IP: IP54



100-240V
50-60Hz



100-240V
50-60Hz



LLO-099B




Watt: 1x12w
Dimension(mm): 133x182x90
LED chip: CREE
Material: Aluminium+glass
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 44°
Luminous Flux: 846lm
IP: IP54



LLO-099C



Watt: 2x12w
Dimension(mm): 133x220x90
LED chip: CREE
Material: Aluminium+glass
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 44°
Luminous Flux: 1577lm
IP: IP54




LLO-099E



Watt: 2x6w
Dimension(mm): 240x108x120
LED chip: CREE
Material: Aluminium+glass
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 73°
Luminous Flux: 725lm
IP: IP54




Spare reflector, fixed or unfixed reflector can have different light effect




LLO-015
UP/DOWN
Watt: 2x4w
Dimension(mm): 90x90x110
LED chip: CREE
Material: Die-cast aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 22° /90°
Luminous Flux: 404lm
IP: IP54
NARROW/WIDE BEAM


200-240V
50Hz

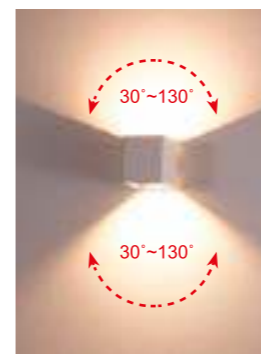

LLO-016
UP/DOWN
Watt: 2x7w
Dimension(mm): 130x90x120
LED chip: CREE
Material: Die-cast aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 21°
Luminous Flux: 1208lm
IP: IP54




LLO-017
ONE WAY
Watt: 1x7w
Dimension(mm): 92x90x120
LED chip: CREE
Material: Die-cast aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 21°
Luminous Flux: 541lm
IP: IP54



LLO-089
UP/DOWN
Watt: 2x5w
Dimension(mm): 119x110x105
LED chip: CREE
Material: Die-cast aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 30° -130°
Luminous Flux: 883lm
IP: IP54



200-240V
50Hz

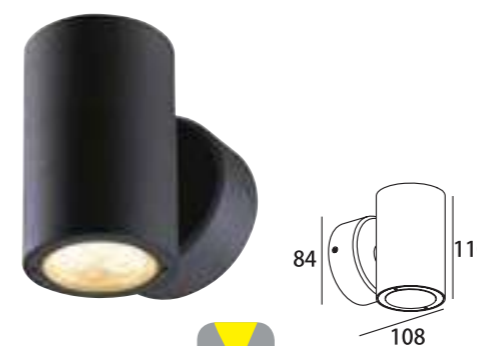


LLO-034
 Watt: 6x1w
 Dimension(mm): 110x108x84
 LED chip: CREE
 Material: Die-cast aluminium
 Body color: Black
 CCT: 3000K
 CRI: T
 Beam Angle: 25°
 Luminous Flux: 368lm
 IP: IP54



LLO-033
 Watt: 3x1w
 Dimension(mm): 85x106x84
 LED chip: CREE
 Material: Die-cast aluminium
 Body color: Black
 CCT: 3000K
 CRI: T
 Beam Angle: 24°
 Luminous Flux: 211lm
 IP: IP54




LLO-031
 Watt: 2x7w
 Dimension(mm): 135x135x96
 LED chip: CREE
 Material: Die-cast aluminium
 Body color: Grey/Black
 CCT: 3000K
 CRI: T
 Beam Angle: 18°
 Luminous Flux: 1153lm
 IP: IP54




LLO-032
 Watt: 1x7w
 Dimension(mm): 100x135x96
 LED chip: CREE
 Material: Die-cast aluminium
 Body color: Grey/Black
 CCT: 3000K
 CRI: T
 Beam Angle: 18°
 Luminous Flux: 540lm
 IP: IP54



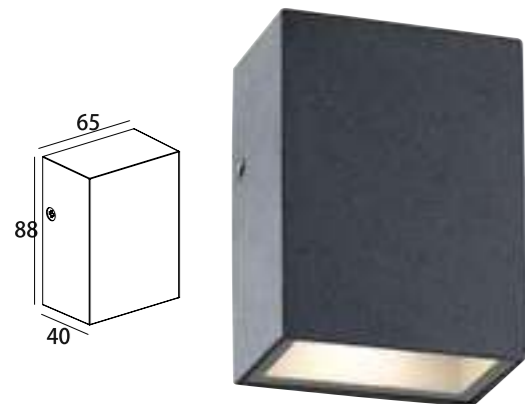


LLO-084

Watt: 1x3w
Dimension(mm): 88x65x40
LED chip: CREE
Material: Die-cast aluminium
Body color: Grey/Black
CCT: 3000K
CRI: T
Beam Angle: 101°
Luminous Flux: 85lm
IP: IP54

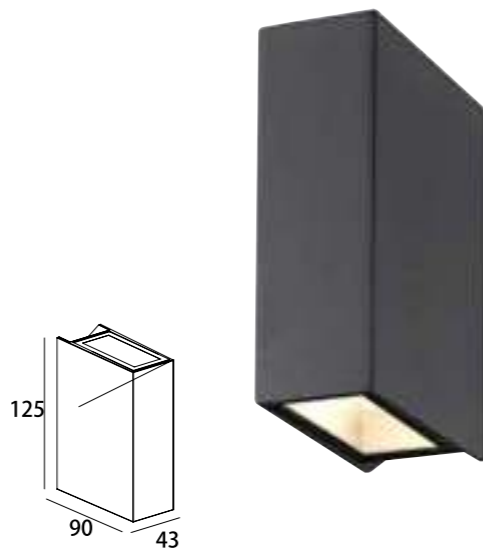


LLO-085

Watt: 2x4w
Dimension(mm): 125x90x43
LED chip: CREE
Material: Die-cast aluminium
Body color: Grey/Black
CCT: 3000K
CRI: T
Beam Angle: 50°
Luminous Flux: 320lm
IP: IP54

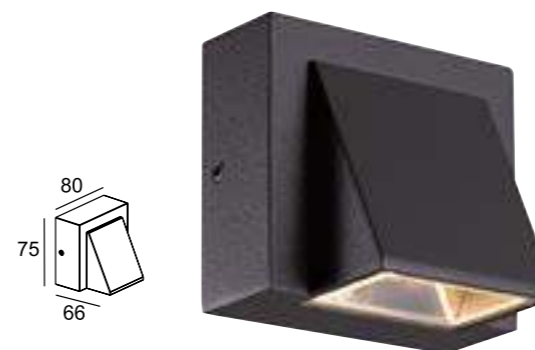

LLO-086

Watt: 1x3w
Dimension(mm): 80x75x66
LED chip: CREE
Material: Die-cast aluminium
Body color: Grey/Black
CCT: 3000K
CRI: T
Beam Angle: 84°
Luminous Flux: 85lm
IP: IP54




LLO-087

Watt: 2x3w
Dimension(mm): 80x141x66
LED chip: CREE
Material: Die-cast aluminium
Body color: Grey/Black
CCT: 3000K
CRI: T
Beam Angle: 87°
Luminous Flux: 160lm
IP: IP54

200-240V
50Hz
CREE





200-240V
50Hz
CREE




LLO-091
 ONE WAY
 Watt: 1x7w
 Dimension(mm): 95x82x62
 LED chip: CREE
 Material: Die-cast aluminium
 Body color: Grey/Black
 CCT: 3000K
 CRI: T
 Beam Angle: 72°
 Luminous Flux: 577lm
 IP: IP54




LLO-090
 UP/DOWN
 Watt: 2x7w
 Dimension(mm): 145x82x62
 LED chip: CREE
 Material: Die-cast aluminium
 Body color: Grey/Black
 CCT: 3000K
 CRI: T
 Beam Angle: 72°
 Luminous Flux: 1116lm
 IP: IP54




LLO-096
 ONE WAY
 Watt: 1x7w
 Dimension(mm): 125x125x63
 LED chip: CREE
 Material: Die-cast aluminium
 Body color: Grey/Black
 CCT: 3000K
 CRI: T
 Beam Angle: 108°
 Luminous Flux: 389lm
 IP: IP54



LLO-092
 UP/DOWN
 Watt: 2x4w
 Dimension(mm): 108x68x90
 LED chip: CREE
 Material: Die-cast aluminium
 Body color: Grey/Black
 CCT: 3000K
 CRI: T
 Beam Angle: 44°
 Luminous Flux: 565lm
 IP: IP54



LLO-093
 ONE WAY
 Watt: 1x4w
 Dimension(mm): 70x68x90
 LED chip: CREE
 Material: Die-cast aluminium
 Body color: Grey/Black
 CCT: 3000K
 CRI: T
 Beam Angle: 38°
 Luminous Flux: 273lm
 IP: IP54



LLO-098
 UP/DOWN
 Watt: 2x3w
 Dimension(mm): 109x173x63
 LED chip: CREE
 Material: Die-cast aluminium
 Body color: Grey/Black
 CCT: 3000K
 CRI: T
 Beam Angle: 15° / 78°
 Luminous Flux: 160lm
 IP: IP54



LLO-094A



Watt: 8w
 Dimension(mm): 140x35
 LED chip: EPISTAR SMD2835
 Material: Aluminium
 Body color: White/Black
 CCT: 3000K
 CRI: T
 Beam Angle: 360°
 Luminous Flux: 560lm
 IP: IP54



LLO-095A

Watt: 12w
 Dimension(mm): 180x35
 LED chip: EPISTAR SMD2835
 Material: Aluminium
 Body color: White/Black
 CCT: 3000K
 CRI: T
 Beam Angle: 360°
 Luminous Flux: 840lm
 IP: IP54



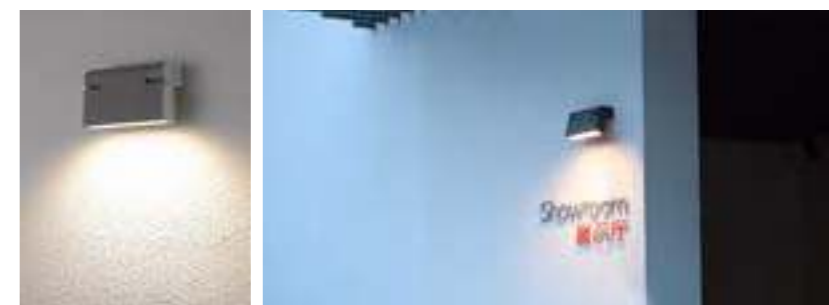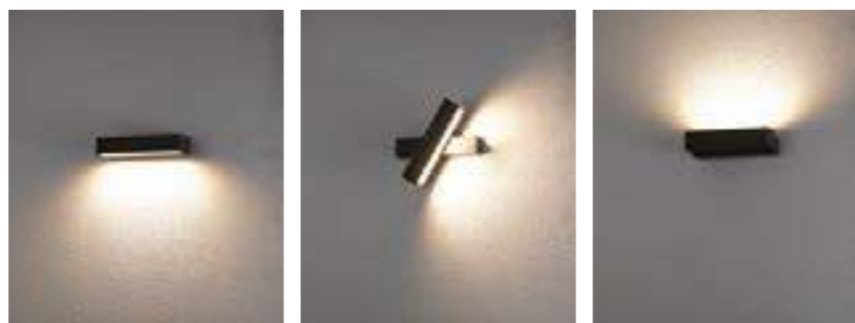

LLO-099G

Watt: 6x1w
 Dimension(mm): 231x77x48
 LED chip: CREE
 Material: Aluminium+glass
 Body color: Black
 CCT: 3000K
 CRI: T
 Beam Angle: 28°
 Luminous Flux: 724lm
 IP: IP54




LLO-099F

Watt: 5x2w
 Dimension(mm): 185x156x45
 LED chip: CREE
 Material: Aluminium+glass
 Body color: Black
 CCT: 3000K
 CRI: T
 Beam Angle: 26°
 Luminous Flux: 724lm
 IP: IP54


CE **RoHS** COMPLIANT **REACH**

100-240V
50-60Hz **CREE**

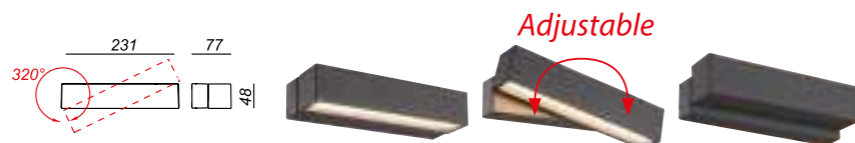


CREE

100-240V
50-60Hz




LLO-099K

Watt: 2x6w
Dimension(mm): Ø90x220
LED chip: EPISTAR
Material: Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 15°
Luminous Flux: 480lm
IP: IP54




LLO-099J

Watt: 6w
Dimension(mm): Ø90x160
LED chip: EPISTAR
Material: Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 15°
Luminous Flux: 240lm
IP: IP54




LLO-099M

Watt: 2x12w
Dimension(mm): Ø108x220
LED chip: EPISTAR
Material: Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 15°
Luminous Flux: 720lm
IP: IP54




LLO-099L

Watt: 12w
Dimension(mm): Ø108x160
LED chip: EPISTAR
Material: Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 15°
Luminous Flux: 480lm
IP: IP54



LLO-0990

Watt: 13W
Dimension(mm): 120*61*240
LED chip: OSRAM
Material: ALUMINIUM
Body color: DARK GREY
CCT: 3000K
CRI: >80
Beam Angle: 120°
Luminous Flux: 610LM
IP: 65




LLO-099N

Watt: 7W
Dimension(mm): 120*61*157
LED chip: OSRAM
Material: ALUMINIUM
Body color: DARK GREY
CCT: 3000K
CRI: >80
Beam Angle: 60°
Luminous Flux: 305LM
IP: 65




LLO-099P

Watt: 13W
Dimension(mm): 172*52*141
LED chip: OSRAM
Material: ALUMINIUM
Body color: DARK GREY
CCT: 3000K
CRI: >80
Beam Angle: 127°
Luminous Flux: 652LM
IP: 65




LLO-099R


Watt: 11W
Dimension(mm): 210*46*210
LED chip: OSRAM
Material: ALUMINIUM
Body color: DARK GREY
CCT: 3000K
CRI: >80
Beam Angle: 202°
Luminous Flux: 322LM
IP: 65



LLO-099Q


Watt: 12W
Dimension(mm): 215*128*183
LED chip: CREE
Material: ALUMINIUM+PC
Body color: DARK GREY
CCT: 3000K
CRI: >80
Beam Angle: 120°
Luminous Flux: 720LM
IP: IP65



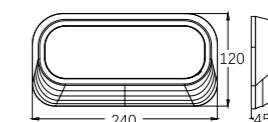


LLO-102

Watt: 10w
Dimension(mm): 240x120x45.5
LED chip: EPISTAR
Material: Die-cast aluminium
Body color: Black/Grey
CCT: 3000K
CRI: T
Luminous Flux: 450lm
IP: IP65



LLO-103

Watt: 10w
Dimension(mm): 230x72x56
LED chip: EPISTAR
Material: Die-cast aluminium
Body color: Black/Grey
CCT: 3000K
CRI: T
Luminous Flux: 275lm
IP: IP65

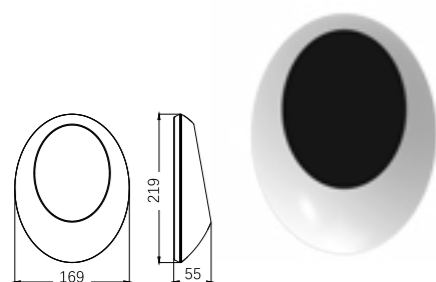

LLO-028

Watt: 12w
Dimension(mm): 219x55x169
LED chip: EPISTAR
Material: Die-cast aluminium
Body color: Black/Grey
CCT: 3000K
CRI: T
Luminous Flux: 621lm
IP: IP54



LLO-099H



Watt: 11w
Dimension(mm): 200x55
LED chip: EVERLIGHT AC LED
Material: Aluminium+pc
Body color: Black/Grey
CCT: 3000K
CRI: T
Beam Angle: 114°
Luminous Flux: 872lm
IP: IP54






LLO-060

Watt: 4w
Dimension(mm): 139x117x116
LED chip: EVERLIGHT
Material: Aluminium+pc
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 114°
Luminous Flux: 151lm
IP: IP54

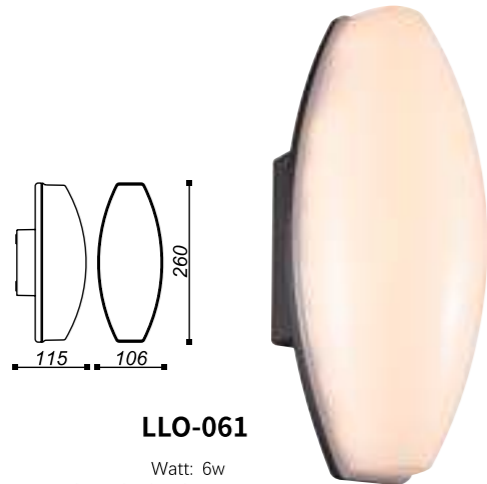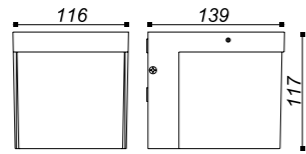


LLO-061

Watt: 6w
Dimension(mm): 260x106x115
LED chip: EVERLIGHT
Material: Aluminium+pc
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 144°
Luminous Flux: 595lm
IP: IP54

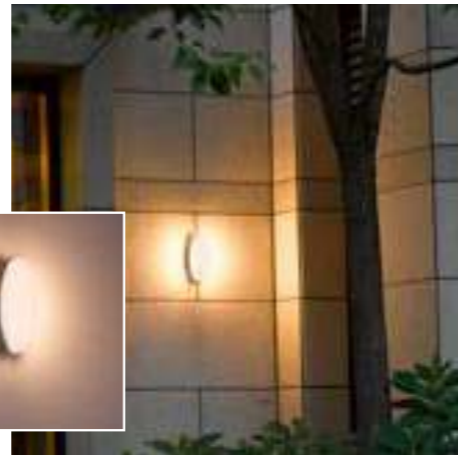

LLO-063

Watt: 6w
Dimension(mm): 180x55
LED chip: EVERLIGHT
Material: Aluminium+pc
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 129°
Luminous Flux: 412lm
IP: IP54





LLO-062

Watt: 6w
Dimension(mm): 200x160x45
LED chip: EVERLIGHT
Material: Aluminium+pc
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 121°
Luminous Flux: 629lm
IP: IP54



LLO-071


Watt: 2w
Dimension(mm): 80.5x68x93
LED chip: EVERLIGHT
Material: Aluminium+pc
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 128°
Luminous Flux: 123lm
IP: IP54

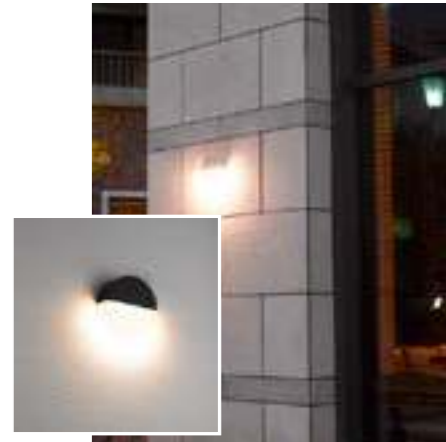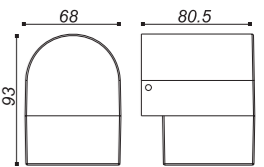





LLO-079

Watt: 10w
Dimension(mm): 185x122x170
LED chip: EPISTAR
Material: Die-cast aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 110°
Luminous Flux: 465lm
IP: IP54

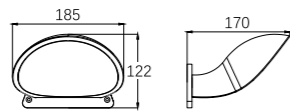


LLO-078

Watt: 7w
Dimension(mm): 210x60x43
LED chip: OSRAM
Material: Die-cast aluminium
Body color: Grey
CCT: 3000K
CRI: T
Beam Angle: 114°
Luminous Flux: 310lm
IP: IP54



LLO-074

Watt: 6w
Dimension(mm): 161x100x98
LED chip: EPISTAR
Material: Die-cast aluminium
Body color: Grey
CCT: 3000K
CRI: T
Beam Angle: 110°
Luminous Flux: 388lm
IP: IP54

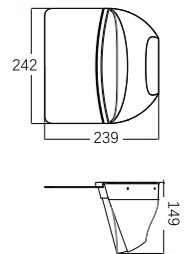


LLO-073

Watt: 12w
Dimension(mm): 242x239x149
LED chip: EPISTAR
Material: Die-cast aluminium
Body color: Grey
CCT: 3000K
CRI: T
Beam Angle: 110°
Luminous Flux: 754lm
IP: IP54




LLO-079N

Watt: 10W
Dimension(mm): 180*88*130
LED chip: EPISTAR
Material: ALUMINIUM+PC
Body color: DARK GREY
CCT: 3000K
CRI: >80
Beam Angle: 120°
Luminous Flux: 600LM
IP: IP54




LLO-079E

Watt: 2W
Dimension(mm): 120x37
LED chip: SMD-EVERLIGHT
Material: ALUMINIUM+PC
Body color: DARK GREY
CCT: 3000K
CRI: >80
Beam Angle: 72°
Luminous Flux: 117LM
IP: IP65




LLO-079F

Watt: 3W
Dimension(mm): 120x37
LED chip: SMD-EVERLIGHT
Material: ALUMINIUM+PC
Body color: DARK GREY
CCT: 3000K
CRI: >80
Beam Angle: 72°
Luminous Flux: 176LM
IP: IP65




LLO-079B


Watt: 12w
Dimension(mm): 266x106x76
LED chip: OSRAM
Material: Die-cast aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 121°
Luminous Flux: 1202lm
IP: IP54




LLO-079A

Watt: 10w
Dimension(mm): 222x118x65.5
LED chip: EPISTAR
Material: Die-cast aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 127°
Luminous Flux: 1081lm
IP: IP54







LLO-079I
Watt: 16W
Dimension(mm): 183*130*183
LED chip: EPISTAR
Material: ALUMINIUM+PC
Body color: DARK GREY
CCT: 3000K
CRI: >80
Beam Angle: 120°
Luminous Flux: 960LM
IP: IP65




LLO-079J
Watt: 16W
Dimension(mm): 230*55*230
LED chip: EPISTAR
Material: ALUMINIUM+PC
Body color: DARK GREY
CCT: 3000K
CRI: >80
Beam Angle: 120°
Luminous Flux: 960LM
IP: IP65




LLO-079K
Watt: 9W
Dimension(mm): 150*105*150
LED chip: EPISTAR
Material: ALUMINIUM+PC
Body color: DARK GREY
CCT: 3000K
CRI: >80
Beam Angle: 120°
Luminous Flux: 540LM
IP: IP54




LLO-079L
Watt: 18W
Dimension(mm): 200*105*200
LED chip: EPISTAR
Material: ALUMINIUM+PC
Body color: DARK GREY
CCT: 3000K
CRI: >80
Beam Angle: 120°
Luminous Flux: 1080LM
IP: IP54




LLO-079G
Watt: 3W
Dimension(mm): 112*112*35
LED chip: SMD-EVERLIGHT
Material: ALUMINIUM+PC
Body color: DARK GREY
CCT: 3000K
CRI: >80
Beam Angle: 77°
Luminous Flux: 216LM
IP: IP65




LLO-079H
Watt: 10W
Dimension(mm): 201*69*286
LED chip: SMD-EVERLIGHT
Material: ALUMINIUM+GLASS
Body color: DARK GREY
CCT: 3000K
CRI: >80
Beam Angle: 113°
Luminous Flux: 662LM
IP: IP54



LLO-079M
Watt: 18W
Dimension(mm): 150*105*280
LED chip: EPISTAR
Material: ALUMINIUM+PC
Body color: DARK GREY
CCT: 3000K
CRI: >80
Beam Angle: 120°
Luminous Flux: 1080LM
IP: IP54




LLO-094
 Watt: 15w
 Dimension(mm): 258x72x41
 LED chip: Philips-AC LED
 Material: Die-cast aluminium
 Body color: Black
 CCT: 3000K
 CRI: T
 Beam Angle: 74°
 Luminous Flux: 360lm
 IP: IP65




LLO-107
 Watt: 36w
 Dimension(mm): 500x60x60
 LED chip: Philips-AC LED
 Material: Die-cast aluminium
 Body color: Black
 CCT: 3000K
 CRI: T
 Beam Angle: 107°
 Luminous Flux: 2156lm
 IP: IP65


LLO-108
 Watt: 18w
 Dimension(mm): 500x60x60
 LED chip: Philips-AC LED
 Material: Die-cast aluminium
 Body color: Black
 CCT: 3000K
 CRI: T
 Beam Angle: 107°
 Luminous Flux: 1035lm
 IP: IP65





LLO-095
 Watt: 7w
 Dimension(mm): 180x45x30
 LED chip: Philips-AC LED
 Material: Die-cast aluminium
 Body color: Black
 CCT: 3000K
 CRI: T
 Beam Angle: 90°
 Luminous Flux: 233lm
 IP: IP65



LLO-109
 Watt: 18w
 Dimension(mm): 250x60x60
 LED chip: Philips-AC LED
 Material: Die-cast aluminium
 Body color: Black
 CCT: 3000K
 CRI: T
 Beam Angle: 110°
 Luminous Flux: 1035lm
 IP: IP65




LLO-110
 Watt: 9w
 Dimension(mm): 250x60x60
 LED chip: Philips-AC LED
 Material: Die-cast aluminium
 Body color: Black
 CCT: 3000K
 CRI: T
 Beam Angle: 110°
 Luminous Flux: 524lm
 IP: IP65



LLO-100

Watt: 2w
Dimension(mm): 90x38x60
LED chip: EVERLIGHT
Material: Aluminium+pc
Body color: Black
CCT: 3000K/6000K
CRI: T
Beam Angle: 98°
Luminous Flux: 130lm/140lm
IP: IP54

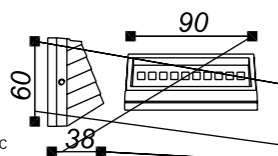


10xLED



LLO-101

Watt: 3.6w
Dimension(mm): 150x38x70
LED chip: EVERLIGHT
Material: Aluminium+pc
Body color: Black
CCT: 3000K/6000K
CRI: T
Beam Angle: 98°
Luminous Flux: 234lm/252lm
IP: IP54

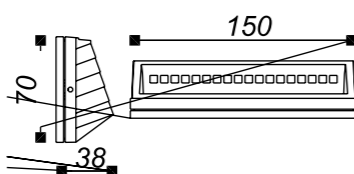

18xLED



LLO-104

Watt: 1x7w
Dimension(mm): 82x82x58
LED chip: Philips-AC LED
Material: Die-cast aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 93°
Luminous Flux: 218lm
IP: IP54




LLO-105

Watt: 1x7w
Dimension(mm): 122x82x59
LED chip: Philips-AC LED
Material: Die-cast aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 118°
Luminous Flux: 261lm
IP: IP54

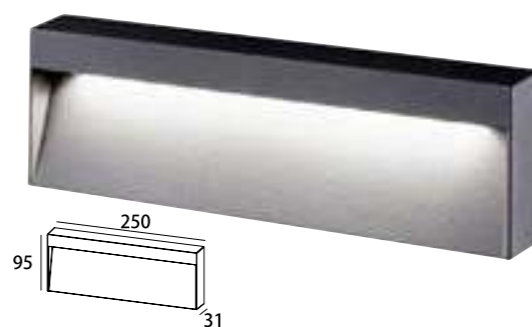



LLO-153

Watt: 9w
 Dimension(mm): 250x95x31
 LED chip: PHILIPS-AC LED
 Material: Die-cast aluminium
 Body color: Black
 CCT: 3000K
 CRI: T
 Beam Angle: 47°
 Luminous Flux: 487lm
 IP: IP65



LLO-152

Watt: 4w
 Dimension(mm): 95x95x31
 LED chip: PHILIPS-AC LED
 Material: Die-cast aluminium
 Body color: Black
 CCT: 3000K
 CRI: T
 Beam Angle: 52°
 Luminous Flux: 185lm
 IP: IP65

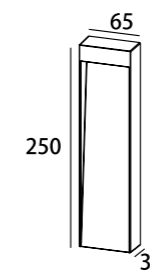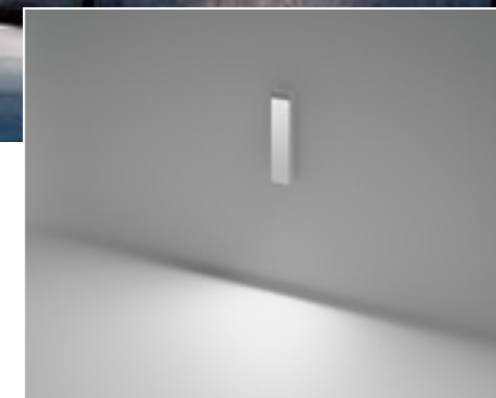

LLO-154


Watt: 8w
 Dimension(mm): 250x65x31
 LED chip: PHILIPS-AC LED
 Material: Die-cast aluminium
 Body color: Black
 CCT: 3000K
 CRI: T
 Beam Angle: 53°
 Luminous Flux: 250lm
 IP: IP65






LLO-1590

Watt: 3W
 Dimension(mm): 155*37*75
 LED chip: EPISTAR
 Material: ALUMINIUM+PC
 Body color: DARK GREY
 CCT: 3000K
 CRI: >80
 Beam Angle: 120°
 Luminous Flux: 180LM
 IP: IP65




LLO-159M

Watt: 3W
 Dimension(mm): 105*22*105
 LED chip: EPISTAR
 Material: ALUMINIUM+PC
 Body color: DARK GREY
 CCT: 3000K
 CRI: >80
 Beam Angle: 120°
 Luminous Flux: 180LM
 IP: IP54




LLO-159N


Watt: 6W
 Dimension(mm): 160*30*160
 LED chip: EPISTAR
 Material: ALUMINIUM+PC
 Body color: DARK GREY
 CCT: 3000K
 CRI: >80
 Beam Angle: 120°
 Luminous Flux: 360LM
 IP: IP54



LLO-159P


Watt: 5W
 Dimension(mm): 240*37*75
 LED chip: EPISTAR
 Material: ALUMINIUM+PC
 Body color: DARK GREY
 CCT: 3000K
 CRI: >80
 Beam Angle: 120°
 Luminous Flux: 300LM
 IP: IP65



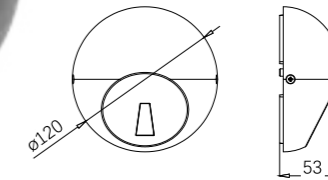


LLO-158

Watt: 3w
 Dimension(mm): 120x53
 LED chip: CREE
 Material: Die-cast Aluminium+pc
 Body color: Black
 CCT: 3000K
 CRI: T
 Beam Angle: 18°
 Luminous Flux: 32lm
 IP: IP54

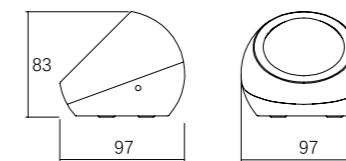


LLO-159

Watt: 6w
 Dimension(mm): 97x97x83
 LED chip: CREE
 Material: Die-cast Aluminium+pc
 Body color: Black
 CCT: 3000K
 CRI: T
 Beam Angle: 45°
 Luminous Flux: 360lm
 IP: IP65




LLO-040

Watt: 4w
 Dimension(mm): 140x65
 LED chip: EVERLIGHT
 Material: Aluminium+pc
 Body color: Black
 CCT: 3000K
 CRI: T
 Beam Angle: 126°
 Luminous Flux: 278lm
 IP: IP54





LLO-052

Watt: 9w
 Dimension(mm): 300x70x53
 LED chip: EVERLIGHT
 Material: Die-cast Aluminium+pc
 Body color: Black
 CCT: 3000K
 CRI: T
 Beam Angle: 127°
 Luminous Flux: 350lm
 IP: IP65



LLO-041

Watt: 4w
 Dimension(mm): 140x65
 LED chip: EVERLIGHT
 Material: Aluminium+pc
 Body color: Black
 CCT: 3000K
 CRI: T
 Beam Angle: 119°
 Luminous Flux: 278lm
 IP: IP54



LLO-044

Watt: 6w
 Dimension(mm): 250x250x60
 LED chip: OSRAM
 Material: Aluminium+pc
 Body color: Black
 CCT: 3000K
 CRI: T
 Beam Angle: 124°
 Luminous Flux: 630lm
 IP: IP65






LLO-055

Watt: 6w
Dimension(mm): 150x55
LED chip: EVERLIGHT
Material: Aluminium+pc
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 106°
Luminous Flux: 539lm
IP: IP54




LLO-057

Watt: 10w
Dimension(mm): 108x108x75
LED chip: Edison
Material: Die-cast Aluminium+pc
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 120°
Luminous Flux: 650lm
IP: IP54




LLO-056

Watt: 10w
Dimension(mm): 250x70
LED chip: EVERLIGHT
Material: Aluminium+pc
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 106°
Luminous Flux: 996lm
IP: IP54




LLO-058

Watt: 10w
Dimension(mm): 108x108x75
LED chip: Edison
Material: Die-cast Aluminium+pc
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 120°
Luminous Flux: 650lm
IP: IP54




LLO-059

Watt: 5w
Dimension(mm): 52x10
LED chip: DOB
Material: Aluminium
Body color: White/Black
CCT: 3000K/4000K
CRI: T
Beam Angle: 120°
Luminous Flux: 450-500lm
IP: IP54




LLO-059A

Watt: 10w
Dimension(mm): 100x10
LED chip: DOB
Material: Aluminium
Body color: White/Black
CCT: 3000K/4000K
CRI: T
Beam Angle: 120°
Luminous Flux: 900-1000lm
IP: IP54




LLO-059B

Watt: 5w
Dimension(mm): 52x10
LED chip: DOB
Material: Aluminium
Body color: White/Black
CCT: 3000K/4000K
CRI: T
Beam Angle: 120°
Luminous Flux: 450-500lm
IP: IP54



LLO-059C


Watt: 10w
Dimension(mm): 100x10
LED chip: DOB
Material: Aluminium
Body color: White/Black
CCT: 3000K/4000K
CRI: T
Beam Angle: 120°
Luminous Flux: 900-1000lm
IP: IP54






LLO-059E


Watt: 15W
Dimension(mm): 80x45
LED chip: Lumens/ DOB
Material: Aluminium
Body color: Sand black
CCT: 3000K
CRI: >80
Beam Angle: 35°
Luminous Flux: 1179LM
IP: IP54



LLO-059D


Watt: 8W
Dimension(mm): 65x45
LED chip: Lumens/DOB
Material: Aluminium
Body color: Sand black
CCT: 3000K
CRI: >80
Beam Angle: 35°
Luminous Flux: 577LM
IP: IP54






LLO-043

Watt: 18w
Dimension(mm): 140x145
LED chip: CREE
Material: Aluminium+glass
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 46°
Luminous Flux: 1429lm
IP: IP54




LLO-045

Watt: 1x7w
Dimension(mm): 95x90
LED chip: CREE
Material: Die-cast Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 17°
Luminous Flux: 581lm
IP: IP54




LLO-047


Watt: 15w
Dimension(mm): 205x130
LED chip: CREE
Material: Die-cast Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 55°
Luminous Flux: 854lm
IP: IP65



LLO-053


Watt: 1x12w
Dimension(mm): 90x137
LED chip: CREE
Material: Aluminium+glass
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 44°
Luminous Flux: 846lm
IP: IP54

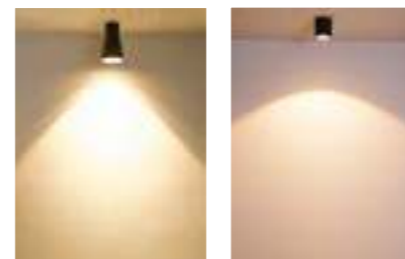




LLO-042

Watt: 12w
Dimension(mm): 140x100
LED chip: CREE
Material: Aluminium+glass
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 46°
Luminous Flux: 846lm
IP: IP54



LLO-046


Watt: 6w
Dimension(mm): 90x94
LED chip: CREE
Material: Die-cast Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 23°
Luminous Flux: 502lm
IP: IP54



20° Adjustable

LLO-048

Watt: 9w
Dimension(mm): 90x90x102
LED chip: CREE
Material: Die-cast Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 43°
Luminous Flux: 707lm
IP: IP54







LLO-054

Watt: 4x7w
Dimension(mm): 260x260x74
LED chip: CREE
Material: Die-cast Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 28°
Luminous Flux: 1859lm
IP: IP54

100-240V
50-60Hz



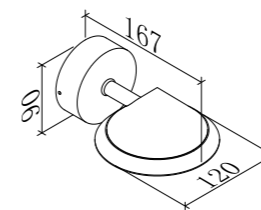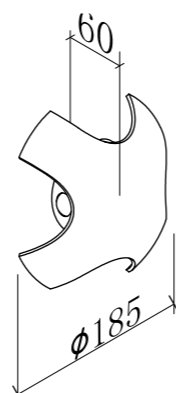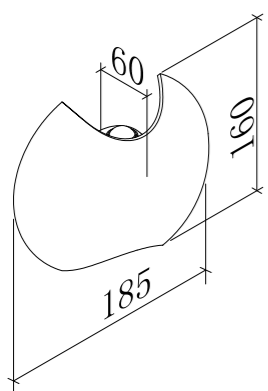

LLO-131
UP/DOWN
Watt: 2x3w
Dimension(mm): 185x160x60
LED chip: CREE
Material: Aluminium
Body color: White
CCT: 3000K
CRI: T
Beam Angle: 45°
Luminous Flux: 420lm
IP: IP65

LLO-132
THREE WAY
Watt: 3x3w
Dimension(mm): 185x180x60
LED chip: CREE
Material: Aluminium
Body color: White
CCT: 3000K
CRI: T
Beam Angle: 45°
Luminous Flux: 630lm
IP: IP65


LLO-133
FOUR WAY
Watt: 4x3w
Dimension(mm): 185x180x60
LED chip: CREE
Material: Aluminium
Body color: White
CCT: 3000K
CRI: T
Beam Angle: 45°
Luminous Flux: 840lm
IP: IP65

LLO-136
ONE WAY
Watt: 5w
Dimension(mm): 120x90x167
LED chip: EPISTAR COB
Material: Die-cast Aluminium+pc
Body color: White
CCT: 3000K
CRI: T
Beam Angle: 84°
Luminous Flux: 350lm
IP: IP65


LLO-135
UP/DOWN
Watt: 10w
Dimension(mm): 120x125x170
LED chip: EPISTAR COB
Material: Die-cast Aluminium+pc
Body color: White
CCT: 3000K
CRI: T
Beam Angle: 86°
Luminous Flux: 700lm
IP: IP65




LLWW-009




Watt: 3w
Dimension(mm): 150x90x42
LED chip: CREE
Material: Die-cast Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 120x5°
Luminous Flux: 180lm
IP: IP65

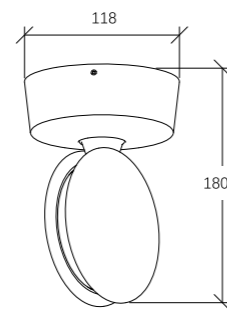

LLO-130
Watt: 9w
Dimension(mm): 180x118
LED chip: OSRAM
Material: Aluminium
Body color: White
CCT: 3000K
CRI: T
Beam Angle: 17°
Luminous Flux: 630lm
IP: IP65



LLO-137
Watt: 10w
Dimension(mm): 90x200x90
LED chip: EPISTAR COB
Material: Aluminium
Body color: White
CCT: 3000K
CRI: T
Beam Angle: 31°
Luminous Flux: 700lm
IP: IP65




LLO-138
Watt: 2x3w
Dimension(mm): 100x100x100
LED chip: Bridgelux
Material: Aluminium
Body color: White
CCT: 3000K
CRI: T
Beam Angle: 0° -120°
Luminous Flux: 480-500lm
IP: IP65

100-240V
50-60Hz




100-240V
50-60Hz



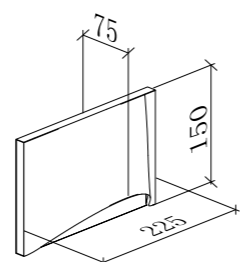


LLO-139A

Watt: 10w
 Dimension(mm): 225x75x150
 LED chip: EPISTAR SMD
 Material: Aluminium
 Body color: White
 CCT: 3000K
 CRI: T
 Beam Angle: 120°
 Luminous Flux: 800lm
 IP: IP65

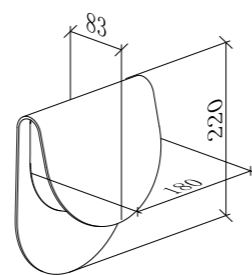


LLO-139B

Watt: 10w
 Dimension(mm): 220x180x83
 LED chip: EPISTAR SMD
 Material: Aluminium
 Body color: White
 CCT: 3000K
 CRI: T
 Beam Angle: 120°
 Luminous Flux: 800lm
 IP: IP65

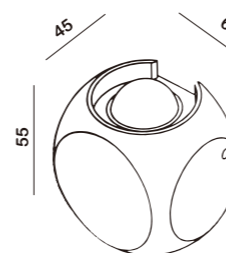

LLO-139C

Watt: 2w
 Dimension(mm): 55x45x60
 LED chip: CREE
 Material: Aluminium
 Body color: White/Dark grey
 CCT: 3000K
 CRI: T
 Beam Angle: 60°
 Luminous Flux: 180-200lm
 IP: IP65




LLO-139D

Watt: 4w
 Dimension(mm): 85x85x57
 LED chip: CREE XTE
 Material: Die-casting Aluminium+Pc
 Body color: White/Dark grey
 CCT: 3000K
 CRI: T
 Beam Angle: 30°
 Luminous Flux: 240lm
 IP: IP65




LLO-139E
 Watt: 1W
 Dimension(mm): 55x45x60
 LED chip: CREE
 Material: Aluminium
 Body color: White/Dark grey
 CCT: 3000K
 CRI: ≥ 80
 Beam Angle: 60°
 Luminous Flux: 70-80LM
 IP: IP54

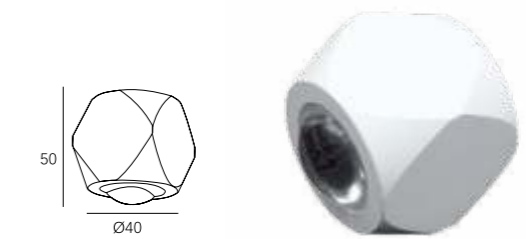

LLO-139G
 Watt: 2*1W
 Dimension(mm): 40*50*40
 LED chip: Bridgelux
 Material: ALUMINIUM+PC
 Body color: White/Black
 CCT: 3000K
 CRI: >80
 Beam Angle: 60°
 Luminous Flux: 190-200LM
 IP: IP54

LLO-139H
 Watt: 1W
 Dimension(mm): 40*50*40
 LED chip: Bridgelux
 Material: ALUMINIUM+PC
 Body color: White/Black
 CCT: 3000K
 CRI: >80
 Beam Angle: 60°
 Luminous Flux: 90-100LM
 IP: IP54

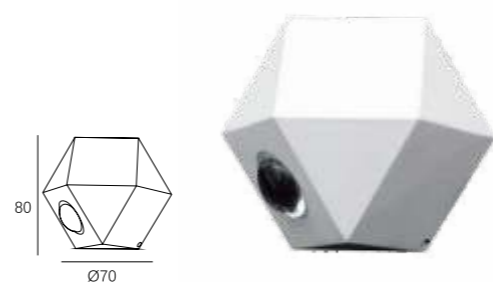


LLO-139I
 Watt: 2*2W
 Dimension(mm): 70*80*70
 LED chip: Bridgelux
 Material: ALUMINIUM+PC
 Body color: White/Black
 CCT: 3000K
 CRI: >80
 Beam Angle: 60°
 Luminous Flux: 300-350LM
 IP: IP54

LLO-139J
 Watt: 4*2W
 Dimension(mm): 70*80*70
 LED chip: Bridgelux
 Material: ALUMINIUM+PC
 Body color: White/Black
 CCT: 3000K
 CRI: >80
 Beam Angle: 60°
 Luminous Flux: 600-650LM
 IP: IP54



LLO-139F
 Watt: 2*3W
 Dimension(mm): 115x105x60
 LED chip: Bridgelux
 Material: ALUMINIUM+PC
 Body color: White/Black
 CCT: 3000K
 CRI: >80
 Beam Angle: 60°
 Luminous Flux: 540-600LM
 IP: IP54

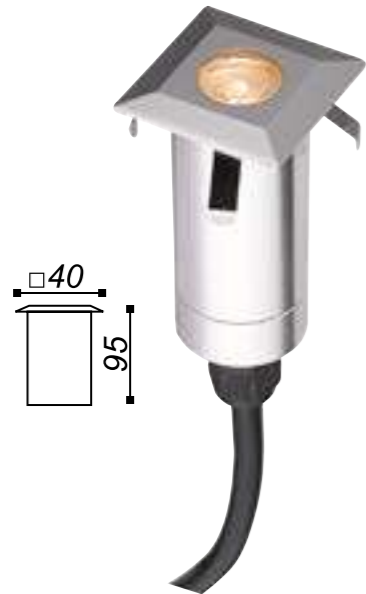

LLO-121

Watt: 1w
Dimension(mm): 40x40x95
Cut-Out(mm): 35x35
LED chip: CREE
Material: Aluminium
Body color: silver
CCT: 3000K
CRI: T
Beam Angle: 24°
Luminous Flux: 46lm
IP: IP65



LLO-120

Watt: 1w
Dimension(mm): 40x95
Cut-Out(mm): 35
LED chip: CREE
Material: Aluminium
Body color: silver
CCT: 3000K
CRI: T
Beam Angle: 24°
Luminous Flux: 46lm
IP: IP65




LLO-129

Watt: 1w
Dimension(mm): 117x67
Cut-Out(mm): 63x114
LED chip: CREE
Material: Aluminium+pc
Body color: silver
CCT: 3000K
CRI: T
Beam Angle: 28°
Luminous Flux: 89lm
IP: IP65




LLO-129A

Watt: 2w
Dimension(mm): 50x83
Cut-Out(mm): 38x65
LED chip: OSRAM
Material: Aluminium+pc
Body color: silver
CCT: 3000K
CRI: T
Beam Angle: 30°
Luminous Flux: 160lm
IP: IP65

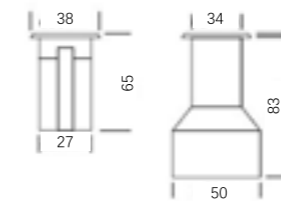


LLO-129C


Watt: 1w
Dimension(mm): 31x46
Cut-Out(mm): 29.5x55
LED chip: EPISTAR
Material: Aluminium
Body color: silver
CCT: 3000K
CRI: T
Beam Angle: 45°
Luminous Flux: 80lm
IP: IP65



LLO-129D

Watt: 3w
Dimension(mm): 42x80
Cut-Out(mm): 40
LED chip: Bridgelux
Material: Aluminium
Body color: silver
CCT: 3000K
CRI: T
Beam Angle: 10°
Luminous Flux: 180lm
IP: IP65






LLO-122


Watt: 3w
Dimension(mm): 105x120
Cut-Out(mm): 97
LED chip: CREE
Material: Aluminium
Body color: silver
CCT: 3000K
CRI: T
Beam Angle: 96°
Luminous Flux: 180lm
IP: IP65

CREE
200-240V
50-60Hz




LLO-123

Watt: 3w
Dimension(mm): 105x105x120
Cut-Out(mm): 97x97
LED chip: CREE
Material: Aluminium
Body color: silver
CCT: 3000K
CRI: T
Beam Angle: 96°
Luminous Flux: 180lm
IP: IP65



LLO-127

Watt: 7w
Dimension(mm): 105x125x103
Cut-Out(mm): 117x102
LED chip: CREE
Material: Aluminium
Body color: silver
CCT: 3000K
CRI: T
Beam Angle: 27°
Luminous Flux: 597lm
IP: IP65





LLO-128

Watt: 3w
Dimension(mm): 118x100
Cut-Out(mm): 90
LED chip: CREE
Material: Aluminium
Body color: silver
CCT: 3000K
CRI: T
Beam Angle: 26°
Luminous Flux: 208lm
IP: IP65




200-240V
50-60Hz
CREE

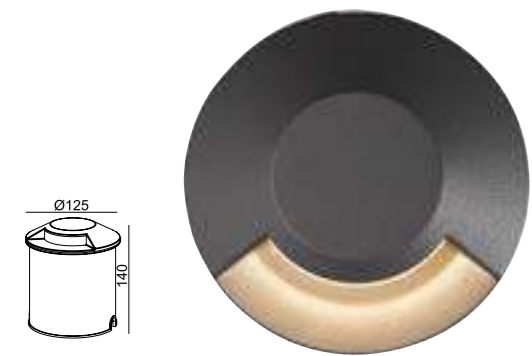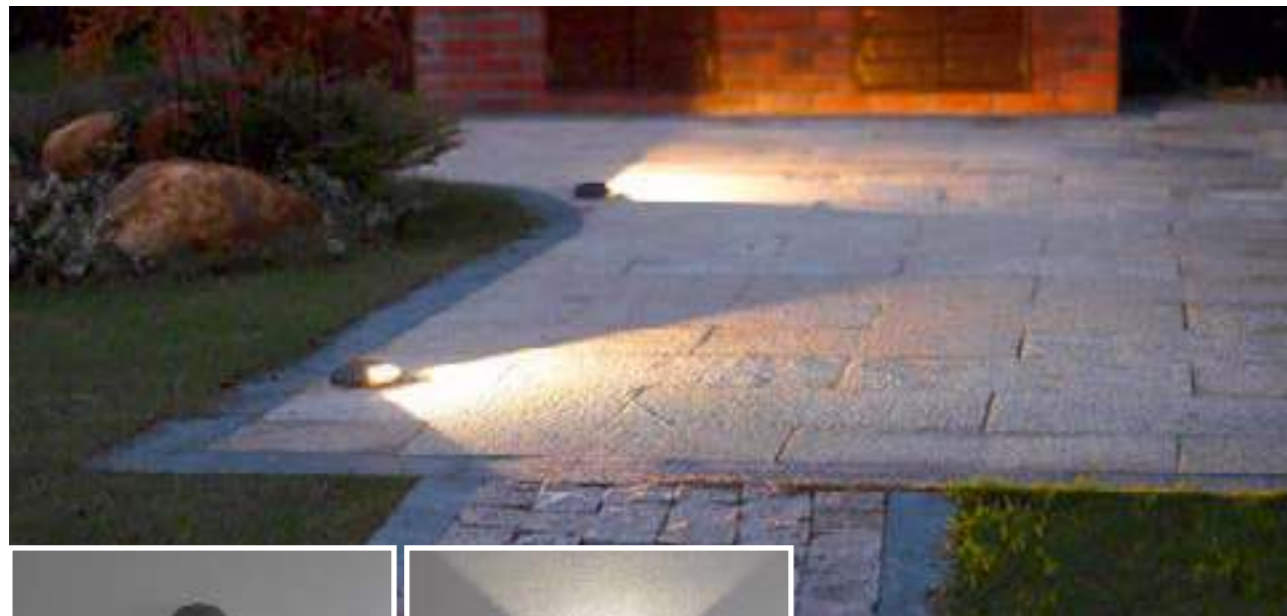


LLO-124

Watt: 7w
 Dimension(mm): 140x125
 Cut-Out(mm): 117x118
 LED chip: CREE
 Material: Die-cast Aluminium+pc
 Body color: silver
 CCT: 3000K
 CRI: T
 Beam Angle: 110°
 Luminous Flux: 67lm
 IP: IP65



LLO-125

Watt: 7w
 Dimension(mm): 140x125
 Cut-Out(mm): 117x118
 LED chip: CREE
 Material: Die-cast Aluminium+pc
 Body color: silver
 CCT: 3000K
 CRI: T
 Beam Angle: 99°
 Luminous Flux: 135lm
 IP: IP65



LLO-126

Watt: 7w
 Dimension(mm): 140x125
 Cut-Out(mm): 117x118
 LED chip: CREE
 Material: Die-cast Aluminium+pc
 Body color: silver
 CCT: 3000K
 CRI: T
 Beam Angle: 70°
 Luminous Flux: 188lm
 IP: IP65



LLO-129I

Watt: 6w
Dimension(mm): 85x110
Cut-Out(mm): 75
LED chip: EPISTAR
Material: Aluminium
Body color: silver
CCT: 3000K
CRI: T
Beam Angle: 2x20x90°
Luminous Flux: 360lm
IP: IP65



LLO-129J

Watt: 6w
Dimension(mm): 85x100
Cut-Out(mm): 75
LED chip: EPISTAR
Material: Aluminium
Body color: silver
CCT: 3000K
CRI: T
Beam Angle: 4x20x90°
Luminous Flux: 720lm
IP: IP65



LLO-129K

Watt: 12w
Dimension(mm): 120x125
Cut-Out(mm): 100
LED chip: EPISTAR
Material: Aluminium
Body color: silver
CCT: 3000K
CRI: T
Beam Angle: 2x20x90°
Luminous Flux: 360lm
IP: IP65




LLO-129L

Watt: 12w
Dimension(mm): 120x125
Cut-Out(mm): 100
LED chip: EPISTAR
Material: Aluminium
Body color: silver
CCT: 3000K
CRI: T
Beam Angle: 4x20x90°
Luminous Flux: 720lm
IP: IP65


200-240V
50-60Hz

EPISTAR

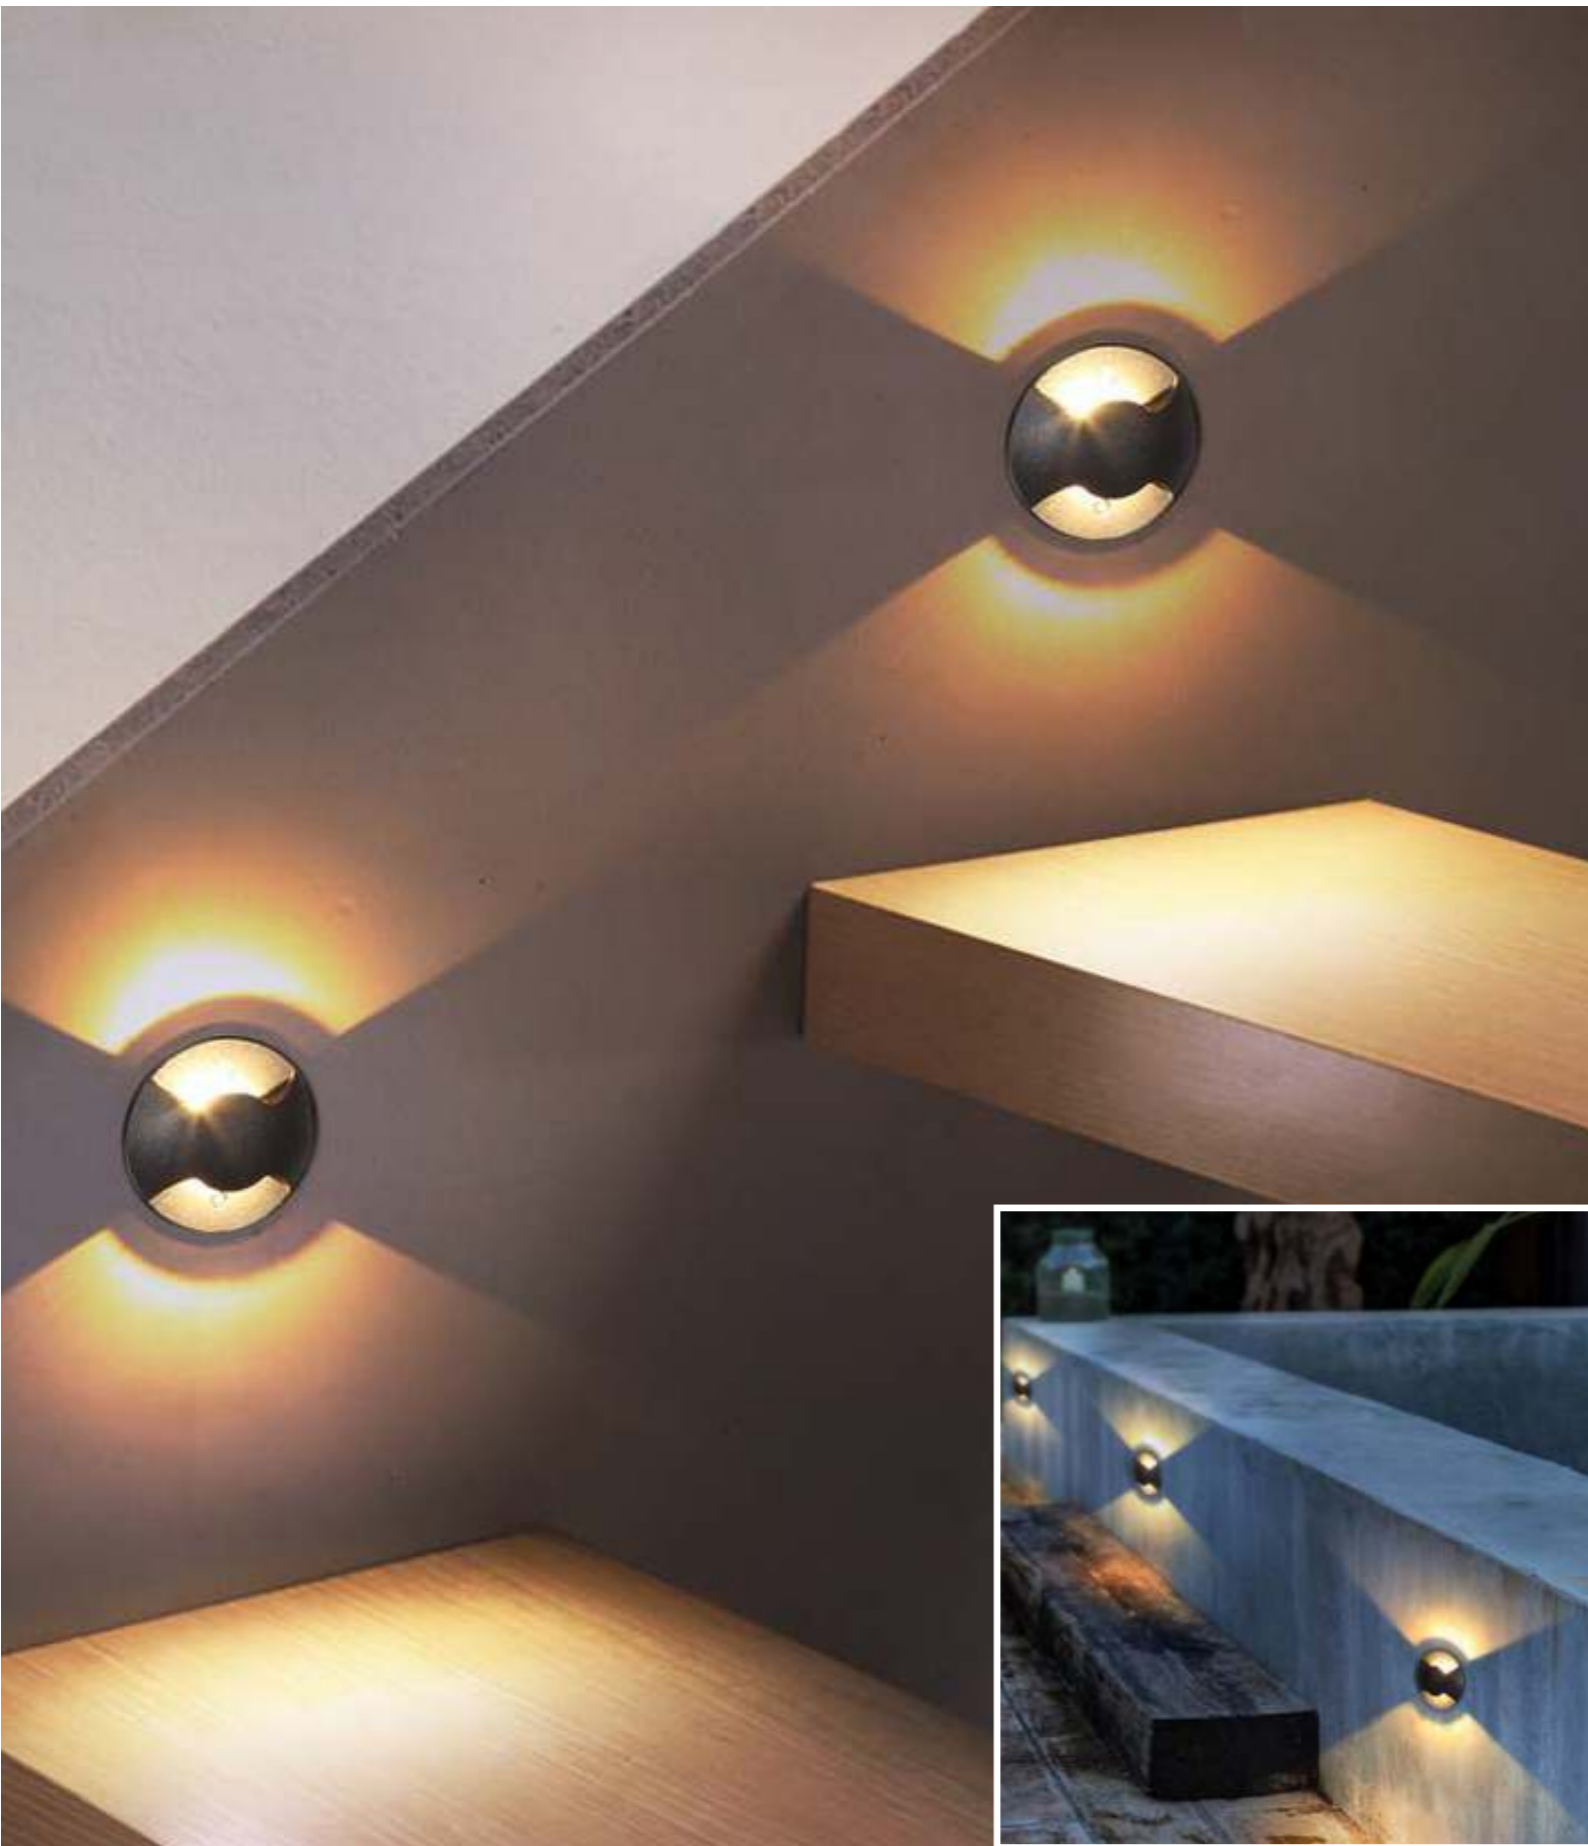


LLO-129E

Watt: 4W
Dimension(mm): 62*85
LED chip: CREE XGP2
Material: ALUMINIUM+PC
Body color: DARK GREY
CCT: 2700K
CRI: >80
Beam Angle: 10°
Luminous Flux: 240LM
IP: IP68




LLO-129M

Watt: 1.5W
Dimension(mm): 210*210*55
LED chip: CREE
Material: ALUMINIUM+PC
Body color: DARK GREY
CCT: 3000K
CRI: >80
Beam Angle: 120°
Luminous Flux: 90LM
IP: IP67




LLO-129N



Watt: 3W
Dimension(mm): 210*210*55
LED chip: CREE
Material: ALUMINIUM+PC
Body color: DARK GREY
CCT: 3000K
CRI: >80
Beam Angle: 120°
Luminous Flux: 180LM
IP: IP67



LLO-129O


Watt: 6W
Dimension(mm): 210*210*55
LED chip: CREE
Material: ALUMINIUM+PC
Body color: DARK GREY
CCT: 3000K
CRI: >80
Beam Angle: 120°
Luminous Flux: 360LM
IP: IP67



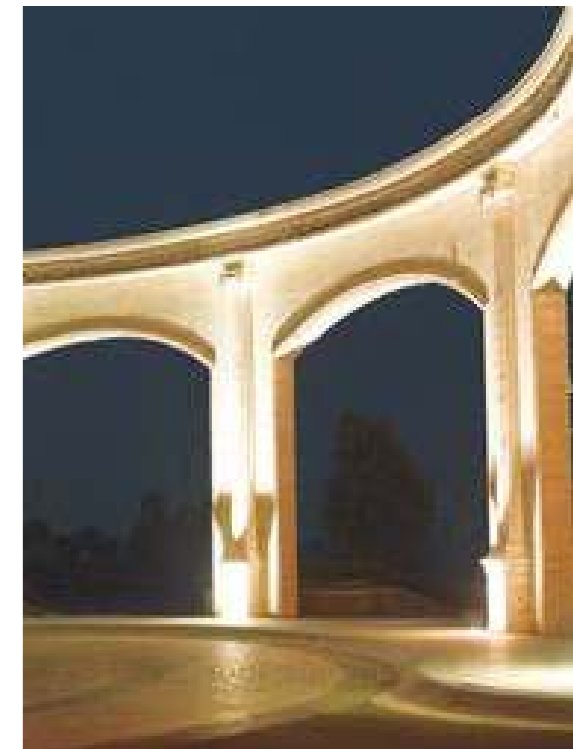


LLO-129F

Watt: 3x3w
Dimension(mm): 110x100
Cut-Out(mm): 100
LED chip: CREE
Material: Die-cast Aluminium+pc
Body color: silver
CCT: 3000K
CRI: T
Beam Angle: 10°
Luminous Flux: 270lm
IP: IP65




LLO-129G

Watt: 6x2w
Dimension(mm): 160x110
Cut-Out(mm): 150
LED chip: CREE
Material: Die-cast Aluminium+pc
Body color: silver
CCT: 3000K
CRI: T
Beam Angle: 10°
Luminous Flux: 360lm
IP: IP65



LLO-129H

Watt: 9x2w
Dimension(mm): 160x110
Cut-Out(mm): 150
LED chip: CREE
Material: Die-cast Aluminium+pc
Body color: silver
CCT: 3000K
CRI: T
Beam Angle: 10°
Luminous Flux: 480lm
IP: IP65



LLO-129B

Watt: 18w
Dimension(mm): 223x215
Cut-Out(mm): 196.2
LED chip: CREE
Material: Aluminium+316ss cover/glass
Body color: silver
CCT: 3000K
CRI: T
Beam Angle: 20°
Luminous Flux: 1447lm
IP: IP67



Adjustable 20°





Anti-glare




LLO-140
Watt: 3w
Dimension(mm): 80x60
Cut-Out(mm): 78
LED chip: CREE
Material: Aluminium
Body color: silver
CCT: 3000K
CRI: T
Beam Angle: 78°
Luminous Flux: 146lm
IP: IP54

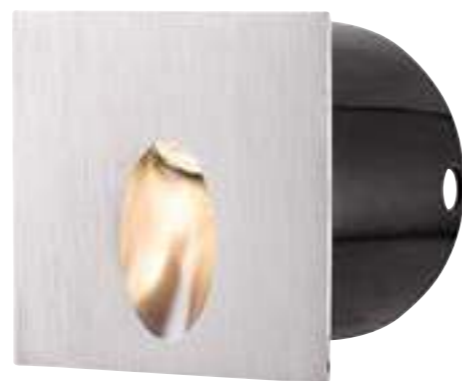


LLO-141
Watt: 3w
Dimension(mm): 80x80x60
Cut-Out(mm): 78x78
LED chip: CREE
Material: Aluminium
Body color: silver
CCT: 3000K
CRI: T
Beam Angle: 78°
Luminous Flux: 146lm
IP: IP54




LLO-159A
Watt: 5w
Dimension(mm): 92x73
Cut-Out(mm): 80x70
LED chip: EPISTAR COB
Material: Aluminium+pc
Body color: silver
CCT: 3000K
CRI: T
Beam Angle: 45°
Luminous Flux: 610lm
IP: IP65



LLO-159B
Watt: 5w
Dimension(mm): 92x73
Cut-Out(mm): 80x70
LED chip: EPISTAR COB
Material: Aluminium+pc
Body color: silver
CCT: 3000K
CRI: T
Beam Angle: 20°
Luminous Flux: 610lm
IP: IP65

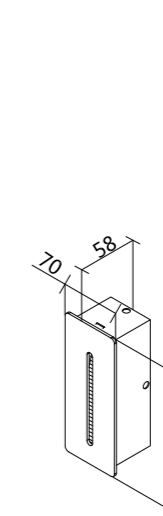


LLO-159C
Watt: 5w
Dimension(mm): 170x70x58
Cut-Out(mm): 56x155x55
LED chip: EPISTAR COB
Material: Aluminium+pc
Body color: silver
CCT: 3000K
CRI: T
Beam Angle: 20°
Luminous Flux: 610lm
IP: IP65



LLO-142

Watt: 2x1w
Dimension(mm): 114x114x65
Cut-Out(mm): 107x107x62
LED chip: CREE
Material: Die-cast Aluminium
Body color: Grey/Black
CCT: 3000K
CRI: T
Beam Angle: 29°
Luminous Flux: 169lm
IP: IP65




LLO-143

Watt: 4x1w
Dimension(mm): 114x170x65
Cut-Out(mm): 107x163x62
LED chip: CREE
Material: Die-cast Aluminium
Body color: Grey/Black
CCT: 3000K
CRI: T
Beam Angle: 31°
Luminous Flux: 327lm
IP: IP65





LLO-159R

Watt: 2W
Dimension(mm): 43x43
Cut-Out(mm): 36x36
LED chip: CREE
Material: ALUMINIUM+PC
Body color: Sand White/Black
CCT: 3000K
CRI: >80
Luminous Flux: 160LM
IP: IP54




LLO-159S

Watt: 2W
Dimension(mm): Φ 43
Cut-Out(mm): 36
LED chip: CREE
Material: ALUMINIUM+PC
Body color: Sand White/Black
CCT: 3000K
CRI: >80
Luminous Flux: 160LM
IP: IP54




LLO-144

Watt: 6x1w
Dimension(mm): 114x226x65
Cut-Out(mm): 107x219x62
LED chip: Grey/Black
Material: Die-cast Aluminium
Body color: Grey
CCT: 3000K
CRI: T
Beam Angle: 29°
Luminous Flux: 529lm
IP: IP65



LLO-148

Watt: 5x1w
Dimension(mm): 250x70x87
Cut-Out(mm): 65x240x87
LED chip: CREE
Material: Aluminium+304grade
Body color: silver
CCT: 3000K
CRI: T
Beam Angle: 86°
Luminous Flux: 184lm
IP: IP67





LLO-145

Watt: 3x1w
Dimension(mm): 170x70x72
Cut-Out(mm): 65x106x72
LED chip: CREE
Material: Aluminium+304grade
Body color: silver
CCT: 3000K
CRI: T
Beam Angle: 84°
Luminous Flux: 105lm
IP: IP65



LLO-147

Watt: 5x1w
Dimension(mm): 250x75x89
Cut-Out(mm): 65x240x87
LED chip: CREE
Material: Aluminium+304grade
Body color: silver
CCT: 3000K
CRI: T
Beam Angle: 31°
Luminous Flux: 448lm
IP: IP67

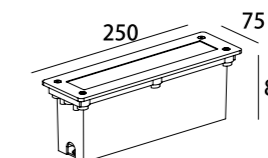


LLO-146

Watt: 3x1w
Dimension(mm): 170x70x74
Cut-Out(mm): 65x106x72
LED chip: CREE
Material: Aluminium+304grade
Body color: silver
CCT: 3000K
CRI: T
Beam Angle: 31°
Luminous Flux: 270lm
IP: IP67




LLO-150

Watt: 3.6w
Dimension(mm): 107x75x65
Cut-Out(mm): 98x62x59
LED chip: Philips
Material: Die-cast Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 33°
Luminous Flux: 75lm
IP: IP65




LLO-151

Watt: 3.6w
Dimension(mm): 107x75x65
Cut-Out(mm): 98x62x59
LED chip: Philips
Material: Die-cast Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 48°
Luminous Flux: 99lm
IP: IP65



LLO-156

Watt: 3w
Dimension(mm): 163x98x65
Cut-Out(mm): 158x97x77
LED chip: Edison
Material: Die-cast Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 120°
Luminous Flux: 150lm
IP: IP54



200-240V
50-60Hz

Edison PHILIPS



LLO-159D

Watt: 3w
Dimension(mm): 35x70
Cut-Out(mm): 30
LED chip: CREE
Material: Aluminium+pc
Body color: silver
CCT: 3000K
CRI: T
Beam Angle: 60°
Luminous Flux: 300-310lm
IP: IP65




LLO-159E

Watt: 3w
Dimension(mm): 35x35x70
Cut-Out(mm): 30x30
LED chip: CREE
Material: Aluminium+pc
Body color: silver
CCT: 3000K
CRI: T
Beam Angle: 60°
Luminous Flux: 300-310lm
IP: IP65



LLO-159F

Watt: 3w
Dimension(mm): 35x70
Cut-Out(mm): 30
LED chip: CREE
Material: Aluminium+pc
Body color: silver
CCT: 3000K
CRI: T
Beam Angle: 10°
Luminous Flux: 300-310lm
IP: IP65

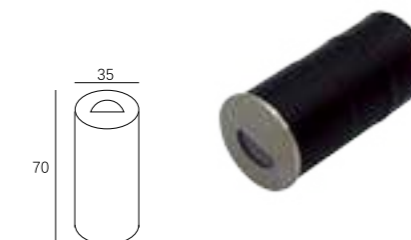

LLO-159G

Watt: 3w
Dimension(mm): 35x70
Cut-Out(mm): 30
LED chip: CREE
Material: Aluminium+pc
Body color: silver
CCT: 3000K
CRI: T
Beam Angle: 30°
Luminous Flux: 300-310lm
IP: IP65



CREE

200-240V
50-60Hz



LLO-160

Watt: 7w
Dimension(mm): 315x76x150
LED chip: CREE
Material: Aluminium+glass
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 23°
Luminous Flux: 433lm
IP: IP65



LLO-163

Watt: 12w
Dimension(mm): 348x165x92
LED chip: CREE
Material: Aluminium+glass
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 23°
Luminous Flux: 864lm
IP: IP65



LLO-170

Watt: 7w
Dimension(mm): 380x83x107
LED chip: CREE
Material: Die-cast Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 24°
Luminous Flux: 436lm
IP: IP65



LLO-175

Watt: 15w
Dimension(mm): 210x247x120
LED chip: AC COB
Material: Die-cast Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 41°
Luminous Flux: 934lm
IP: IP65

100-240V
50-60Hz




200-240V
50-60Hz



073




074

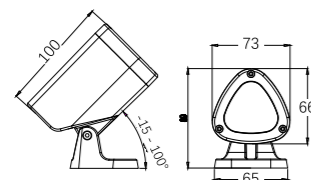

LLO-166

Watt: 3w
Dimension(mm): 65x89x73
LED chip: CREE
Material: Aluminium
Body color: Grey/Black
CCT: 3000K
CRI: T
Beam Angle: 25°
Luminous Flux: 209lm
IP: IP65

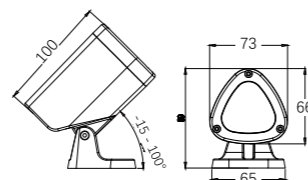

LLO-167

Watt: 3w
Dimension(mm): 65x89x73
LED chip: CREE
Material: Aluminium
Body color: Grey/Black
CCT: 3000K
CRI: T
Beam Angle: 25°
Luminous Flux: 253lm
IP: IP65






LLO-173

Watt: 4x2w
Dimension(mm): 70x80x117/210x50
LED chip: CREE
Material: Die-cast Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 27°
Luminous Flux: 460lm
IP: IP65

LLO-174



Watt: 1x7w
Dimension(mm): 70x80x117/210x50
LED chip: CREE
Material: Die-cast Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 39°
Luminous Flux: 602lm
IP: IP65

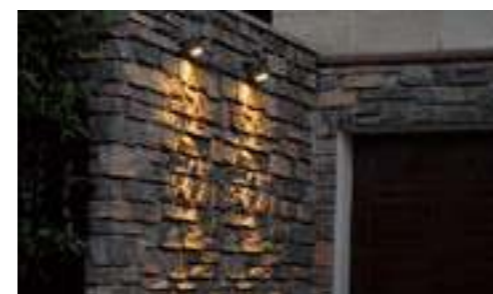



LLO-171

Watt: 15w
Dimension(mm): 265x140x175
LED chip: CREE
Material: Die-cast Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 24°
Luminous Flux: 921lm
IP: IP65



LLO-172


Watt: 12w
Dimension(mm): 200x100x100
LED chip: CREE
Material: Die-cast Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 41°
Luminous Flux: 827lm
IP: IP65



100-240V
50-60Hz


100-240V
50-60Hz






LLO-179

Watt: 2w
Dimension(mm): 30x60
LED chip: Bridgelux
Material: Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 10°
Luminous Flux: 80lm
IP: IP65

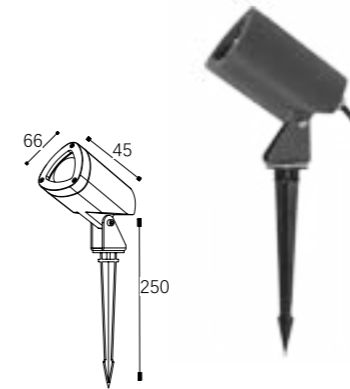


LLO-176

Watt: 3w
Dimension(mm): 66x45x250
LED chip: CREE
Material: Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 36°
Luminous Flux: 300-360lm
IP: IP65




LLO-180

Watt: 6w
Dimension(mm): 36x85
LED chip: /Bridgelux
Material: Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 10°
Luminous Flux: 240lm
IP: IP65

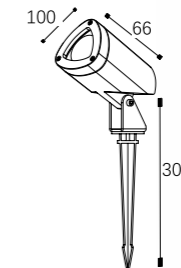


LLO-177

Watt: 7w
Dimension(mm): 100x66x300
LED chip: CREE
Material: Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 36°
Luminous Flux: 520-660lm
IP: IP65



LLO-181

Watt: 12w
Dimension(mm): 50x120
LED chip: Bridgelux
Material: Aluminium
Body color: silver
CCT: 3000K
CRI: T
Beam Angle: 10°
Luminous Flux: 480lm
IP: IP65

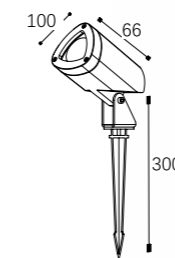


LLO-178

Watt: 12w
Dimension(mm): 100x66x300
LED chip: CREE
Material: Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 36°
Luminous Flux: 1050-1300lm
IP: IP65




LLO-184

Watt: 7W
Dimension(mm): 198x78
LED chip: CREE
Material: ALUMINIUM/PMMA
Body color: DARK GREY
CCT: 3000K
CRI: >80
Beam Angle: 18-45°
Luminous Flux: 636LM
IP: IP54




LLO-182

Watt: 12W
Dimension(mm): 90x139x173
LED chip: CREE
Material: ALUMINIUM+Glass
Body color: DARK GREY
CCT: 3000K
CRI: >80
Beam Angle: 13°
Luminous Flux: 1077LM
IP: IP65




LLO-183

Watt: 12W
Dimension(mm): 88x153x317
LED chip: CREE
Material: ALUMINIUM+Glass
Body color: DARK GREY
CCT: 3000K
CRI: >80
Beam Angle: 13°
Luminous Flux: 1077LM
IP: IP65



LLO-185

Watt: 7W
Dimension(mm): 332x164x77
LED chip: CREE
Material: ALUMINIUM/PMMA
Body color: DARK GREY
CCT: 3000K
CRI: >80
Beam Angle: 18-45°
Luminous Flux: 636LM
IP: IP54

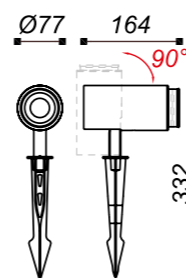



LSP001/002/003/004



LSP005/006/007



LSP009/010/011




24V
50-60Hz

OSRAM EPISTAR

Item	Watt	Dimension (mm)	Cut-Out (mm)	LED chip	Material	Body color	CCT	CRI	Beam Angle	IP	voltage
LSP-001	2w	68x73 68x126x80	80x126	OSRAM	316# stainless steel	silver	3000K	T	30°	IP68	24V
LSP-002	2w	68x73 68x126x80	80x126	EPISTAR	316# stainless steel	silver	BLUE	T	30°	IP68	24V
LSP-003	2w	68x73 68x126x80	80x126	EPISTAR	316# stainless steel	silver	GREEN	T	30°	IP68	24V
LSP-004	3w	68x73 68x126x80	80x126	EPISTAR	316# stainless steel	silver	RGB 3IN 1	T	30°	IP68	24V
LSP-005	4x2w	135x120	127x135	OSRAM	316# stainless steel	silver	3000K	T	30°	IP68	24V
LSP-006	4x2w	135x120	127x135	EPISTAR	316# stainless steel	silver	BLUE	T	30°	IP68	24V
LSP-007	4x2w	135x120	127x135	EPISTAR	316# stainless steel	silver	GREEN	T	30°	IP68	24V
LSP-009	6x2w	180x120	150x165	OSRAM	316# stainless steel	silver	3000K	T	30°	IP68	24V
LSP-010	6x2w	180x120	150x165	EPISTAR	316# stainless steel	silver	BLUE	T	30°	IP68	24V
LSP-011	6x2w	180x120	150x165	EPISTAR	316# stainless steel	silver	GREEN	T	30°	IP68	24V



LSP-013/014/015/016

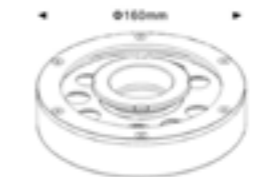

LSP017/18/19/20

24V
50-60Hz

OSRAM EPISTAR


CE RoHS COMPLIANT REACH

Item	Watt	Dimension (mm)	LED chip	Material	Body color	CCT	CRI	Beam Angle	IP	voltage
LSP-013	6x2w	115x32	OSRAM	316# stainless steel	silver	3000K	T	30°	IP68	24V
LSP-014	6x2w	115x32	EPISTAR	316# stainless steel	silver	BLUE	T	30°	IP68	24V
LSP-015	6x2w	115x32	EPISTAR	316# stainless steel	silver	GREEN	T	30°	IP68	24V
LSP-016	6x3w	115x32	EPISTAR	316# stainless steel	silver	RGB 3IN 1	T	30°	IP68	24V

24V
50-60Hz

OSRAM EPISTAR

Item	Watt	Dimension (mm)	LED chip	Material	Body color	CCT	CRI	Beam Angle	IP
LSP-017	9x2w	160x36	OSRAM	316# stainless steel	silver	3000K	T	30°	IP68
LSP-018	9x2w	160x36	EPISTAR	316# stainless steel	silver	BLUE	T	30°	IP68
LSP-019	9x2w	160x36	EPISTAR	316# stainless steel	silver	GREEN	T	30°	IP68
LSP-020	9x3w	160x36	EPISTAR	316# stainless steel	silver	RGB 3IN 1	T	30°	IP68



LSP022

Watt: 1x2w
Dimension(mm): 70x70x67.5
LED chip: EPISTAR
Material: 316# stainless steel
CCT: RGB
CRI: T
Beam Angle: 30°
IP: IP68
voltage: 24V



LSP021

Watt: 1x2w
Dimension(mm): 70x70x67.5
LED chip: OSRAM
Material: 316# stainless steel
CCT: 3000K
CRI: T
Beam Angle: 30°
IP: IP68
voltage: 24V



LSP025

Watt: 6x2w
Dimension(mm): 225x130x38
LED chip: OSRAM
Material: 316# stainless steel
CCT: 3000K
CRI: T
Beam Angle: 30°
IP: IP68
voltage: 24V

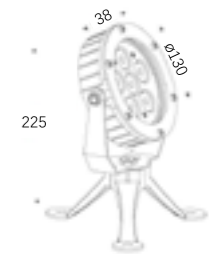


LSP023

Watt: 3x2w
Dimension(mm): 161x38x90
LED chip: OSRAM
Material: 316# stainless steel silver
CCT: 3000K
CRI: T
Beam Angle: 30°
IP: IP68
voltage: 24V



LSP028

Watt: 3X1w
Dimension(mm): 52x85
LED chip: Bridgelux
Material: Aluminium
Body color: silver
CCT: 3000K
CRI: T
Beam Angle: 30°
IP: IP68
voltage: 12V





LLO-029

Watt: 7w
 Dimension(mm): 140x90
 LED chip: CREE
 Material: Aluminium+glass
 Body color: Black
 CCT: 3000K
 CRI: T
 Beam Angle: 55°
 Luminous Flux: 477lm
 IP: IP54



LB-032

Watt: 7w
 Dimension(mm): 250x90
 LED chip: CREE
 Material: Aluminium+glass
 Body color: Black
 CCT: 3000K
 CRI: T
 Beam Angle: 55°
 Luminous Flux: 477lm
 IP: IP54



LB-033

Watt: 7w
 Dimension(mm): 450x90
 LED chip: CREE
 Material: Aluminium+glass
 Body color: Black
 CCT: 3000K
 CRI: T
 Beam Angle: 55°
 Luminous Flux: 477lm
 IP: IP54



LB-034


Watt: 7w
 Dimension(mm): 650x90
 LED chip: CREE
 Material: Aluminium+glass
 Body color: Black
 CCT: 3000K
 CRI: T
 Beam Angle: 55°
 Luminous Flux: 477lm
 IP: IP54

CE **RoHS** COMPLIANT **REACH**

CREE

100-240V
50-60Hz



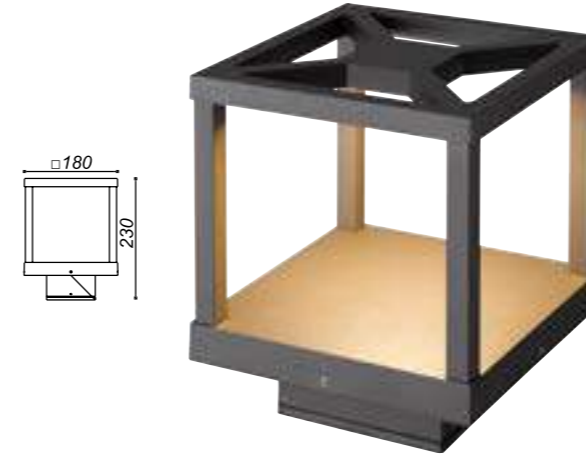


LB-036

Watt: 12w
 Dimension(mm): 230x180
 LED chip: CREE
 Material: Aluminium
 Body color: Black
 CCT: 3000K
 CRI: T
 Beam Angle: 360°
 Luminous Flux: 870lm
 IP: IP54



LB-037

Watt: 12w
 Dimension(mm): 500x180
 LED chip: CREE
 Material: Aluminium
 Body color: Black
 CCT: 3000K
 CRI: T
 Beam Angle: 360°
 Luminous Flux: 1100lm
 IP: IP54

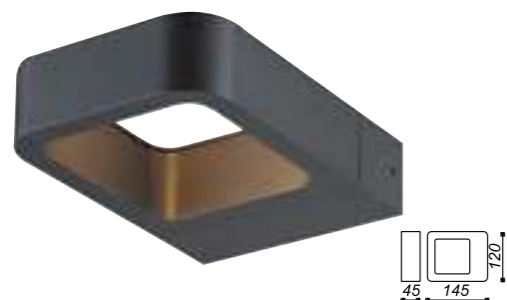


LLO-083

Watt: 1x7w
Dimension(mm): 145x120x45
LED chip: CREE
Material: Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 272°
Luminous Flux: 389lm
IP: IP54



LB-039

Watt: 7w
Dimension(mm): 650x160x54
LED chip: CREE
Material: Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 329°
Luminous Flux: 497lm
IP: IP54

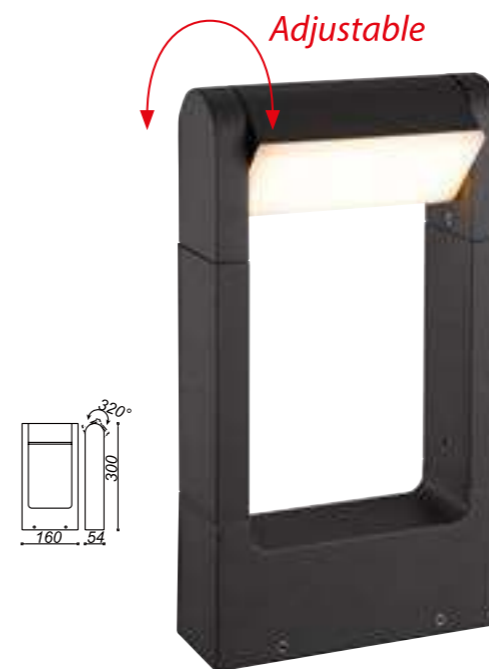

LB-063

Watt: 6w
Dimension(mm): 300x160x54
LED chip: EVERLIGHT
Material: Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 117° /320°
Luminous Flux: 433lm
IP: IP54



LB-038

Watt: 7w
Dimension(mm): 300x160x54
LED chip: CREE
Material: Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 329°
Luminous Flux: 497lm
IP: IP54



LB-064

Watt: 6w
Dimension(mm): 650x160x54
LED chip: EVERLIGHT
Material: Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 117° /320°
Luminous Flux: 433lm
IP: IP54






PHILIPS

200-240V
50-60Hz


200-240V
50-60Hz

PHILIPS




LB-042

Watt: 5w
Dimension(mm): 600x75x75
LED chip: Philips AC LED
Material: Die-cast Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 43°
Luminous Flux: 195lm
IP: IP54




LB-054

Watt: 5W
Dimension(mm): 600x75x75
LED chip: Philips AC LED
Material: Die-cast Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 42°
Luminous Flux: 98lm
IP: IP54




LB-088

Watt: 10w
Dimension(mm): 600x120x82
LED chip: Philips AC LED
Material: Die-cast Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 52°
Luminous Flux: 526lm
IP: IP54




LB-096

Watt: 15w
Dimension(mm): 500x141x141/650x141x141
LED chip: Philips AC LED
Material: Die-cast Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 47°
Luminous Flux: 858lm
IP: IP54



LLO-077

Watt: 6w
Dimension(mm): 183x186x60
LED chip: OSRAM
Material: Die-cast Aluminium+pc
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 141°
Luminous Flux: 449lm
IP: IP54




LLO-027

Watt: 9w
Dimension(mm): 200x69x103
LED chip: OSRAM
Material: Die-cast Aluminium+pc
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 350°
Luminous Flux: 364lm
IP: IP54




LB-047

Watt: 6w
Dimension(mm): 186x183x300
LED chip: OSRAM
Material: Die-cast Aluminium+pc
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 141°
Luminous Flux: 400lm
IP: IP54

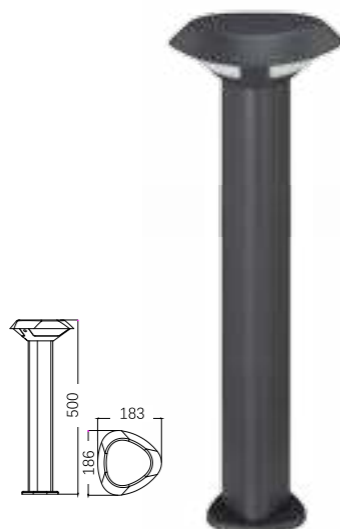


LB-048

Watt: 6w
Dimension(mm): 186x183x500
LED chip: OSRAM
Material: Die-cast Aluminium+pc
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 141°
Luminous Flux: 400lm
IP: IP54

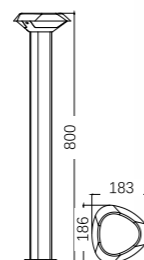

LB-049

Watt: 6w
Dimension(mm): 186x183x800
LED chip: OSRAM
Material: Die-cast Aluminium+pc
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 141°
Luminous Flux: 400lm
IP: IP54

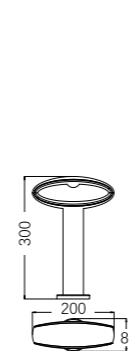


LB-050

Watt: 9w
Dimension(mm): 300x200x80
LED chip: OSRAM
Material: Die-cast Aluminium+pc
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 350°
Luminous Flux: 350lm
IP: IP54




LB-051

Watt: 9w
Dimension(mm): 500x200x80
LED chip: OSRAM
Material: Die-cast Aluminium+pc
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 350°
Luminous Flux: 350lm
IP: IP54

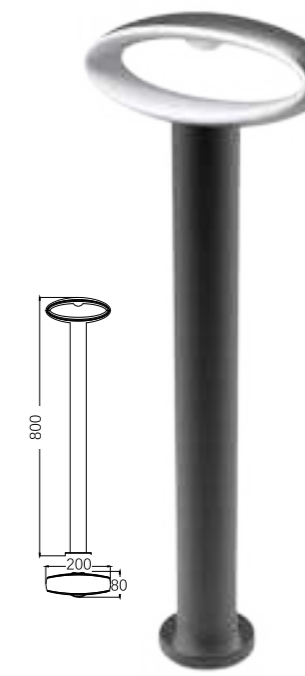



LB-052

Watt: 9w
Dimension(mm): 800x200x80
LED chip: OSRAM
Material: Die-cast Aluminium+pc
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 350°
Luminous Flux: 350lm
IP: IP54

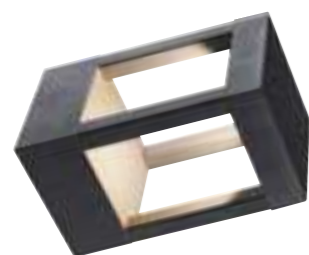


LL0-014

Watt: 7w
Dimension(mm): 160x108x108
LED chip: CREE
Material: Die-cast Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 36°
Luminous Flux: 353lm
IP: IP54




LB-058

Watt: 7w
Dimension(mm): 200x108x108
LED chip: CREE
Material: Die-cast Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 38°
Luminous Flux: 400lm
IP: IP54

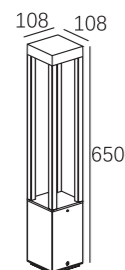



LB-059

Watt: 7w
Dimension(mm): 650x108x108
LED chip: CREE
Material: Die-cast Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 29°
Luminous Flux: 356lm
IP: IP54

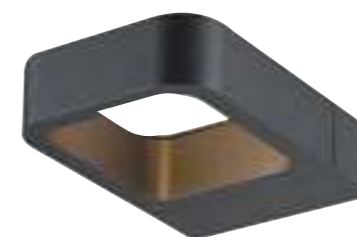


LL0-097

Watt: 7w
Dimension(mm): 175x120x40
LED chip: CREE
Material: Die-cast Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 160°
Luminous Flux: 290lm
IP: IP54



LB-056

Watt: 7w
Dimension(mm): 350x120x40
LED chip: CREE
Material: Die-cast Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 45°
Luminous Flux: 290lm
IP: IP54



LB-057

Watt: 7w
Dimension(mm): 650x120x40
LED chip: CREE
Material: Die-cast Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 45°
Luminous Flux: 290lm
IP: IP54



200-240V
50-60Hz




200-240V
50-60Hz



LLO-070

Watt: 9w
Dimension(mm): 239.5x110x176
LED chip: EVERLIGHT-AC LED
Material: Aluminium+pc
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 185°
Luminous Flux: 659lm
IP: IP65




LB-072

Watt: 9w
Dimension(mm): 500x110
LED chip: EVERLIGHT-AC LED
Material: Aluminium+pc
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 185°
Luminous Flux: 659lm
IP: IP65




LB-073

Watt: 9w
Dimension(mm): 900x110
LED chip: EVERLIGHT-AC LED
Material: Aluminium+pc
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 185°
Luminous Flux: 659lm
IP: IP65

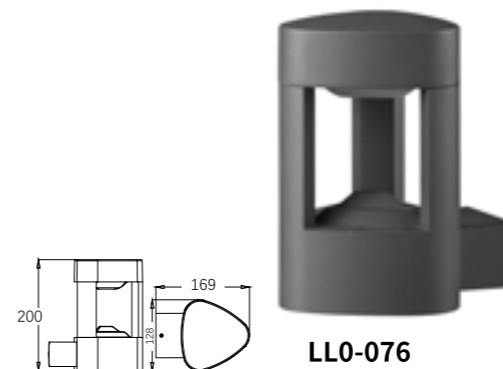


LLO-076

Watt: 6w
Dimension(mm): 200x128x169
LED chip: OSRAM
Material: Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 175°
Luminous Flux: 215lm
IP: IP54

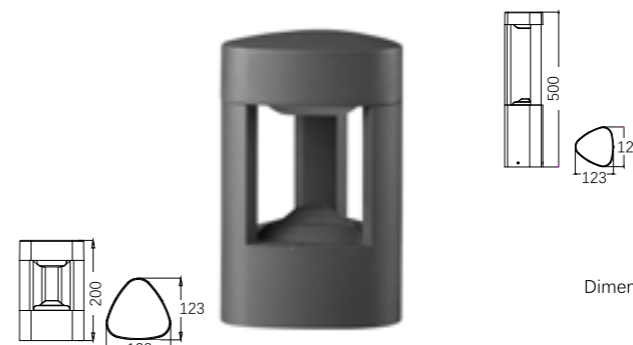

LB-074

Watt: 6w
Dimension(mm): 200x128x123
LED chip: OSRAM
Material: Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 175°
Luminous Flux: 201lm
IP: IP54

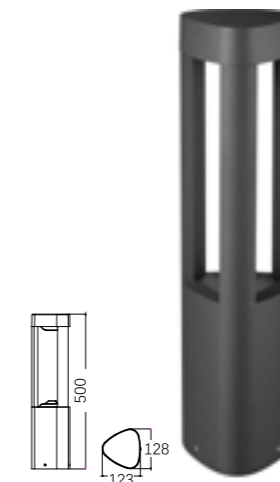

LB-075

Watt: 6w
Dimension(mm): 500x128x123
LED chip: OSRAM
Material: Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 175°
Luminous Flux: 258lm
IP: IP54



LB-076

Watt: 6w
Dimension(mm): 800x128x123
LED chip: OSRAM
Material: Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 175°
Luminous Flux: 254lm
IP: IP54




LLO-026

Watt: 6w
Dimension(mm): 250x234x150
LED chip: EPISTAR
Material: Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 106°
Luminous Flux: 240lm
IP: IP54




LB-080

Watt: 6w
Dimension(mm): 300x176x234
LED chip: EPISTAR
Material: Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 106°
Luminous Flux: 210lm
IP: IP54

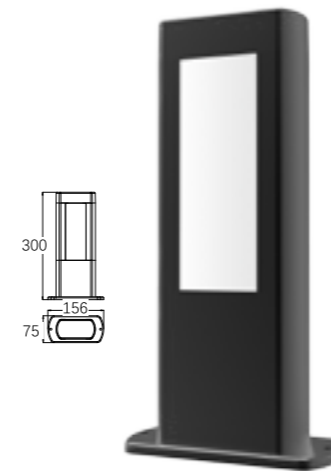


LB-077

Watt: 9w
Dimension(mm): 300x156x75
LED chip: EPISTAR
Material: Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 110° x2
Luminous Flux: 518lm
IP: IP54

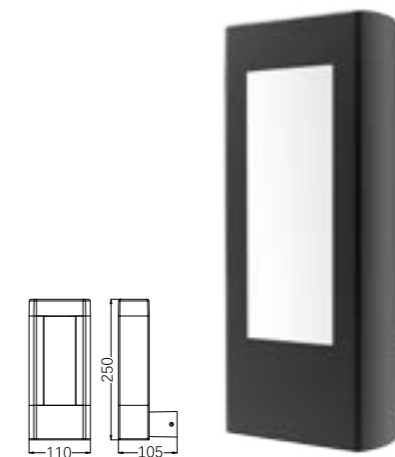


LLO-075

Watt: 9w
Dimension(mm): 250x110x105
LED chip: EPISTAR
Material: Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 110° x2
Luminous Flux: 562lm
IP: IP54

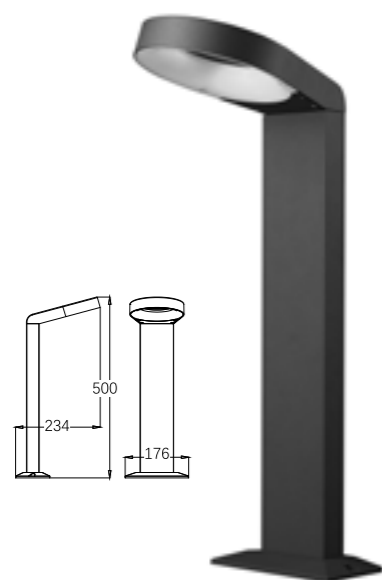


LB-081

Watt: 6w
Dimension(mm): 500x176x234
LED chip: EPISTAR
Material: Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 106°
Luminous Flux: 210lm
IP: IP54

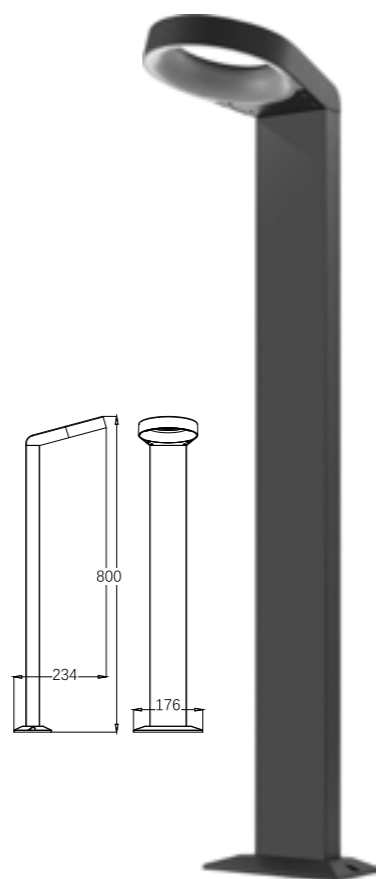


LB-082

Watt: 6w
Dimension(mm): 800x176x234
LED chip: EPISTAR
Material: Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 106°
Luminous Flux: 210lm
IP: IP54

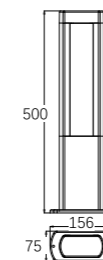


LB-078

Watt: 12w
Dimension(mm): 500x156x75
LED chip: EPISTAR
Material: Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 110° x2
Luminous Flux: 663lm
IP: IP54




LB-079

Watt: 12w
Dimension(mm): 800x156x75
LED chip: EPISTAR
Material: Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 110° x2
Luminous Flux: 756lm
IP: IP54




LB-083

Watt: 7w
 Dimension(mm): 200x90
 LED chip: CREE
 Material: Die-cast Aluminium
 Body color: Black
 CCT: 3000K
 CRI: T
 Beam Angle: 40°
 Luminous Flux: 419lm
 IP: IP54




LLO-038

Watt: 7w
 Dimension(mm): 160x90
 LED chip: CREE
 Material: Die-cast Aluminium
 Body color: Black
 CCT: 3000K
 CRI: T
 Beam Angle: 40°
 Luminous Flux: 423lm
 IP: IP54

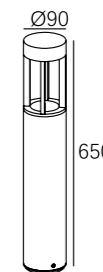

LB-084

Watt: 7w
 Dimension(mm): 650x90
 LED chip: CREE
 Material: Die-cast Aluminium
 Body color: silver
 CCT: 3000K
 CRI: T
 Beam Angle: 40°
 Luminous Flux: 420lm
 IP: IP54




LLO-037

Watt: 10w
Dimension(mm): 70x210
LED chip: CREE
Material: Die-cast Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 360°
Luminous Flux: 364lm
IP: IP54



LB-086

Watt: 10w
Dimension(mm): 750x210
LED chip: CREE
Material: Die-cast Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 197°
Luminous Flux: 290lm
IP: IP54





LB-087

Watt: 10w
Dimension(mm): 220x210
LED chip: CREE
Material: Die-cast Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 197°
Luminous Flux: 290lm
IP: IP54





LLO-010

Watt: 12w
Dimension(mm): 150x151x151
LED chip: OSRAM
Material: Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 270°
Luminous Flux: 330lm
IP: IP54

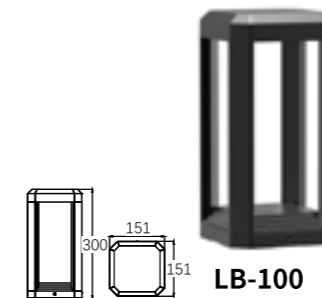



LB-100

Watt: 10w
Dimension(mm): 300x151x151
LED chip: CREE
Material: Die-cast Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 197°
Luminous Flux: 290lm
IP: IP54

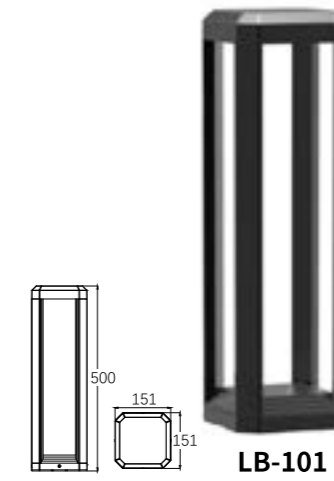


LB-101

Watt: 12w
Dimension(mm): 500x151x151
LED chip: OSRAM
Material: Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 270°
Luminous Flux: 580lm
IP: IP54

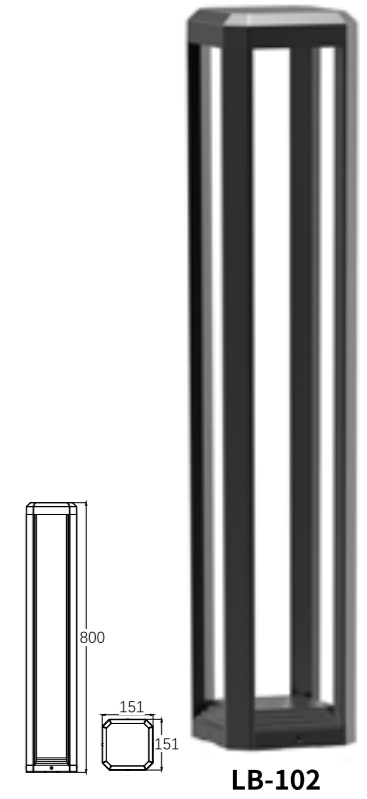

LB-102

Watt: 12w
Dimension(mm): 800x151x151
LED chip: OSRAM
Material: Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 270°
Luminous Flux: 580lm
IP: IP54


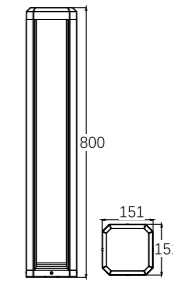




LLO-099I




Watt: 12w
Dimension(mm): 200x125x125
LED chip: OSRAM
Material: Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 60°
Luminous Flux: 609lm
IP: IP54

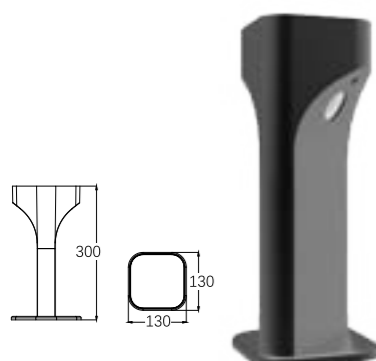


LB-105

Watt: 6w
Dimension(mm): 300x130x130
LED chip: OSRAM
Material: Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 60°
Luminous Flux: 500lm
IP: IP54




LB-106

Watt: 6w
Dimension(mm): 500x130x130
LED chip: OSRAM
Material: Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 60°
Luminous Flux: 500lm
IP: IP54

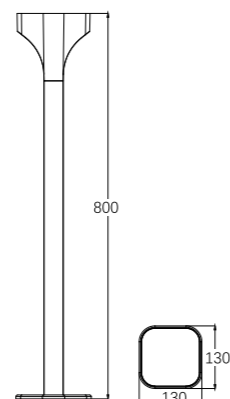


LB-107

Watt: 6w
Dimension(mm): 800x130x130
LED chip: OSRAM
Material: Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 60°
Luminous Flux: 500lm
IP: IP54




LB-111

Watt: 14w
Dimension(mm): 150x150x160
LED chip: EPISTAR SMD
Material: Die-cast Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 81°
Luminous Flux: 2000lm
IP: IP65




LB-099

Watt: 18w
Dimension(mm): 220x220x245
LED chip: PHILIPS-AC LED
Material: Die-cast Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 81°
Luminous Flux: 737lm
IP: IP65

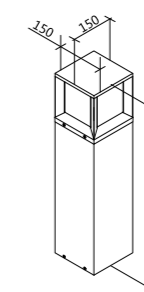


LB-112


Watt: 20w
Dimension(mm): 150x150x600
LED chip: EPISTAR SMD
Material: Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 120°
Luminous Flux: 1600lm
IP: IP65



LB-122
Watt: 18W
Dimension(mm): 145x500
LED chip: SMD-EVERLIGHT
Material: ALUMINIUM+PC
Body color: DARK GREY
CCT: 3000K
CRI: >80
Beam Angle: 360°
Luminous Flux: 1062LM
IP: IP54



LB-123
Watt: 18W
Dimension(mm): 145x900
LED chip: SMD-EVERLIGHT
Material: ALUMINIUM+PC
Body color: DARK GREY
CCT: 3000K
CRI: >80
Beam Angle: 360°
Luminous Flux: 1062LM
IP: IP54



LB-124
Watt: 9W
Dimension(mm): 147x500
LED chip: SMD-EVERLIGHT
Material: ALUMINIUM+PC
Body color: DARK GREY
CCT: 3000K
CRI: >80
Beam Angle: 360°
Luminous Flux: 814LM
IP: IP54




LB-125
Watt: 9W
Dimension(mm): 147x900
LED chip: SMD-EVERLIGHT
Material: ALUMINIUM+PC
Body color: DARK GREY
CCT: 3000K
CRI: >80
Beam Angle: 360°
Luminous Flux: 814LM
IP: IP54




LLO-079D

Watt: 6W
Dimension(mm): 135x131x101
LED chip: SMD-EVERLIGHT
Material: Aluminium+PC
Body color: DARK GREY
CCT: 3000K
CRI: >80
Beam Angle: 360°
Luminous Flux: 439LM
IP: IP54




LB-127


Watt: 6W
Dimension(mm): 101x500
LED chip: SMD-EVERLIGHT
Material: ALUMINIUM+PC
Body color: DARK GREY
CCT: 3000K
CRI: >80
Beam Angle: 360°
Luminous Flux: 439M
IP: IP54



LB-128


Watt: 6W
Dimension(mm): 101x750
LED chip: SMD-EVERLIGHT
Material: ALUMINIUM+PC
Body color: DARK GREY
CCT: 3000K
CRI: >80
Beam Angle: 360°
Luminous Flux: 439LM
IP: IP54



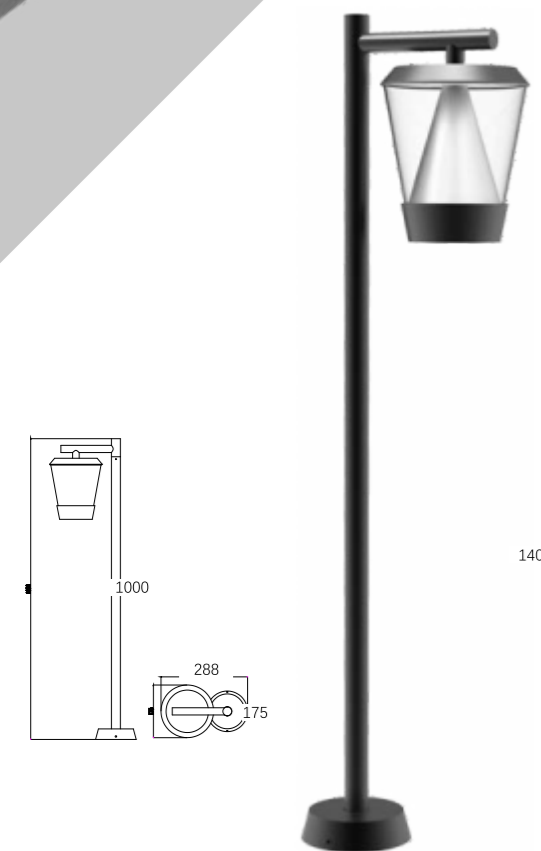

LB-135

Watt: 13W
Dimension(mm): 1000*175*288
LED chip: OSRAM
Material: ALUMINIUM
Body color: DARK GREY
CCT: 3000K
CRI: >80
IP: IP65

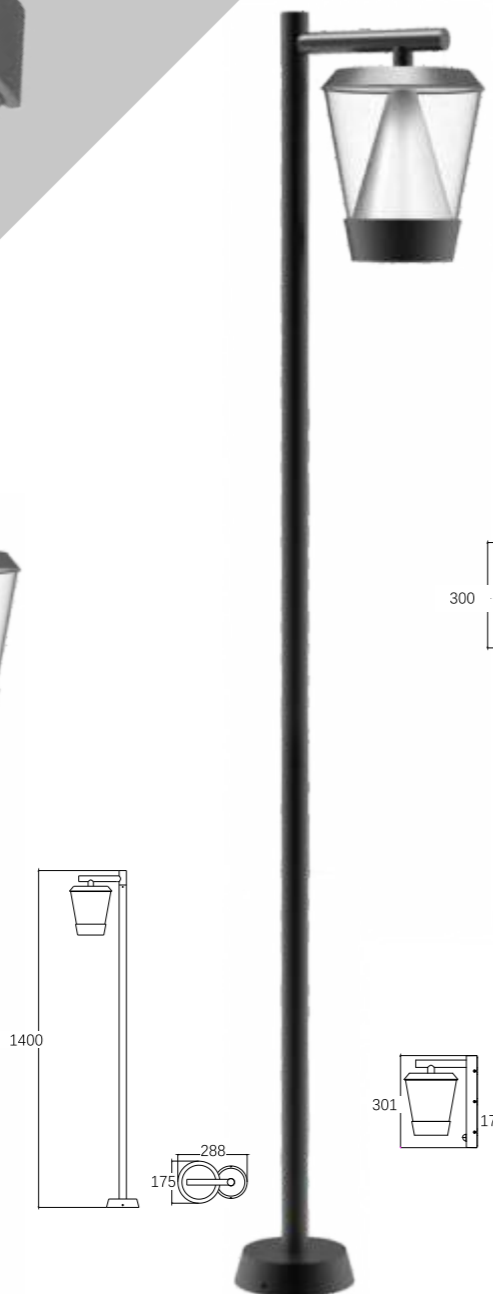


LB-136

Watt: 13W
Dimension(mm): 1400*175*288
LED chip: OSRAM
Material: ALUMINIUM
Body color: DARK GREY
CCT: 3000K
CRI: >80
IP: IP65




LB-144

Watt: 23W
Dimension(mm): 317*300
LED chip: OSRAM
Material: ALUMINIUM
Body color: DARK GREY
CCT: 3000K
CRI: >80
IP: IP65

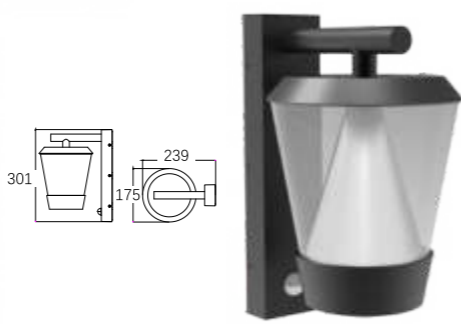

LLO-099S

Watt: 13W
Dimension(mm): 301*175*239
LED chip: OSRAM
Material: ALUMINIUM
Body color: DARK GREY
CCT: 3000K
CRI: >80
Beam Angle: 157°
Luminous Flux: 753LM
IP: IP65

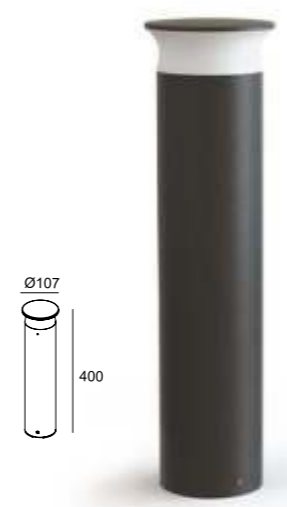

LB-137

Watt: 9W
Dimension(mm): ø107*400
LED chip: EPISTAR
Material: ALUMINIUM+PC
Body color: DARK GREY
CCT: 3000K
CRI: >80
Beam Angle: 120°
Luminous Flux: 540LM
IP: IP65



LB-138

Watt: 9W
Dimension(mm): ø107*600
LED chip: EPISTAR
Material: ALUMINIUM+PC
Body color: DARK GREY
CCT: 3000K
CRI: >80
Beam Angle: 120°
Luminous Flux: 540LM
IP: IP65





LB-139

Watt: 9W
Dimension(mm): ø107*800
LED chip: EPISTAR
Material: ALUMINIUM+PC
Body color: DARK GREY
CCT: 3000K
CRI: >80
Beam Angle: 120°
Luminous Flux: 540LM
IP: IP65



LLO-079P



Watt: 9W
Dimension(mm): 107*120*275
LED chip: EPISTAR
Material: ALUMINIUM+PC
Body color: DARK GREY
CCT: 3000K
CRI: >80
Beam Angle: 120°
Luminous Flux: 540LM
IP: IP65

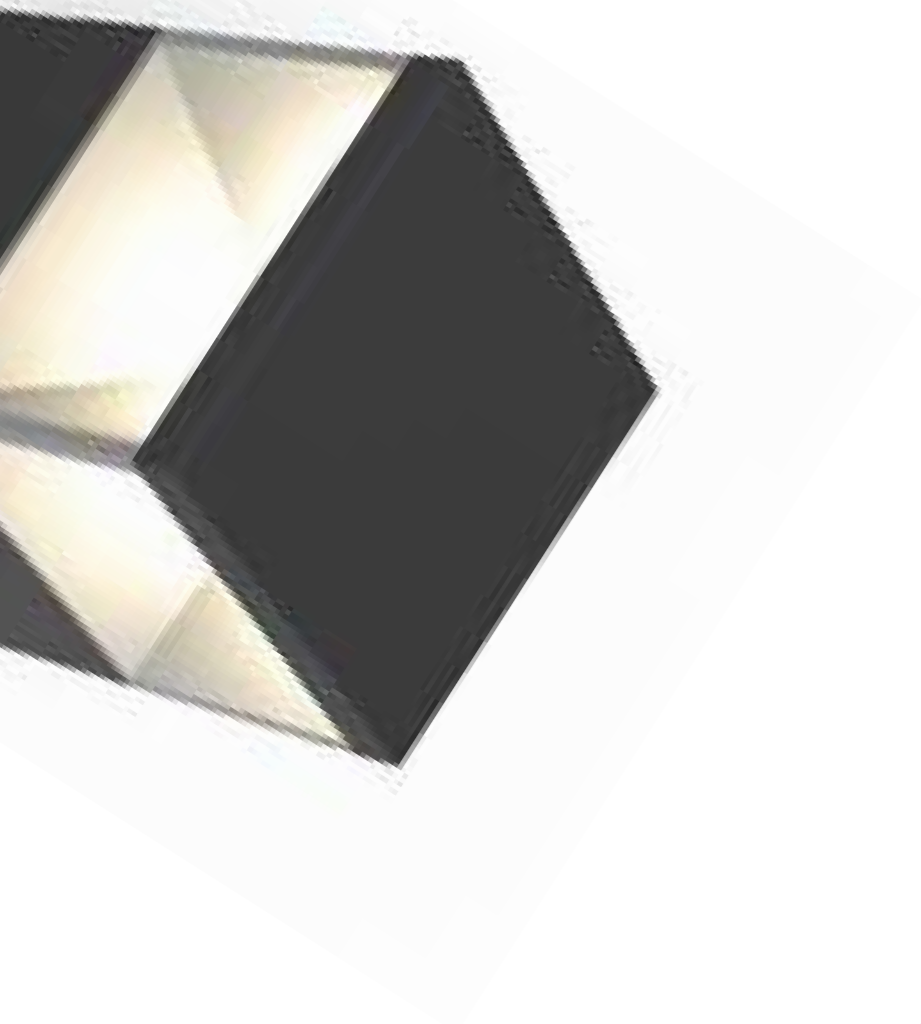

LLO-079Q


Watt: 12W
 Dimension(mm): 150*100*100
 LED chip: EPISTAR
 Material: ALUMINIUM+PC
 Body color: DARK GREY
 CCT: 3000K
 CRI: >80
 Beam Angle: 120°
 Luminous Flux: 720LM
 IP: IP65

EPISTAR

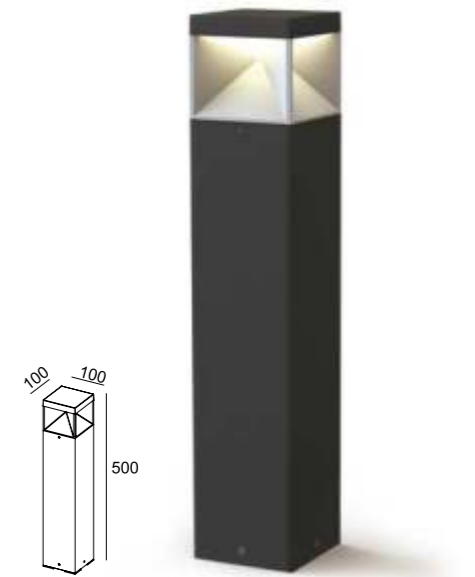

LB-140

Watt: 12W
 Dimension(mm): 100*100*500
 LED chip: EPISTAR
 Material: ALUMINIUM+PC
 Body color: DARK GREY
 CCT: 3000K
 CRI: >80
 Beam Angle: 120°
 Luminous Flux: 720LM
 IP: IP65

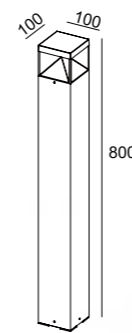


LB-141

Watt: 12W
 Dimension(mm): 100*100*800
 LED chip: EPISTAR
 Material: ALUMINIUM+PC
 Body color: DARK GREY
 CCT: 3000K
 CRI: >80
 Beam Angle: 120°
 Luminous Flux: 720LM
 IP: IP65


EPISTAR





LLO-079C

Watt: 7w
 Dimension(mm): 222x282x165
 LED chip: Philips
 Material: Die-cast Aluminium
 Body color: Black
 CCT: 3000K
 CRI: T
 Beam Angle: 105°
 Luminous Flux: 555lm
 IP: IP65



LB-108

Watt: 7w
 Dimension(mm): 165x650x120
 LED chip: Philips
 Material: Die-cast Aluminium
 Body color: Black
 CCT: 3000K
 CRI: T
 Beam Angle: 47°
 Luminous Flux: 565lm
 IP: IP65




LB-109

Watt: 2.2w
 Dimension(mm): 110x100x380
 LED chip: Philips
 Material: Die-cast Aluminium
 Body color: White
 CCT: 3000K
 CRI: T
 Beam Angle: 45°
 Luminous Flux: 188lm
 IP: IP65



PORTABLE/RECHARGABLE



LB-001

Watt: 18w
Dimension(mm): 200x110
LED: E27 HOLDER
Material: Aluminium+glass
Body color: Black
CRI: T
IP: IP44




LB-002

Watt: 18w
Dimension(mm): 650x110
LED: E27 HOLDER
Material: Aluminium+glass
Body color: Black
CRI: T
IP: IP44





LB-006

Watt: 26w
Dimension(mm): 220x150
LED: E27 HOLDER
Material: Aluminium+glass
Body color: Black
CRI: T
IP: IP44




LB-005

Watt: 26w
Dimension(mm): 220x270
LED: E27 HOLDER
Material: Aluminium+glass
Body color: Black
CRI: T
IP: IP44

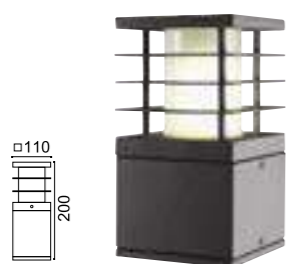

LB-003


Watt: 18w
Dimension(mm): 200x110
LED: E27 HOLDER
Material: Aluminium+glass
Body color: Black
CRI: T
IP: IP44



LB-004


Watt: 18w
Dimension(mm): 650x110
LED: E27 HOLDER
Material: Aluminium+glass
Body color: Black
CRI: T
IP: IP44






LB-119

Dimension(mm): 227x227x255
LED: E27 HOLDER
Material: Aluminium+pc
Body color: Black
CRI: T
IP: IP65




LB-120

Dimension(mm): 170x170x210
LED: E27 HOLDER
Material: Aluminium+pc
Body color: Black
CRI: T
IP: IP65




LB-121

Dimension(mm): 350x350x395
LED: E27 HOLDER
Material: Aluminium+pc
Body color: Black
CRI: T
IP: IP65

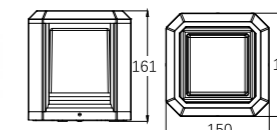

LB-021

Watt: 23w
Dimension(mm): 150x150x161
LED: E27 HOLDER
Material: Aluminium+pc
Body color: Black
CRI: T
IP: IP65

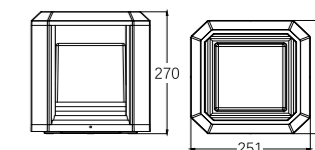


LB-022

Watt: 23w
Dimension(mm): 251x251x270
LED: E27 HOLDER
Material: Aluminium+pc
Body color: Black
CRI: T
IP: IP65



LB-007

Watt: 18w
Dimension(mm): 200x220
LED: E27 HOLDER
Material: Aluminium+pc
Body color: Black
CRI: T
IP: IP44

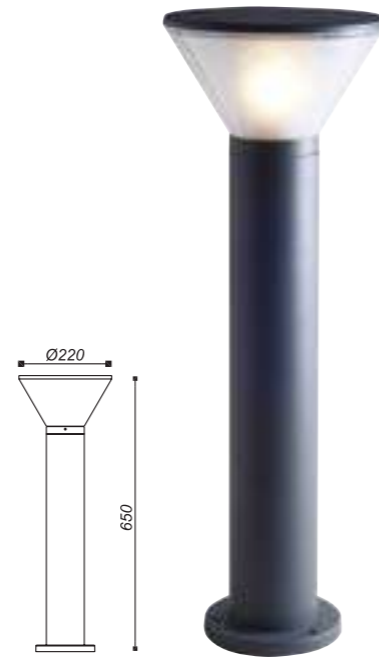


LB-008

Watt: 18w
Dimension(mm): 650x220
LED: E27 HOLDER
Material: Aluminium+pc
Body color: Black
CRI: T
IP: IP44



LWL-033

Watt: 18w
Dimension(mm): 285x200
LED: E27 HOLDER
Material: Aluminium+pc
Body color: Black
CRI: T
IP: IP44



LWL-004

Watt: 18w
Dimension(mm): 220x200x277
LED: E27 HOLDER
Material: Aluminium+pc
Body color: Black
CRI: T
IP: IP44




LB-013

Watt: 18w
Dimension(mm): 200x220
LED: E27 HOLDER
Material: Aluminium+pc
Body color: Black
CRI: T
IP: IP44



LB-014

Watt: 18w
Dimension(mm): 650x220
LED: E27 HOLDER
Material: Aluminium+pc
Body color: Black
CRI: T
IP: IP44

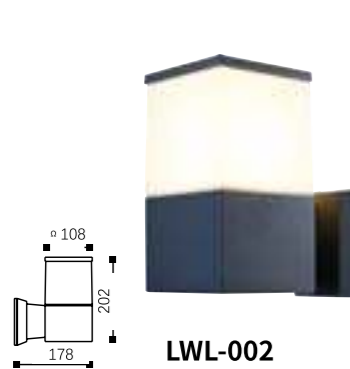


LWL-002

Watt: 20w
Dimension(mm): 108x178x202
LED: E27 HOLDER
Material: Aluminium+pc
Body color: Black
CRI: T
IP: IP44



LWL-001

Watt: 18w
Dimension(mm): 285x137x92
LED: E27 HOLDER
Material: Aluminium+pc
Body color: Black
CRI: T
IP: IP44



LB-009

Watt: 18w
Dimension(mm): 200x108
LED: E27 HOLDER
Material: Aluminium+pc
Body color: Black
CRI: T
IP: IP44



LB-010

Watt: 18w
Dimension(mm): 650x108
LED: E27 HOLDER
Material: Aluminium+pc
Body color: Black
CRI: T
IP: IP44



LB-011

Watt: 20w
Dimension(mm): 200x108x180
LED: E27 HOLDER
Material: Aluminium+pc
Body color: Black
CRI: T
IP: IP44




LWL-003

Watt: 18w
Dimension(mm): 200x108x180
LED: E27 HOLDER
Material: Aluminium+pc
Body color: Black
CRI: T
IP: IP44





LB-012

Watt: 20w
Dimension(mm): 650x108
LED: E27 HOLDER
Material: Aluminium+pc
Body color: Black
CRI: T
IP: IP44

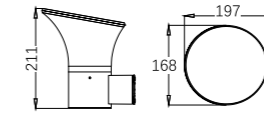


LWL-036

Watt: 18w
Dimension(mm): 211x168x197
LED: E27 HOLDER
Material: Aluminium+pc
Body color: Black
CRI: T
IP: IP44

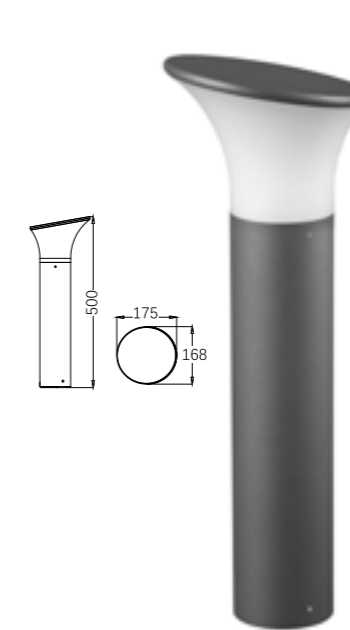


LB-016

Watt: 23w
Dimension(mm): 500x168x175
LED: E27 HOLDER
Material: Aluminium+pc
Body color: Black
CRI: T
IP: IP44




LB-015

Watt: 23w
Dimension(mm): 300x168x175
LED: E27 HOLDER
Material: Aluminium+pc
Body color: Black
CRI: T
IP: IP44

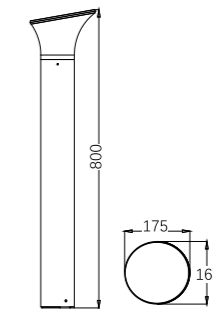


LB-017

Watt: 23w
Dimension(mm): 800x168x175
LED: E27 HOLDER
Material: Aluminium+pc
Body color: Black
CRI: T
IP: IP44

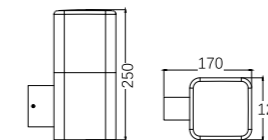

LWL-007

Watt: 23w
Dimension(mm): 250x120x170
LED: E27 HOLDER
Material: Aluminium+pc
Body color: Black
CRI: T
IP: IP44




LB-018

Watt: 23w
Dimension(mm): 300x120x120
LED: E27 HOLDER
Material: Aluminium+pc
Body color: Black
CRI: T
IP: IP44




LB-019

Watt: 23w
Dimension(mm): 500x120x120
LED: E27 HOLDER
Material: Aluminium+pc
Body color: Black
CRI: T
IP: IP44

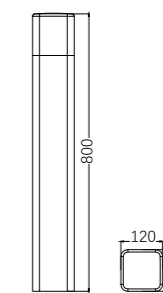


LB-020

Watt: 23w
Dimension(mm): 800x120x120
LED: E27 HOLDER
Material: Aluminium+pc
Body color: Black
CRI: T
IP: IP44

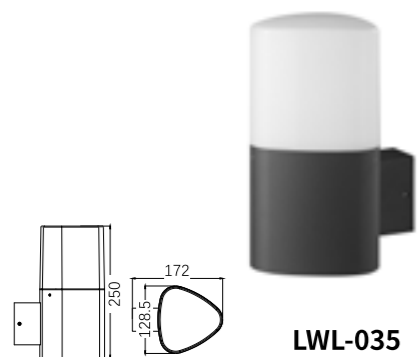


LWL-035

Watt: 23w
Dimension(mm): 250x128.5x172
LED: E27 HOLDER
Material: Aluminium+pc
Body color: Black
CRI: T
IP: IP44

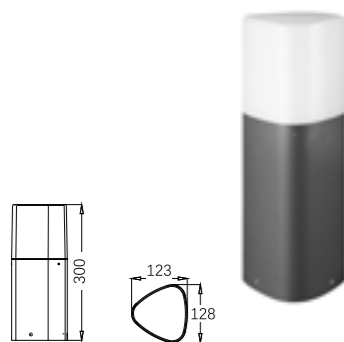


LB-026

Watt: 23w
Dimension(mm): 300x128x123
LED: E27 HOLDER
Material: Aluminium+pc
Body color: Black
CRI: T
IP: IP44

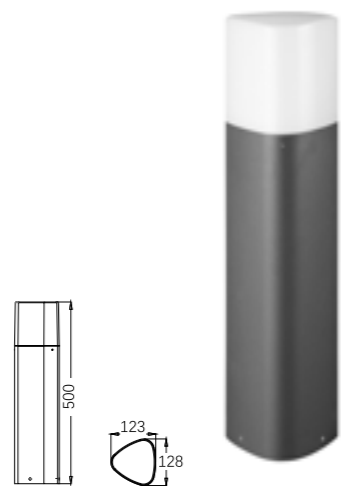

LB-027

Watt: 23w
Dimension(mm): 500x128x123
LED: E27 HOLDER
Material: Aluminium+pc
Body color: Black
CRI: T
IP: IP44

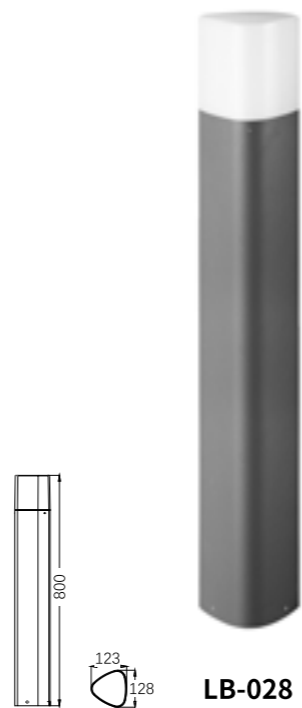


LB-028

Watt: 23w
Dimension(mm): 800x128x123
LED: E27 HOLDER
Material: Aluminium+pc
Body color: Black
CRI: T
IP: IP44




LWL-037

Watt: 23w
Dimension(mm): 250x106.4x72.6
LED: E27 HOLDER
Material: Aluminium+pc
Body color: Black
CRI: T
IP: IP44




LB-023

Watt: 23w
Dimension(mm): 300x101.8x104.1
LED: E27 HOLDER
Material: Aluminium+pc
Body color: Black
CRI: T
IP: IP44

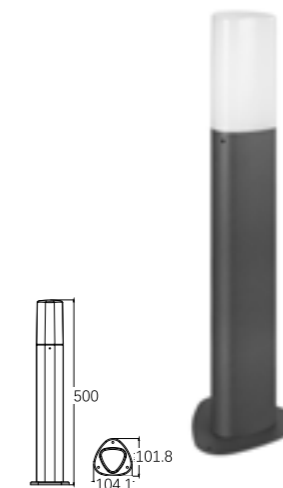


LB-024

Watt: 23w
Dimension(mm): 500x101.8x104.1
LED: E27 HOLDER
Material: Aluminium+pc
Body color: Black
CRI: T
IP: IP44

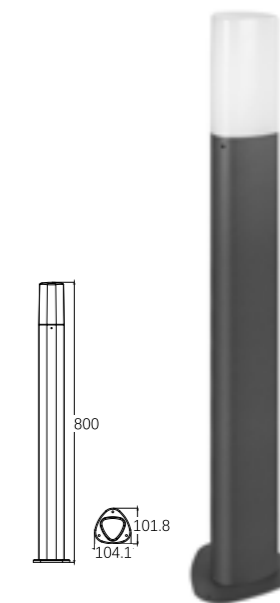


LB-025

Watt: 18w
Dimension(mm): 800x101.8x104.1
LED: E27 HOLDER
Material: Aluminium+pc
Body color: Black
CRI: T
IP: IP44

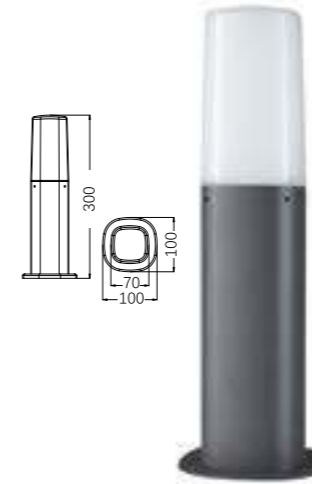


LB-029

Watt: 23w
Dimension(mm): 300x100x100
LED: E27 HOLDER
Material: Aluminium+pc
Body color: Black
CRI: T
IP: IP44

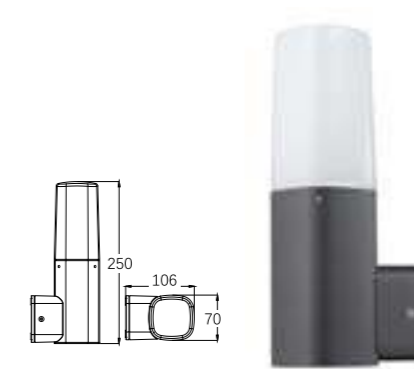


LWL-008

Watt: 23w
Dimension(mm): 250x106x70
LED: E27 HOLDER
Material: Aluminium+pc
Body color: Black
CRI: T
IP: IP44

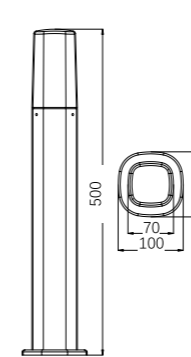

LB-029A

Watt: 23w
Dimension(mm): 500x100x100
LED: E27 HOLDER
Material: Aluminium+pc
Body color: Black
CRI: T
IP: IP44

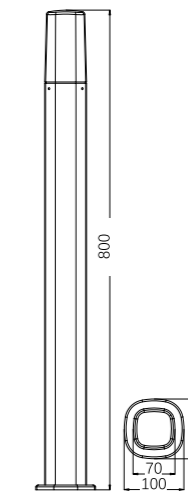

LB-029B

Watt: 23w
Dimension(mm): 800x100x100
LED: E27 HOLDER
Material: Aluminium+pc
Body color: Black
CRI: T
IP: IP44

100-240V
50-60Hz




LB-103

Watt: 20w
Dimension(mm): 143x650
LED: E27 HOLDER
Material: Die-cast Aluminium
Body color: Black
CRI: T
IP: IP54




LB-104

Watt: 20w
Dimension(mm): 900x143
LED: E27 HOLDER
Material: Die-cast Aluminium
Body color: Black
CRI: T
IP: IP54

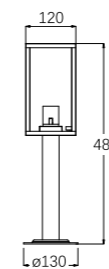


LB-110

Watt: 40w
Dimension(mm): 120x130x480
LED Hoilder: E27 HOLDER
Material: Die-cast Aluminium
Body color: Black
CRI: T
IP: IP54



LWL-038

Watt: 40w
Dimension(mm): 120x120x220
LED Hoilder: E27 HOLDER
Material: Die-cast Aluminium
Body color: Black
CRI: T
IP: IP44




LWL-040

Watt: 40w
Dimension(mm): 120x188x382
LED Hoilder: E27 HOLDER
Material: Die-cast Aluminium
Body color: Black
CRI: T
IP: IP44

200-240V
50-60Hz




100-240V
50-60Hz




LWL-052

Dimension(mm): 276x145x215
LED: E27 HOLDER
Material: Die-cast Aluminium
Body color: Black
CRI: T
IP: IP65




LB-116

Dimension(mm): 145x145x220
LED: E27 HOLDER
Material: Die-cast Aluminium
Body color: Black
CRI: T
IP: IP65




LB-113

Dimension(mm): 220x160x215
LED: E27 HOLDER
Material: Die-cast Aluminium
Body color: Black
CRI: T
IP: IP65




LWL-051

Dimension(mm): 276x160x215
LED: E27 HOLDER
Material: Die-cast Aluminium
Body color: Black
CRI: T
IP: IP65




LB-117

Dimension(mm): 145x145x350
LED: E27 HOLDER
Material: Die-cast Aluminium
Body color: Black
CRI: T
IP: IP65

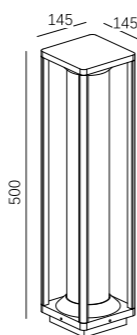


LB-118

Dimension(mm): 145x145x500
LED: E27 HOLDER
Material: Die-cast Aluminium
Body color: Black
CRI: T
IP: IP65




LB-114

Dimension(mm): 350x160
LED: E27 HOLDER
Material: Die-cast Aluminium
Body color: Black
CRI: T
IP: IP65

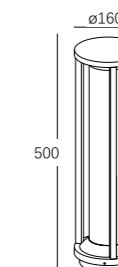


LB-115

Dimension(mm): 500x160
LED: E27 HOLDER
Material: Die-cast Aluminium
Body color: Black
CRI: T
IP: IP65

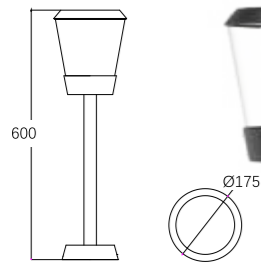

LB-132

Dimension(mm): 600*175*175
LED chip: Hoder.E27
Material: ALUMINIUM
Body color: DARK GREY
IP: IP54

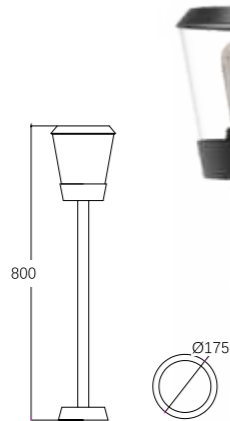

LB-133

Dimension(mm): 800*175*175
Hoder: E27
Material: ALUMINIUM
Body color: DARK GREY
IP: IP54



LB-134

Dimension(mm): 1000*175*175
Hoder: E27
Material: ALUMINIUM
Body color: DARK GREY
IP: IP54




LB-145

Dimension(mm): 317*300
Hoder: E27
Material: ALUMINIUM
Body color: DARK GREY
IP: IP65




LWL-054

Dimension(mm): 406*209*175
Hoder: E27
Material: Aluminium
Body color: DARK GREY
IP: IP54

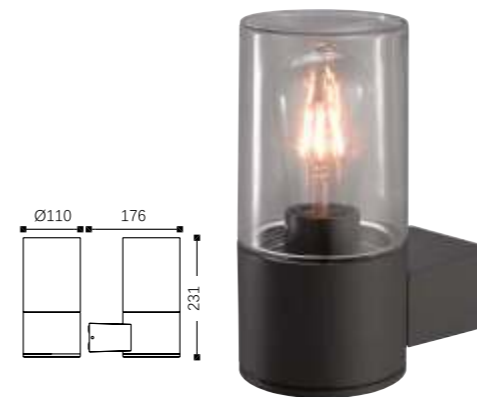


LWL-053

Dimension(mm): 110x176x231
Hoder: E27
Material: Aluminium+Glass
Body color: DARK GREY
IP: IP54



LB-130

Dimension(mm): 110x500
Hoder: E27
Material: ALUMINIUM+Glass
Body color: DARK GREY
IP: IP54



LB-131


Dimension(mm): 110x900
Hoder: E27
Material: ALUMINIUM+Glass
Body color: DARK GREY
IP: IP54




LWL-061
Dimension(mm): 135x202x260
Hoder: E27
Material: Aluminium
Body color: DARK GREY
IP: IP54




LB-142
Dimension(mm): 135x382
Hoder: E27
Material: ALUMINIUM+PC
Body color: DARK GREY
IP: IP65

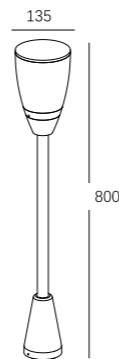


LB-143
Dimension(mm): 135x800
Hoder: E27
Material: ALUMINIUM+PC
Body color: DARK GREY
IP: IP65




LWL-012
Watt: 18w
Dimension(mm): 103x250x110
LED: E27 HOLDER
Material: Die-cast Aluminium
Body color: Black
CRI: T
IP: IP44




LWL-009
Watt: 18w
Dimension(mm): 103x250x110
LED: E27 HOLDER
Material: Die-cast Aluminium
Body color: Black
CRI: T
IP: IP44




LWL-013
Watt: 18w
Dimension(mm): 180x290x87
LED: E27 HOLDER
Material: Die-cast Aluminium
Body color: Black
CRI: T
IP: IP44

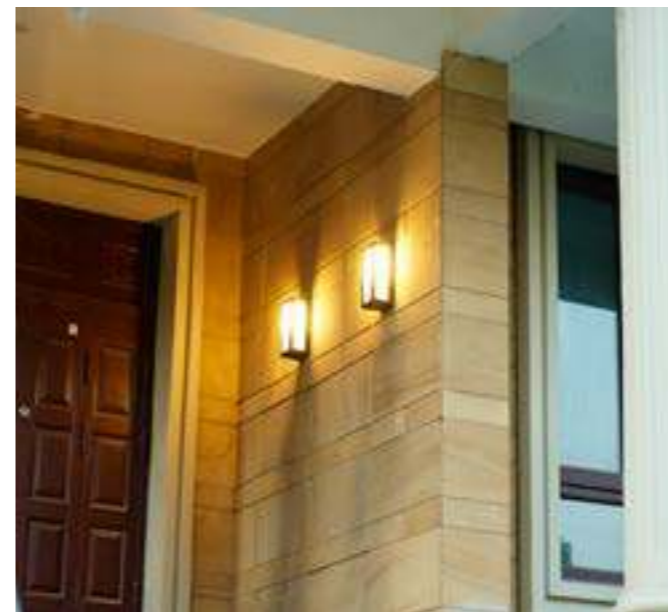




LWL-029

Watt: 18w
Dimension(mm): 350x120x120
LED: E27 HOLDER
Material: Die-cast Aluminium
Body color: Black
CRI: T
IP: IP54



LWL-014

Watt: 18w
Dimension(mm): 260x137x72
LED: E27 HOLDER
Material: Die-cast Aluminium
Body color: Black
CRI: T
IP: IP44




LWL-015

Watt: 18w
Dimension(mm): 250x116x126
LED: E27 HOLDER
Material: Die-cast Aluminium
Body color: Black
CRI: T
IP: IP44




LWL-016

Watt: 18w
Dimension(mm): 290x113x129
LED: E27 HOLDER
Material: Die-cast Aluminium
Body color: Black
CRI: T
IP: IP44




LWL-028

Watt: 18w
Dimension(mm): 280x94
LED: E27 HOLDER
Material: Die-cast Aluminium
Body color: Black
CRI: T
IP: IP44




LWL-017

Watt: 18w
Dimension(mm): 300x300x100
LED: E27 HOLDER
Material: Die-cast Aluminium
Body color: Black
CRI: T
IP: IP54




LWL-020

Watt: 18w
Dimension(mm): 280x95x185
LED: E27 HOLDER
Material: Die-cast Aluminium
Body color: Black
CRI: T
IP: IP44

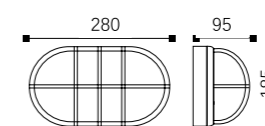


LWL-030

Watt: 18w
Dimension(mm): 345x102x108
LED: E27 HOLDER
Material: Die-cast Aluminium
Body color: Black
CRI: T
IP: IP54




100-240V
50-60Hz




LWL-042

Dimension(mm): 256x86x88
LED: E27 HOLDER
Material: Aluminium+glass
Body color: Black
CRI: T
IP: IP54




LWL-043

Dimension(mm): 265x95x90
LED: E27 HOLDER
Material: Aluminium+glass
Body color: Black
CRI: T
IP: IP54




LWL-049

Dimension(mm): 155x120x90
LED: GU10
Material: Aluminium+glass
Body color: Black
CRI: T
IP: IP54



LWL-044

Dimension(mm): 256x86x88
LED: E27 HOLDER
Material: Aluminium+glass
Body color: Black
CRI: T
IP: IP54





LWL-041

Dimension(mm): 220x220x82
LED: E27 HOLDER
Material: Aluminium+glass
Body color: Black
CRI: T
IP: IP54



LWL-047


Dimension(mm): 108x120x90
LED: GU10
Material: Aluminium+glass
Body color: Black
CRI: T
IP: IP54



LWL-045


Dimension(mm): 108x90
LED: GU10
Material: Aluminium+glass
Body color: Black
CRI: T
IP: IP54

100-240V
50-60Hz




LWL-050

Dimension(mm): 155x115x85
 LED: GU10
 Material: Aluminium+glass
 Body color: Black
 CRI: T
 IP: IP54



LWL-048


Dimension(mm): 108x115x85
 LED: GU10
 Material: Aluminium+glass
 Body color: Black
 CRI: T
 IP: IP54



LWL-046

Dimension(mm): 108x85x85
 LED: GU10
 Material: Aluminium+glass
 Body color: Black
 CRI: T
 IP: IP54

100-240V
50-60Hz

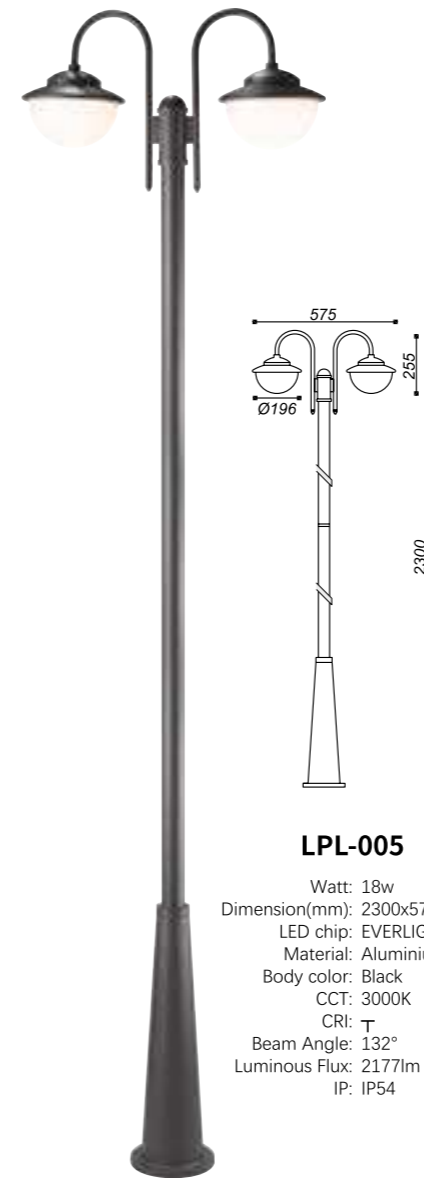


LPL-005

Watt: 18w
Dimension(mm): 2300x575
LED chip: EVERLIGHT
Material: Aluminium+pc
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 132°
Luminous Flux: 2177lm
IP: IP54




LLO-072

Watt: 9w
Dimension(mm): 335x280x196
LED chip: EVERLIGHT
Material: Aluminium+pc
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 132°
Luminous Flux: 1088lm
IP: IP54

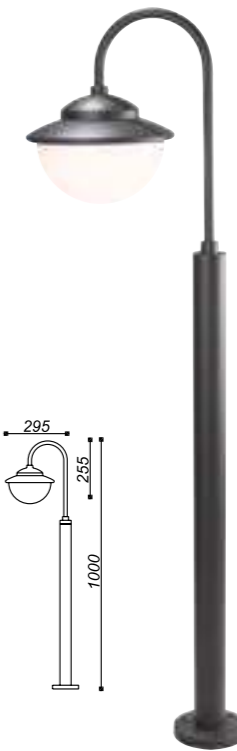


LPL-004


Watt: 9w
Dimension(mm): 1000x295
LED chip: EVERLIGHT
Material: Aluminium+pc
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 132°
Luminous Flux: 1088lm
IP: IP54

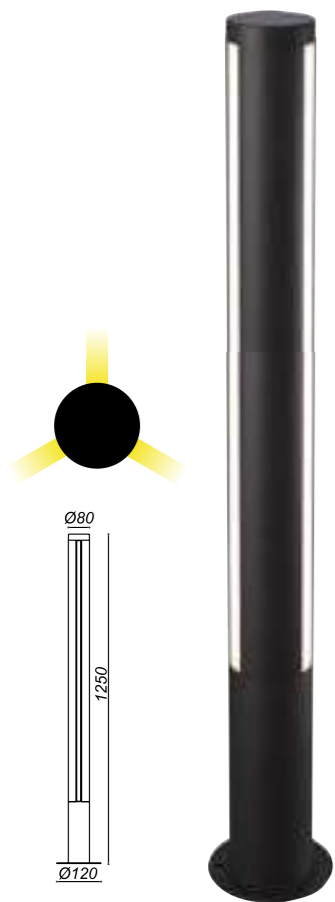

LPL-006
 Watt: 18w
 Dimension(mm): 1250x120x80
 LED chip: EVERLIGHT
 Material: Aluminium+pc
 Body color: Black
 CCT: 3000K
 CRI: T
 Beam Angle: 354°
 Luminous Flux: 1070lm
 IP: IP54

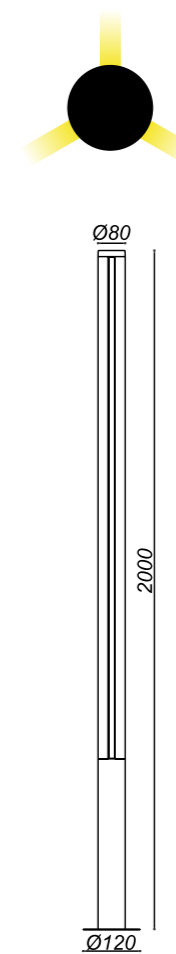

LPL-007
 Watt: 27w
 Dimension(mm): 2000x120x80
 LED chip: EVERLIGHT
 Material: Aluminium+pc
 Body color: Black
 CCT: 3000K
 CRI: T
 Beam Angle: 354°
 Luminous Flux: 1600lm
 IP: IP54

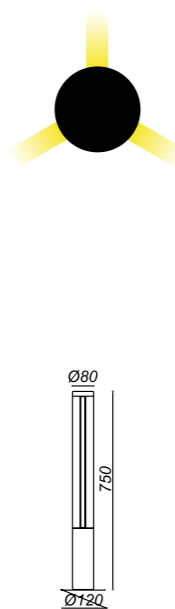

LPL-008
 Watt: 9w
 Dimension(mm): 750x120x80
 LED chip: EVERLIGHT
 Material: Aluminium+pc
 Body color: Black
 CCT: 3000K
 CRI: T
 Beam Angle: 354°
 Luminous Flux: 535lm
 IP: IP54




EVERLIGHT

100-240V
50-60Hz



100-240V
50-60Hz

EVERLIGHT

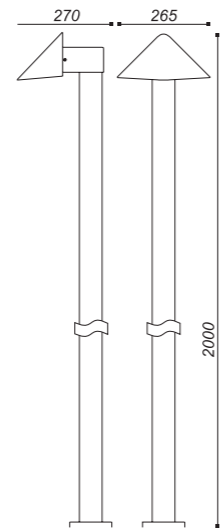

LPL-009

Watt: 15w
 Dimension(mm): 2000x265x270
 LED chip: CREE
 Material: Aluminium+glass
 Body color: Black
 CCT: 3000K
 CRI: T
 Beam Angle: 132°
 Luminous Flux: 700lm-800lm
 IP: IP54

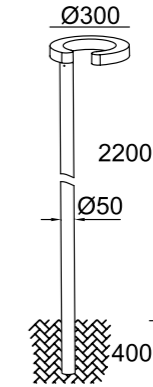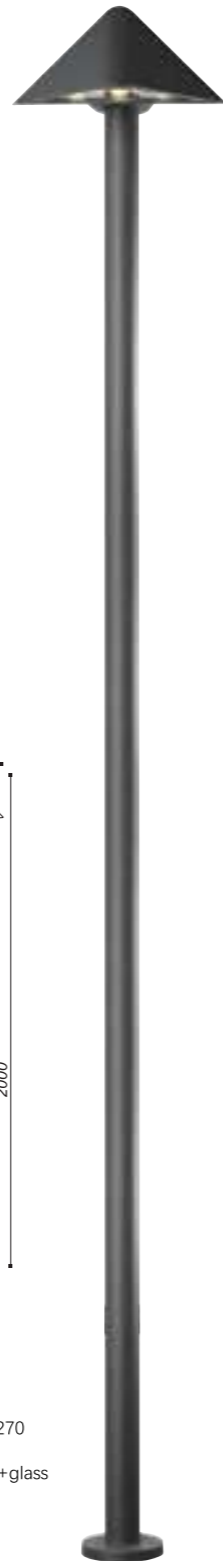

LPL-010

Watt: 24w
 Dimension(mm): 2200x300
 LED chip: CREE
 Material: Die-cast Aluminium
 Body color: Black
 CCT: 3000K
 CRI: T
 Beam Angle: 54°
 Luminous Flux: 879lm
 IP: IP54





LPL-011

Watt: 36W
Dimension(mm): 145x1200
LED chip: SMD-EVERLIGHT
Material: ALUMINIUM+PC
Body color: DARK GREY
CCT: 3000K
CRI: >80
Beam Angle: 360°
Luminous Flux: 2300LM
IP: IP54




LPL-012

Watt: 36W
Dimension(mm): 145x1700
LED chip: SMD-EVERLIGHT
Material: ALUMINIUM+PC
Body color: DARK GREY
CCT: 3000K
CRI: >80
Beam Angle: 360°
Luminous Flux: 2300LM
IP: IP54




LB-129

Watt: 18W
Dimension(mm): 240x260
LED chip: SMD-EVERLIGHT
Material: ALUMINIUM+PC
Body color: DARK GREY
CCT: 3000K
CRI: >80
Beam Angle: 360°
Luminous Flux: 1118LM
IP: IP54




LPL-013

Watt: 18W
Dimension(mm): 240x2200
LED chip: SMD-EVERLIGHT
Material: ALUMINIUM+PC
Body color: DARK GREY
CCT: 3000K
CRI: >80
Beam Angle: 360°
Luminous Flux: 1118LM
IP: IP54

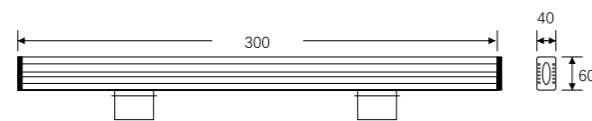


LLWW-001A

Watt: 6w
Dimension(mm): 40x60x300
LED chip: EPILEDs
Material: Aluminium+pc
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 40° 10°
IP: IP65

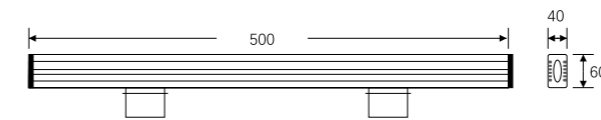


LLWW-001

Watt: 18w
Dimension(mm): 40x60x500
LED chip: Bridgelux
Material: Aluminium+pc
Body color: Black
CCT: 3000/4000/2200K
CRI: T
Beam Angle: 40° 10°
IP: IP65

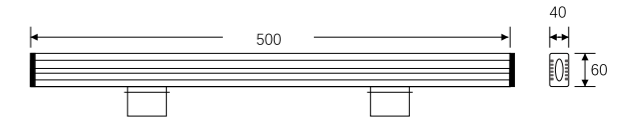


LLWW-002

Watt: 18w
Dimension(mm): 40x60x500
LED chip: EPILEDs
Material: Aluminium+pc
Body color: Black
CCT: BLUE/GREEN
CRI: T
Beam Angle: 40°
IP: IP65

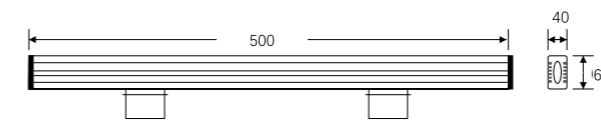


LLWW-003

Watt: 18w
Dimension(mm): 40x60x500
LED chip: EPILEDs
Material: Aluminium+pc
Body color: Black
CCT: RGB
CRI: T
Beam Angle: 40°
IP: IP65

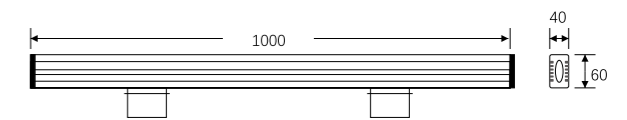


LLWW-004

Watt: 36w
Dimension(mm): 40x60x1000
LED chip: Bridgelux
Material: Aluminium+pc
Body color: Black
CCT: 3000/4000/2200K
CRI: T
Beam Angle: 40° 10°
IP: IP65

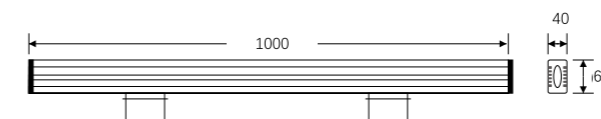

LLWW-005

Watt: 36w
Dimension(mm): 40x60x1000
LED chip: EPILEDs
Material: Aluminium+pc
Body color: Black
CCT: BLUE/GREEN
CRI: T
Beam Angle: 40°
IP: IP65

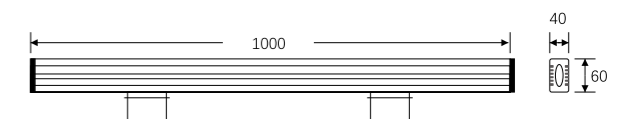


LLWW-006

Watt: 36w
Dimension(mm): 40x60x1000
LED chip: EPILEDs
Material: Aluminium+pc
Body color: Black
CCT: RGB
CRI: T
Beam Angle: 40°
IP: IP65




LLWW-010

Watt: 18w
Dimension(mm): 120x120x80
LED chip: CREE
Material: Aluminium+pc
Body color: Black
CCT: 2200/3000K
CRI: T
Beam Angle: 5° /25°
Luminous Flux: 120lm/w
IP: IP65




LLWW-011

Watt: 18w
Dimension(mm): 120x120x80
LED chip: EPILEDs
Material: Aluminium+pc
Body color: Black
CCT: RGB
CRI: T
Beam Angle: 5° /25°
Luminous Flux: 120lm/w
IP: IP65





LLWW-013

Watt: 25w
Dimension(mm): 120x120x80
LED chip: EPILEDs
Material: Aluminium+pc
Body color: Black
CCT: RGB
CRI: T
Beam Angle: 5° /25°
Luminous Flux: 120lm/w
IP: IP65




LLWW-012

Watt: 25w
Dimension(mm): 120x120x80
LED chip: CREE
Material: Aluminium+pc
Body color: Black
CCT: 2200/3000K
CRI: T
Beam Angle: 5° /25°
Luminous Flux: 120lm/w
IP: IP65

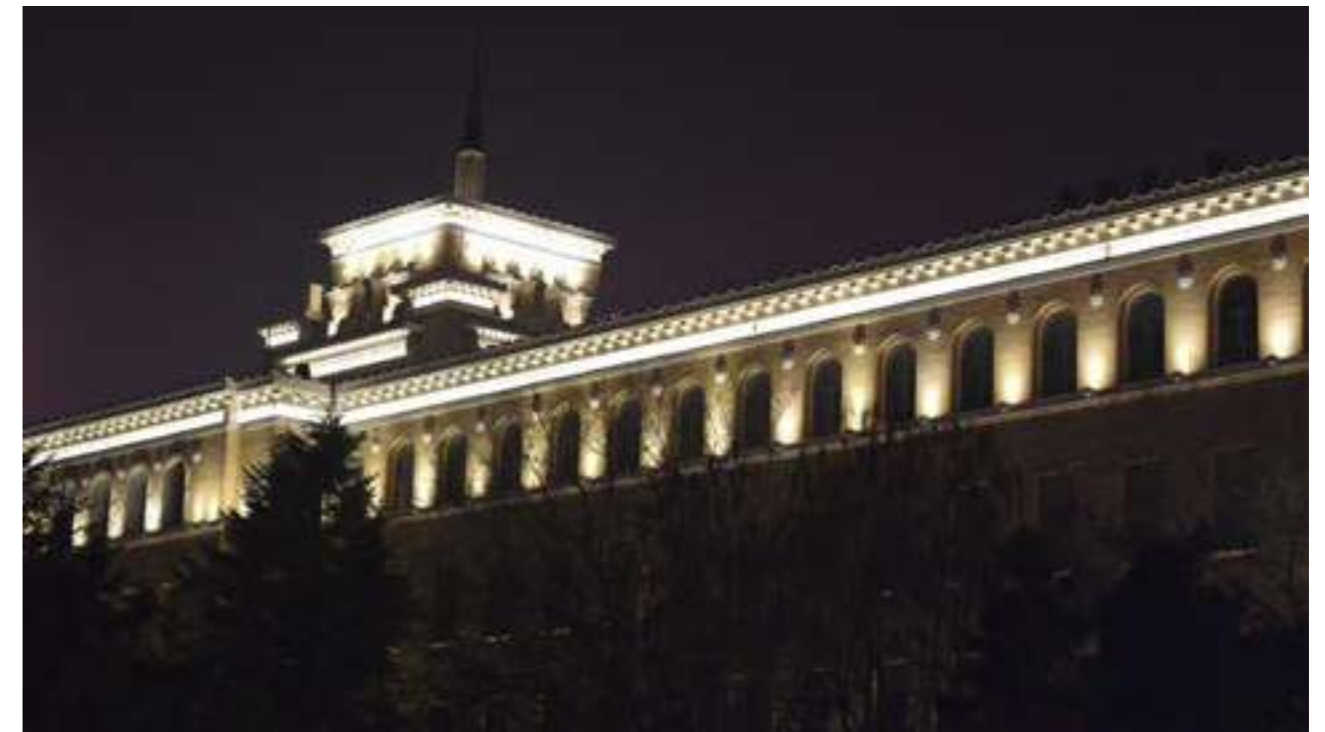


LLWW-007


Watt: 8w
Dimension(mm): 140x145x105
LED chip: CREE
Material: Die-cast Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 5°
Luminous Flux: 147lm/w
IP: IP65



LLWW-008


Watt: 20w
Dimension(mm): 165x165x105
LED chip: CREE
Material: Die-cast Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 5°
Luminous Flux: 149lm/w
IP: IP65



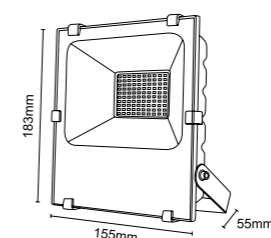


LFL-002

Watt: 20w
Dimension(mm): 183x155x55
LED chip: Sanan 2835
Material: Die-cast Aluminium+glass
Body color: Black
CCT: 3000/6000K/RED/BLUE/GREEN
CRI: T
Beam Angle: 110°
Luminous Flux: 100lm/w
IP: IP65

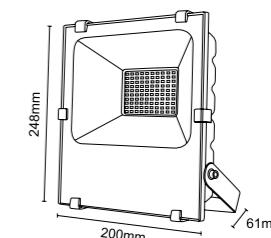


LFL-004A

Watt: 50w
Dimension(mm): 248x200x61
LED chip: Sanan 2835
Material: Die-cast Aluminium+glass
Body color: Black
CCT: RGB
CRI: T
Beam Angle: 110°
Luminous Flux: 100lm/w
IP: IP65

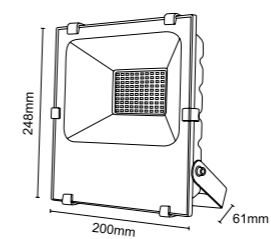


LFL-004

Watt: 50w
Dimension(mm): 248x200x61
LED chip: Sanan 2835
Material: Die-cast Aluminium+glass
Body color: Black
CCT: 3000/6000K/RED/BLUE/GREEN
CRI: T
Beam Angle: 110°
Luminous Flux: 100lm/w
IP: IP65

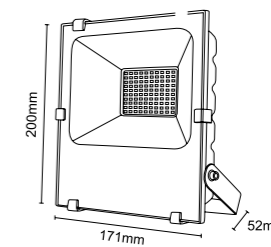


LFL-003

Watt: 30w
Dimension(mm): 200x171x52
LED chip: Sanan 2835
Material: Die-cast Aluminium+glass
Body color: Black
CCT: 3000/6000K
CRI: T
Beam Angle: 110°
Luminous Flux: 100lm/w
IP: IP65




LFL-001

Watt: 10w
Dimension(mm): 110x130x38
LED chip: Sanan 2835
Material: Die-cast Aluminium+glass
Body color: Black
CCT: 3000/6000K/RED/BLUE/GREEN
CRI: T
Beam Angle: 110°
Luminous Flux: 100lm/w
IP: IP65




LFL-001A

Watt: 10w
Dimension(mm): 110x130x38
LED chip: Sanan 2835
Material: Die-cast Aluminium+glass
Body color: Black
CCT: RGB
CRI: T
Beam Angle: 110°
Luminous Flux: 100lm/w
IP: IP65




LFL-002A

Watt: 30w
Dimension(mm): 200x171x52
LED chip: Sanan 2835
Material: Die-cast Aluminium+glass
Body color: Black
CCT: RGB
CRI: T
Beam Angle: 110°
Luminous Flux: 100lm/w
IP: IP65

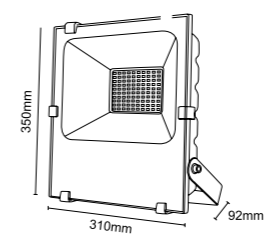

LFL-006

Watt: 200w
Dimension(mm): 350x310x92
LED chip: Sanan 2835
Material: Die-cast Aluminium+glass
Body color: Black
CCT: 3000/6000K
CRI: T
Beam Angle: 110°
Luminous Flux: 100lm/w
IP: IP65

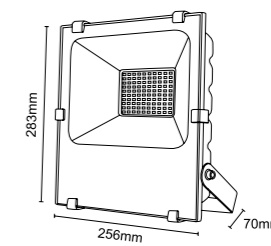

LFL-005


Watt: 100w
Dimension(mm): 283x256x70
LED chip: Sanan 2835
Material: Die-cast Aluminium+glass
Body color: Black
CCT: 3000/6000K
CRI: T
Beam Angle: 110°
Luminous Flux: 100lm/w
IP: IP65






LFL-012

Watt: 20w
Dimension(mm): 178x45x183
LED chip: SANAN 5730
Material: Die-cast Aluminium+glass
Body color: Black
CCT: 3000/6000K
CRI: T
Beam Angle: 110°
Luminous Flux: 100lm/w
IP: IP65

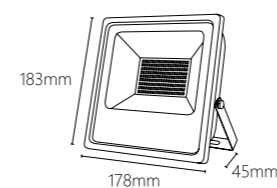


LFL-013

Watt: 30w
Dimension(mm): 185x155x42
LED chip: SANAN 5730
Material: Die-cast Aluminium+glass
Body color: Black
CCT: 3000/6000K
CRI: T
Beam Angle: 110°
Luminous Flux: 100lm/w
IP: IP65

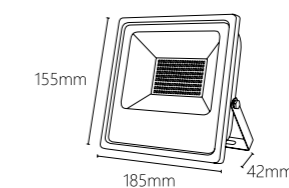


LFL-014

Watt: 50w
Dimension(mm): 230x195x43
LED chip: SANAN 5730
Material: Die-cast Aluminium+glass
Body color: Black
CCT: 3000/6000K
CRI: T
Beam Angle: 110°
Luminous Flux: 100lm/w
IP: IP65

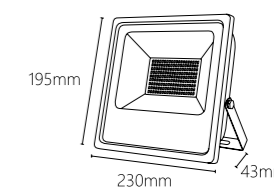


LFL-015

Watt: 100w
Dimension(mm): 289x289x68
LED chip: SANAN 5730
Material: Die-cast Aluminium+glass
Body color: Black
CCT: 3000/6000K
CRI: T
Beam Angle: 110°
Luminous Flux: 100lm/w
IP: IP65

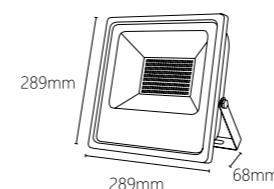


LFL-016

Watt: 200w
Dimension(mm): 380x115x373
LED chip: SANAN 5730
Material: Die-cast Aluminium+glass
Body color: Black
CCT: 3000/6000K
CRI: T
Beam Angle: 110°
Luminous Flux: 100lm/w
IP: IP65

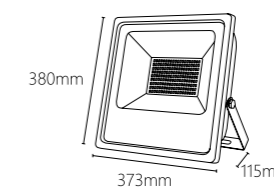


LFL-016A


Watt: 400w
Dimension(mm): 598x475x83
LED chip: SANAN 5730
Material: Die-cast Aluminium+glass
Body color: Black
CCT: 3000/6000K
CRI: T
Beam Angle: 110°
Luminous Flux: 100lm/w
IP: IP65

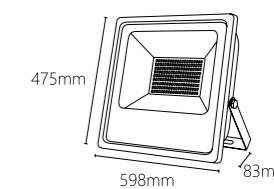

LFL-011


Watt: 10w
Dimension(mm): 125x120x39
LED chip: SANAN 5730
Material: Die-cast Aluminium+glass
Body color: Black
CCT: 3000/6000K
CRI: T
Beam Angle: 110°
Luminous Flux: 100lm/w
IP: IP65

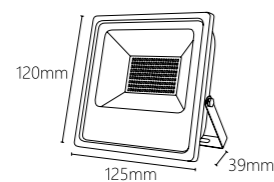

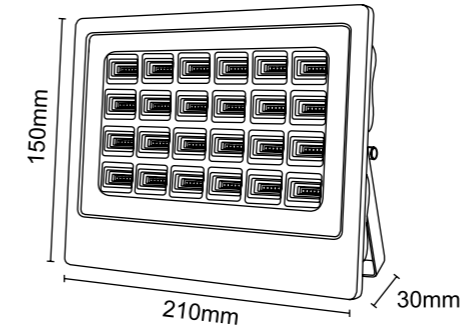


LFL-017

Watt: 30w
 Dimension(mm): 210x150x30
 LED chip: Sanan 2835
 Material: Die-cast Aluminium+glass
 Body color: White
 CCT: 3000/6000K
 CRI: T
 Beam Angle: 110°
 Luminous Flux: 100lm/w
 IP: IP65

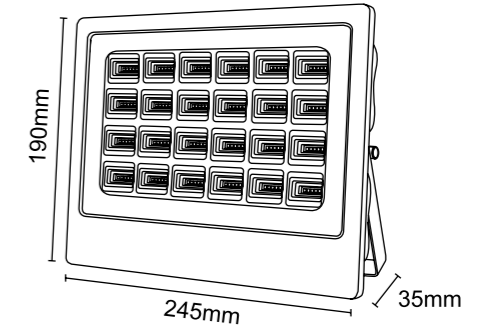


LFL-018

Watt: 50w
 Dimension(mm): 245x190x35
 LED chip: Sanan 2835
 Material: Die-cast Aluminium+glass
 Body color: White
 CCT: 3000/6000K
 CRI: T
 Beam Angle: 110°
 Luminous Flux: 100lm/w
 IP: IP65

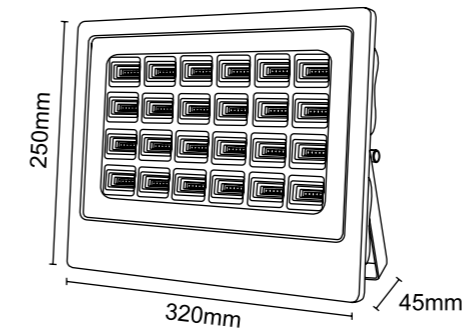

LFL-019

Watt: 100w
 Dimension(mm): 320x250x45
 LED chip: Sanan 2835
 Material: Die-cast Aluminium+glass
 Body color: White
 CCT: 3000/6000K
 CRI: T
 Beam Angle: 110°
 Luminous Flux: 100lm/w
 IP: IP65

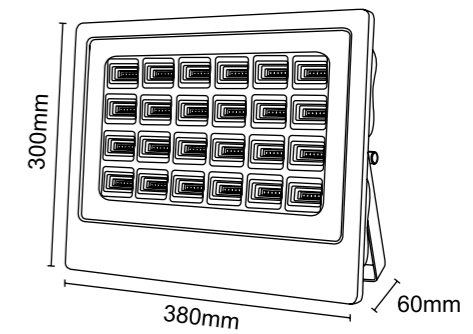


LFL-020

Watt: 150w
 Dimension(mm): 380x300x60
 LED chip: Sanan 2835
 Material: Die-cast Aluminium+glass
 Body color: White
 CCT: 3000/6000K
 CRI: T
 Beam Angle: 110°
 Luminous Flux: 100lm/w
 IP: IP65



LFL-017-020



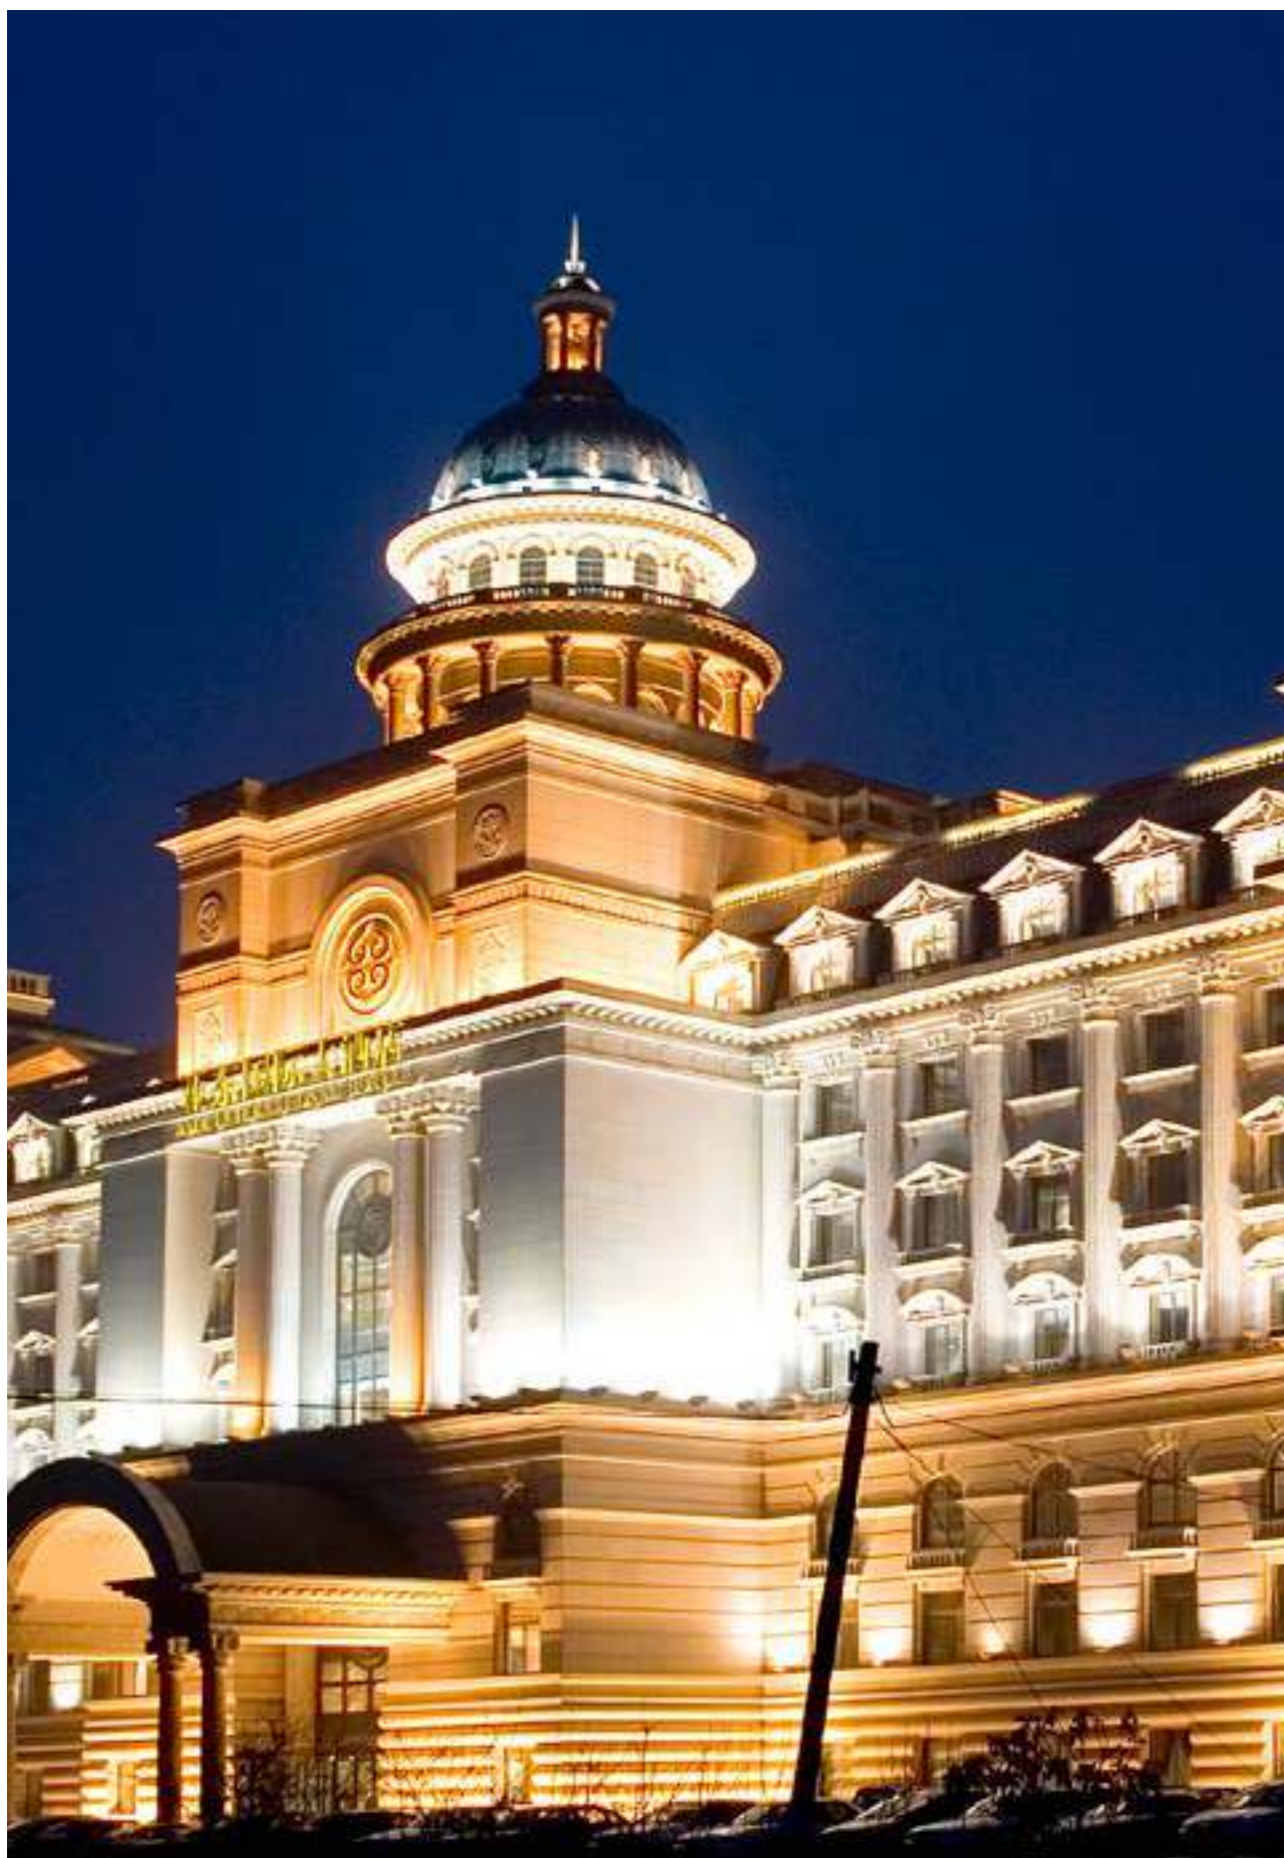

LFL-021

Watt: 20w
Dimension(mm): 180x140x38
LED chip: EPISTAR/LG 5054
Material: Die-cast Aluminium+glass
Body color: White
CCT: 3000/6000K
CRI: T
Beam Angle: 110°
Luminous Flux: 100-120lm/w
IP: IP65



LFL-022

Watt: 30w
Dimension(mm): 225x183x42
LED chip: EPISTAR/LG 5054
Material: Die-cast Aluminium+glass
Body color: White
CCT: 3000/6000K
CRI: T
Beam Angle: 110°
Luminous Flux: 100-120lm/w
IP: IP65



LFL-023

Watt: 50w
Dimension(mm): 230x225x45
LED chip: EPISTAR/LG 5054
Material: Die-cast Aluminium+glass
Body color: White
CCT: 3000/6000K
CRI: T
Beam Angle: 110°
Luminous Flux: 100-120lm/w
IP: IP65



LFL-024

Watt: 100w
Dimension(mm): 283x333x45
LED chip: EPISTAR/LG 5054
Material: Die-cast Aluminium+glass
Body color: White
CCT: 3000/6000K
CRI: T
Beam Angle: 110°
Luminous Flux: 100-120lm/w
IP: IP65



LFL-025

Watt: 100w
Dimension(mm): 283x333x45
LED chip: EPISTAR/LG 5054
Material: Die-cast Aluminium+glass
Body color: White
CCT: 3000/6000K
CRI: T
Beam Angle: 110°
Luminous Flux: 100-120lm/w
IP: IP65



LFL-026

Watt: 200w
Dimension(mm): 525x315x80
LED chip: EPISTAR/LG 5054
Material: Die-cast Aluminium+glass
Body color: White
CCT: 3000/6000K
CRI: T
Beam Angle: 110°
Luminous Flux: 100-120lm/w
IP: IP65


85-265V
50-60Hz

EPISTAR
85-265V
50-60Hz




LFL-027



Watt: 30w
Dimension(mm): 165x95x53
LED chip: EPISTAR SMD5054
Material: Die-cast Aluminium+glass
Body color: White
CCT: 6000K
CRI: T
Beam Angle: 60°
Luminous Flux: 100-120lm/w
IP: IP65

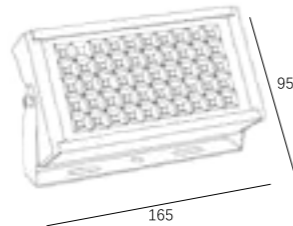

LFL-028


Watt: 50w
Dimension(mm): 213x112x53
LED chip: EPISTAR SMD5054
Material: Die-cast Aluminium+glass
Body color: White
CCT: 6000K
CRI: T
Beam Angle: 60°
Luminous Flux: 100-120lm/w
IP: IP65

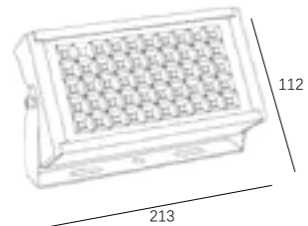

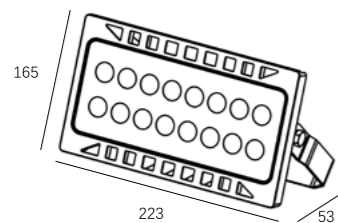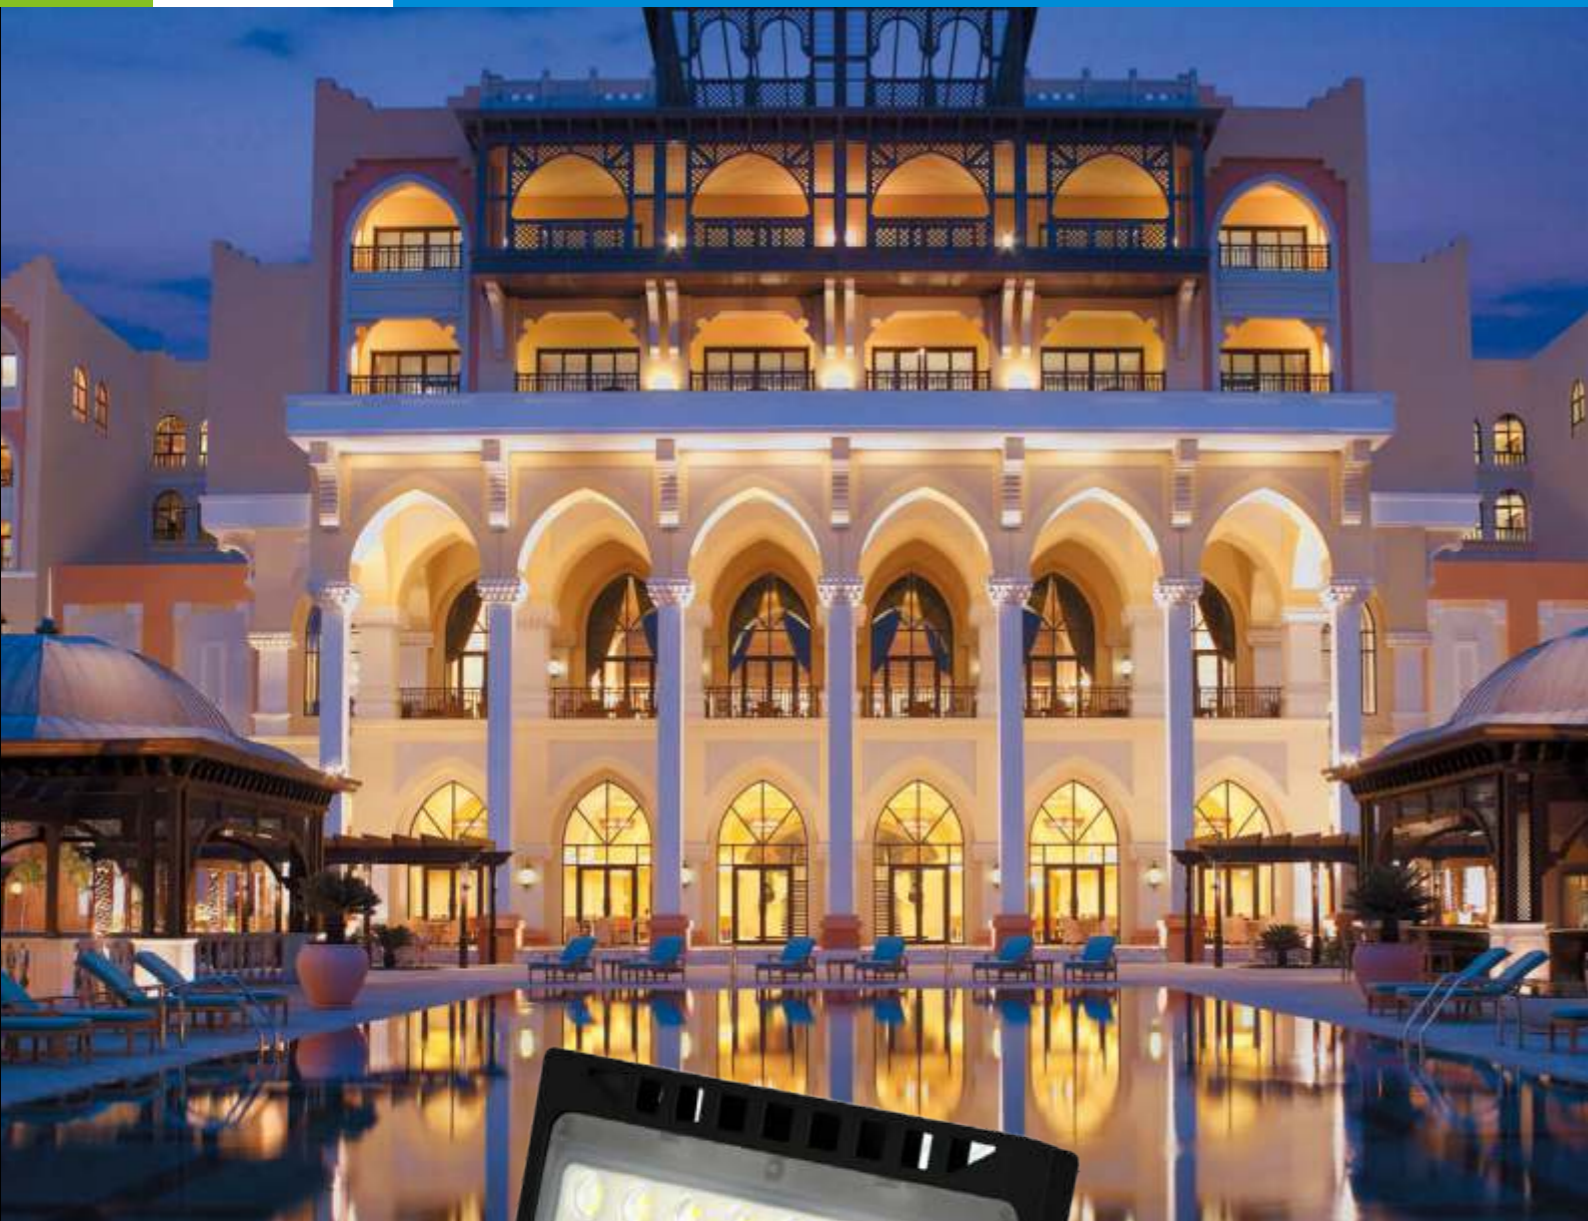


LFL-029

Watt: 50W
Dimension(mm): 223x165x53
LED chip: EPISTAR
Material: Aluminium+PC
Body color: Black
CCT: 3000K/6000K
CRI: > 90
Beam Angle: 120°
Luminous Flux: 4500LM
IP: IP65





LFL-030

Watt: 30W
Dimension(mm): 180x157x53
LED chip: EPISTAR
Material: Aluminium+PC
Body color: Black
CCT: 3000K/6000K
CRI: > 90
Beam Angle: 120°
Luminous Flux: 2700LM
IP: IP65




LFL-031

Watt: 50W
Dimension(mm): 210x182x53
LED chip: EPISTAR
Material: Aluminium+PC
Body color: Black
CCT: 3000K/6000K
CRI: > 90
Beam Angle: 120°
Luminous Flux: 4500LM
IP: IP65

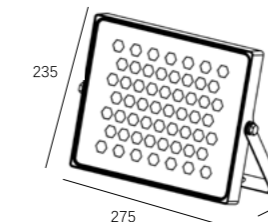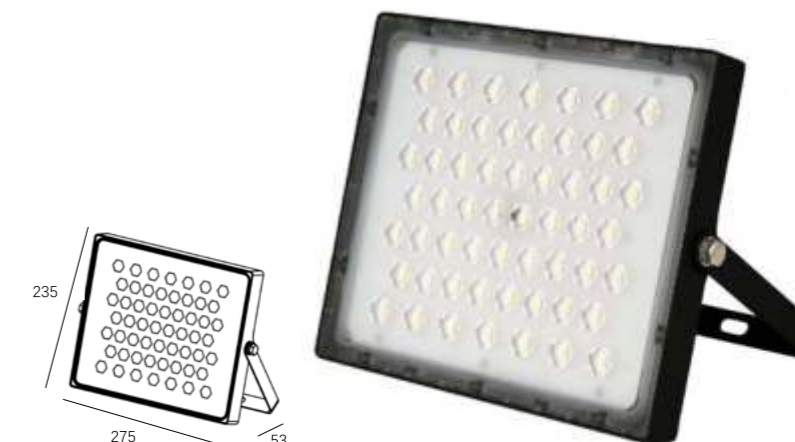


LFL-032

Watt: 100W
Dimension(mm): 275x235x53
LED chip: EPISTAR
Material: Aluminium+PC
Body color: Black
CCT: 3000K/6000K
CRI: > 90
Beam Angle: 120°
Luminous Flux: 9000LM
IP: IP65

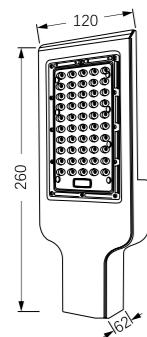


LST-001

Watt: 18w
Dimension(mm): 260x120x62
LED chip: Sanan 3030
Material: Die-cast Aluminium+pc
Body color: Black
CCT: 3000/6000K
CRI: T
Beam Angle: 110°
Luminous Flux: 100lm/w
IP: IP67

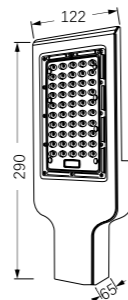


LST-002

Watt: 24w
Dimension(mm): 290x122x65
LED chip: Sanan 3030
Material: Die-cast Aluminium+pc
Body color: Black
CCT: 3000/6000K
CRI: T
Beam Angle: 110°
Luminous Flux: 100lm/w
IP: IP67

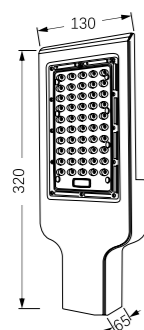


LST-003

Watt: 36w
Dimension(mm): 320x130x65
LED chip: Sanan 3030
Material: Die-cast Aluminium+pc
Body color: Black
CCT: 3000/6000K
CRI: T
Beam Angle: 110°
Luminous Flux: 100lm/w
IP: IP67

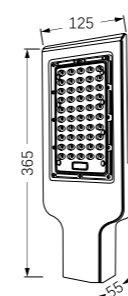

LST-004

Watt: 50w
Dimension(mm): 365x125x55
LED chip: Sanan 3030
Material: Die-cast Aluminium+pc
Body color: Black
CCT: 3000/6000K
CRI: T
Beam Angle: 110°
Luminous Flux: 100lm/w
IP: IP67

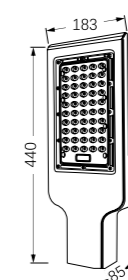

LST-005


Watt: 100w
Dimension(mm): 440x183x85
LED chip: Sanan 3030
Material: Die-cast Aluminium+pc
Body color: Black
CCT: 3000/6000K
CRI: T
Beam Angle: 110°
Luminous Flux: 100lm/w
IP: IP67



100-240V
50-60Hz


100-240V
50-60Hz






LEO-001

Watt: 6w
Dimension(mm): 63x83
LED chip: CREE
Material: Aluminium
Body color: Black
CCT: 3000/2200K
CRI: T
Beam Angle: 36°
Luminous Flux: 80lm/w
IP: IP44

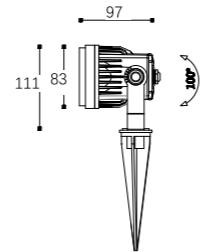


LEO-002

Watt: 12w
Dimension(mm): 83x97
LED chip: CREE
Material: Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 36°
Luminous Flux: 80lm/w
IP: IP44




LEO-020

Watt: 3w
Dimension(mm): 85x90
LED chip: Bridgelux
Material: Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 60°
Luminous Flux: 80lm/w
IP: IP54




LEO-018

Watt: 3w
Dimension(mm): 43x65
LED chip: Bridgelux
Material: Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 24°
Luminous Flux: 80lm/w
IP: IP54




LEO-019

Watt: 3w
Dimension(mm): 43x65
LED chip: Bridgelux
Material: Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 36°
Luminous Flux: 80lm/w
IP: IP54




LEO-021

Watt: 5w
Dimension(mm): 130x65
LED chip: Bridgelux
Material: Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 60°
Luminous Flux: 80lm/w
IP: IP54



LEO-022

Watt: 7w
Dimension(mm): 65x100
LED chip: Bridgelux
Material: Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 60°
Luminous Flux: 80lm/w
IP: IP54


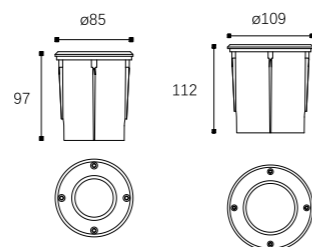


LEO-003

Watt: 6w
Dimension(mm): 97x85
Cut-Out(mm): 90
LED chip: CREE
Material: Aluminium
Body color: silver
CCT: 3000K
CRI: T
Beam Angle: 60°
Luminous Flux: 80lm/w
IP: IP44


LEO-004

Watt: 12w
Dimension(mm): 112x109
Cut-Out(mm): 105
LED chip: CREE
Material: Aluminium
Body color: silver
CCT: 3000K
CRI: T
Beam Angle: 60°
Luminous Flux: 80lm/w
IP: IP44

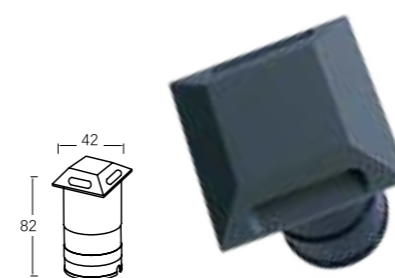


LEO-014

Watt: 3w
Dimension(mm): 42x42x82
Cut-Out(mm): 40
LED chip: EPISTAR
Material: Aluminium
Body color: silver
CCT: 3000K
CRI: T
Beam Angle: 60°
Luminous Flux: 300-310lm
IP: IP54




LEO-015

Watt: 3w
Dimension(mm): 62x85
Cut-Out(mm): 42
LED chip: EPISTAR
Material: Aluminium
Body color: silver
CCT: 3000K
CRI: T
Beam Angle: 60°
Luminous Flux: 300-310lm
IP: IP54





LEO-012

Watt: 3w
Dimension(mm): 42x82
Cut-Out(mm): 40
LED chip: EPISTAR
Material: Aluminium
Body color: silver
CCT: 3000K
CRI: T
Beam Angle: 60°
Luminous Flux: 300-310lm
IP: IP54




LEO-012A

Watt: 2w
Dimension(mm): 42x82
Cut-Out(mm): 40
LED chip: EPISTAR
Material: Aluminium
Body color: silver
CCT: 3000K
CRI: T
Beam Angle: 60°
Luminous Flux: 80lm/w
IP: IP54

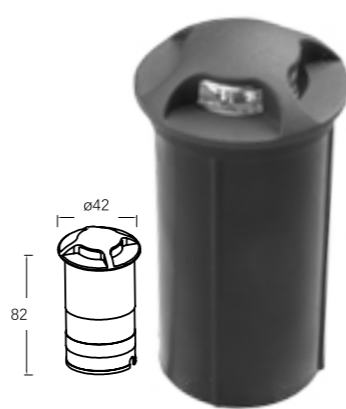



LEO-013

Watt: 3w
Dimension(mm): 42x82
Cut-Out(mm): 40
LED chip: EPISTAR
Material: Aluminium
Body color: silver
CCT: 3000K
CRI: T
Beam Angle: 60°
Luminous Flux: 300-310lm
IP: IP54



LEO-016

Watt: 3w
Dimension(mm): 42x80
Cut-Out(mm): 40
LED chip: EPISTAR
Material: Aluminium
Body color: silver
CCT: 3000K
CRI: T
Beam Angle: 60°
Luminous Flux: 300-310lm
IP: IP54

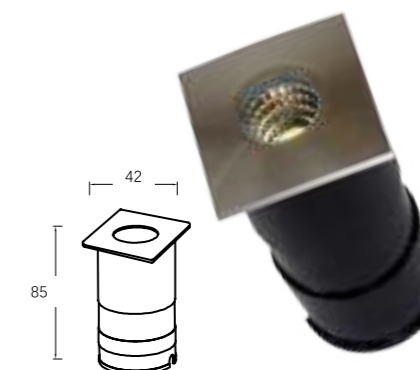


LEO-017

Watt: 3w
Dimension(mm): 42x42x85
Cut-Out(mm): 40
LED chip: EPISTAR
Material: Aluminium
Body color: silver
CCT: 3000K
CRI: T
Beam Angle: 60°
Luminous Flux: 300-310lm
IP: IP54




LEO-007

Watt: 12w
Dimension(mm): 100x100x51
LED chip: CREE
Material: Aluminium
Body color: Dark grey
CCT: 3000K
CRI: T
Beam Angle: 15°
Luminous Flux: 80lm/w
IP: IP44





LEO-006

Watt: 12w
Dimension(mm): 100x100x51
LED chip: CREE
Material: Aluminium
Body color: Dark grey
CCT: 2200/3000K
CRI: T
Beam Angle: 36°
Luminous Flux: 80lm/w
IP: IP44

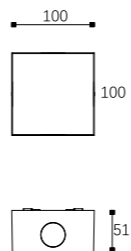


LEO-005

Watt: 6w
Dimension(mm): 173x54x60
LED chip: CREE
Material: Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 15° /36°
Luminous Flux: 80lm/w
IP: IP44

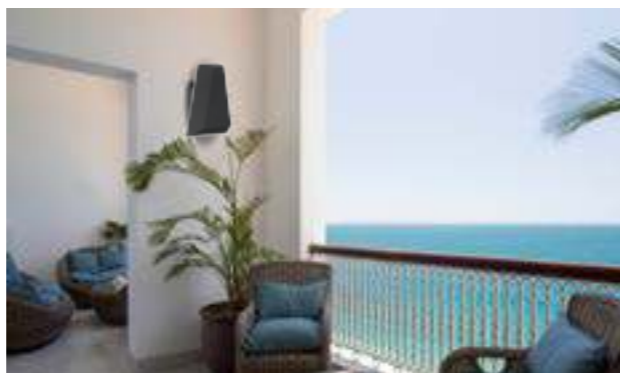

LEO-010

Watt: 3w
Dimension(mm): 76x81x63
LED chip: CREE
Material: Aluminium
Body color: Black
CCT: 2200/3000K
CRI: T
Beam Angle: 36°
Luminous Flux: 80lm/w
IP: IP44

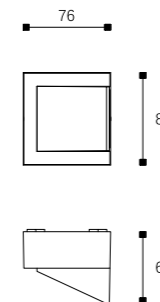


LEO-009

Watt: 4w
Dimension(mm): 150x70
LED chip: CREE
Material: Aluminium
Body color: Black
CCT: 2200/3000K
CRI: T
Beam Angle: 120°
Luminous Flux: 80lm/w
IP: IP44




LEO-008


Watt: 2w
Dimension(mm): 92x70
LED chip: CREE
Material: Aluminium
Body color: Black
CCT: 3000K
CRI: T
Beam Angle: 120°
Luminous Flux: 80lm/w
IP: IP44



LEO-011


Watt: 6w
Dimension(mm): 142x81x63
LED chip: CREE
Material: Aluminium
Body color: Black
CCT: 2200/3000K
CRI: T
Beam Angle: 36°
Luminous Flux: 80lm/w
IP: IP44





LEO-032

Watt: 3w
Dimension(mm): 90x40x60
LED chip: CREE
Material: Aluminium
Body color: Dark Grey
CCT: 3000K
CRI: T
Beam Angle: 5°
Luminous Flux: 180-200lm
IP: IP54

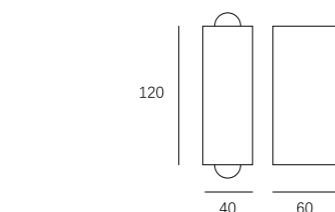


LEO-033

Watt: 6w
Dimension(mm): 120x40x60
LED chip: CREE
Material: Aluminium
Body color: Dark Grey
CCT: 3000K
CRI: T
Beam Angle: 5°
Luminous Flux: 180-200lm
IP: IP54




LEO-035

Watt: 3w
Dimension(mm): 66x70x42
LED chip: CREE
Material: Aluminium
Body color: Dark Grey
CCT: 3000K
CRI: T
Beam Angle: 90°
Luminous Flux: 300-310lm
IP: IP54



LEO-036

Watt: 6w
Dimension(mm): 88x70x42
LED chip: CREE
Material: Aluminium
Body color: Dark Grey
CCT: 3000K
CRI: T
Beam Angle: 90°
Luminous Flux: 540-600lm
IP: IP54




85-265V
50-60Hz




LEO-047

Watt: 10w
Dimension(mm): 141x52
LED chip: EPISTAR
Material: Aluminium+pc
Body color: Black/White
CCT: 3000/6000K
CRI: T
Luminous Flux: 998lm
IP: IP54




LEO-048

Watt: 18w
Dimension(mm): 171x53
LED chip: EPISTAR
Material: Aluminium+pc
Body color: Black/White
CCT: 3000/6000K
CRI: T
Luminous Flux: 1786lm
IP: IP54




LEO-045

Watt: 8w
Dimension(mm): 170x70
LED chip: EPISTAR
Material: Aluminium+pc
Body color: Black/White
CCT: 3000/6000K
CRI: T
Luminous Flux: 788lm
IP: IP54

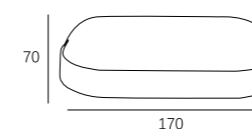

LEO-046

Watt: 15w
Dimension(mm): 208x98
LED chip: EPISTAR
Material: Aluminium+pc
Body color: Black/White
CCT: 3000/6000K
CRI: T
Luminous Flux: 1442lm
IP: IP54

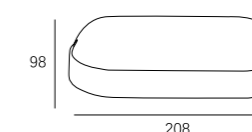


85-265V
50-60Hz



85-265V
50-60Hz




LEO-024




Watt: 3w
Dimension(mm): 80x80x40
Cut-Out: 72x72
LED chip: CREE
Material: Aluminium
Body color: White/Dark Grey
CCT: 3000K
CRI: T
Beam Angle: 60°
Luminous Flux: 240-260lm
IP: IP54



LEO-025



Watt: 3w
Dimension(mm): 80x80x40
Cut-Out: 72x72
LED chip: CREE
Material: Aluminium
Body color: White/Dark Grey
CCT: 3000K
CRI: T
Beam Angle: 60°
Luminous Flux: 240-260lm
IP: IP54




LEO-034


Watt: 3w
Dimension(mm): 60x60x35
Cut-Out: 45x45
LED chip: CREE
Material: Aluminium
Body color: White/Dark grey
CCT: 3000K
CRI: T
Beam Angle: 90°
Luminous Flux: 270-280lm
IP: IP54



LEO-042



Watt: 4w
Dimension(mm): 170x114x65
Cut-Out: 170x105x60
LED chip: CREE XBD
Material: Aluminium
Body color: Dark Grey
CCT: 3000K
CRI: T
Beam Angle: 30°
Luminous Flux: 80lm/w
IP: IP65

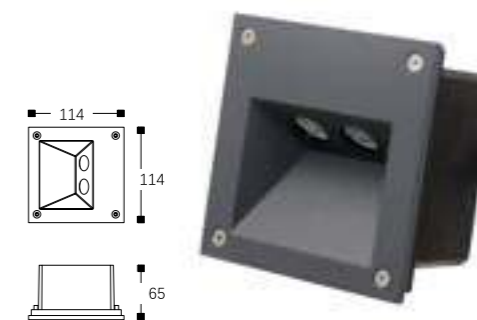


LEO-041

Watt: 2w
Dimension(mm): 114x114x65
Cut-Out: 114x105x60
LED chip: CREE XBD
Material: Aluminium
Body color: Dark Grey
CCT: 3000K
CRI: T
Beam Angle: 30°
Luminous Flux: 80lm/w
IP: IP65





LEO-043

Watt: 6w
Dimension(mm): 226x114x65
Cut-Out: 226x105x60
LED chip: CREE XBD
Material: Aluminium
Body color: Dark Grey
CCT: 3000K
CRI: T
Beam Angle: 30°
Luminous Flux: 80lm/w
IP: IP65

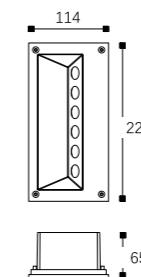





LEO-046A
 Watt: 15W
 Dimension(mm): L250*W90*H44
 LED chip: Sanan
 Material: PC
 Body color: Dark Grey
 CCT: 3000K/4000K/6500K
 CRI: > 70
 Beam Angle: 120°
 Luminous Flux: 1350LM
 IP: IP54

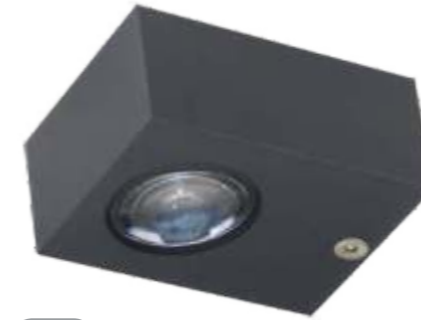


LEO-049
 Watt: 3W
 Dimension(mm): 80*60*35
 LED chip: EIPSTAR-COB
 Material: Die-casting
 Body color: Sand grey
 CCT: 3000K
 CRI: > 80
 Beam Angle: 85°
 Luminous Flux: 240LM
 IP: IP54




LEO-050
 Watt: 2*3W
 Dimension(mm): 80*60*35
 LED chip: EIPSTAR-COB
 Material: Die-casting
 Body color: Sand grey
 CCT: 3000K
 CRI: > 80
 Beam Angle: 85°
 Luminous Flux: 480LM
 IP: IP54




LEO-032A
 Watt: 2*3W
 Dimension(mm): 40x60x120
 LED chip: Bridgelux
 Material: Die-casting
 Body color: Sand grey
 CCT: 3000K
 CRI: > 80
 Beam Angle: 10/60°
 Luminous Flux: 500-550LM
 IP: IP54




LEO-032B
 Watt: 2*3W
 Dimension(mm): 40x60x120
 LED chip: Bridgelux
 Material: Die-casting
 Body color: Sand grey
 CCT: 3000K
 CRI: > 80
 Beam Angle: 60°
 Luminous Flux: 500-550LM
 IP: IP54




LEO-033A
 Watt: 3W
 Dimension(mm): 40x60x90
 LED chip: Bridgelux
 Material: Die-casting
 Body color: Sand grey
 CCT: 3000K
 CRI: > 80
 Beam Angle: 60°
 Luminous Flux: 250-270LM
 IP: IP54



LEO-051
 Watt: 2*3W
 Dimension(mm): 90*50
 LED chip: EIPSTAR-COB
 Material: Die-casting
 Body color: Sand grey
 CCT: 3000K
 CRI: > 80
 Beam Angle: 85°
 Luminous Flux: 480LM
 IP: IP54



LEO-052
 Watt: 4*3W
 Dimension(mm): 90*50
 LED chip: EIPSTAR-COB
 Material: Die-casting
 Body color: Sand grey
 CCT: 3000K
 CRI: > 80
 Beam Angle: 85°
 Luminous Flux: 960LM
 IP: IP54






LEO-053

Watt: 14W
Dimension(mm): $\Phi 90 \times 136$
LED chip: CREE
Material: Die-casting
Body color: Sand grey
CCT: 3000K
CRI: > 80
Beam Angle: 36°
Luminous Flux: 1120LM
IP: IP54




LEO-054

Watt: 14W
Dimension(mm): $90 \times 90 \times 136$
LED chip: CREE
Material: Die-casting
Body color: Sand grey
CCT: 3000K
CRI: > 80
Beam Angle: 36°
Luminous Flux: 1120LM
IP: IP54



LEO-055


Watt: 21W
Dimension(mm): $\Phi 145 \times 140$
LED chip: CREE
Material: Die-casting
Body color: Sand grey
CCT: 3000K
CRI: > 80
Beam Angle: 36°
Luminous Flux: 1680LM
IP: IP54







LEO-037

Watt: 8w
Dimension(mm): 90x46
LED chip: EPISTAR SMD 2835
Material: Aluminium+pc
Body color: Black
CCT: 3000K/4000K
CRI: T
Beam Angle: 180°
Luminous Flux: 95-100lm/w
IP: IP54




LEO-038

Watt: 16w
Dimension(mm): 140x46
LED chip: EPISTAR SMD 2835
Material: Aluminium+pc
Body color: Black
CCT: 3000K/4000K
CRI: T
Beam Angle: 180°
Luminous Flux: 95-100lm/w
IP: IP54

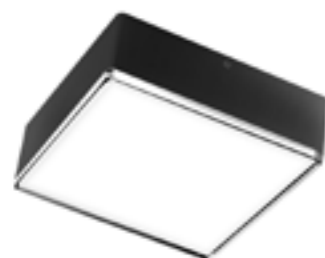



LEO-039

Watt: 8w
Dimension(mm): 90x90x46
LED chip: EPISTAR SMD 2835
Material: Aluminium+pc
Body color: Black
CCT: 3000K/4000K
CRI: T
Beam Angle: 180°
Luminous Flux: 95-100lm/w
IP: IP54




LEO-040

Watt: 16w
Dimension(mm): 140x140x46
LED chip: EPISTAR SMD 2835
Material: Aluminium+pc
Body color: Black
CCT: 3000K/4000K
CRI: T
Beam Angle: 180°
Luminous Flux: 95-100lm/w
IP: IP54




LEO-100

Watt: 2w
Dimension(mm): 65x80
LED chip: Bridgelux
Material: 304 stainless steel
Body color: silver
CCT: 3000K
CRI: T
Beam Angle: 15°
Luminous Flux: 80lm/w
IP: IP68
Voltage: 24V




LEO-101

Watt: 3w
Dimension(mm): 82x140
LED chip: Bridgelux
Material: 304 stainless steel
Body color: silver
CCT: 3000K
CRI: T
Beam Angle: 15°
Luminous Flux: 80lm/w
IP: IP68
Voltage: 24V




LEO-102

Watt: 6w
Dimension(mm): 120x140
LED chip: Bridgelux
Material: 304 stainless steel
Body color: silver
CCT: 3000K
CRI: T
Beam Angle: 10°
Luminous Flux: 80lm/w
IP: IP68
Voltage: 24V




LEO-102A

Watt: 6w
Dimension(mm): 120x140
LED chip: EPILEDS
Material: 304 stainless steel
Body color: silver
CCT: RGB
CRI: T
Beam Angle: 10°
IP: IP68
Voltage: 24V




LEO-103

Watt: 12w
Dimension(mm): 145x180
LED chip: Bridgelux
Material: 304 stainless steel
Body color: silver
CCT: 3000K
CRI: T
Beam Angle: 10°
Luminous Flux: 80lm/w
IP: IP68
Voltage: 24V




LEO-103A

Watt: 12w
Dimension(mm): 145x180
LED chip: EPILEDS
Material: 304 stainless steel
Body color: silver
CCT: RGB
CRI: T
Beam Angle: 10°
IP: IP68
Voltage: 24V



LEO-104

Watt: 12w
Dimension(mm): 160x85
LED chip: Bridgelux
Material: 304 stainless steel
Body color: silver
CCT: 3000K
CRI: T
Beam Angle: 10°
Luminous Flux: 80lm/w
IP: IP68
Voltage: 24V




LEO-105

Watt: 3w
Dimension(mm): 100x90
Cut-Out(mm): 88
LED chip: Bridgelux
Material: 304 stainless steel
Body color: silver
CCT: 3000K
CRI: T
Beam Angle: 10°
Luminous Flux: 80lm/w
IP: IP68
Voltage: 24V



LEO-106

Watt: 7w
Dimension(mm): 120x90
Cut-Out(mm): 108
LED chip: EPISTAR
Material: 304 stainless steel
Body color: silver
CCT: RGB
CRI: T
Beam Angle: 10°
Luminous Flux: 80lm/w
IP: IP68
Voltage: 24V



LEO-107A

Watt: 12w
Dimension(mm): 150x95
Cut-Out(mm): 136
LED chip: EPISTAR
Material: 304 stainless steel
Body color: silver
CCT: RGB
CRI: T
Luminous Flux: 80lm/w
IP: IP68
Voltage: 24V



LEO-107

Watt: 12w
Dimension(mm): 150x95
Cut-Out(mm): 136
LED chip: Bridgelux
Material: 304 stainless steel
Body color: silver
CCT: 3000K
CRI: T
Beam Angle: 10°
Luminous Flux: 80lm/w
IP: IP68
Voltage: 24V



IP54



IP65



IP68