




PRISHA

ILLUMINATION

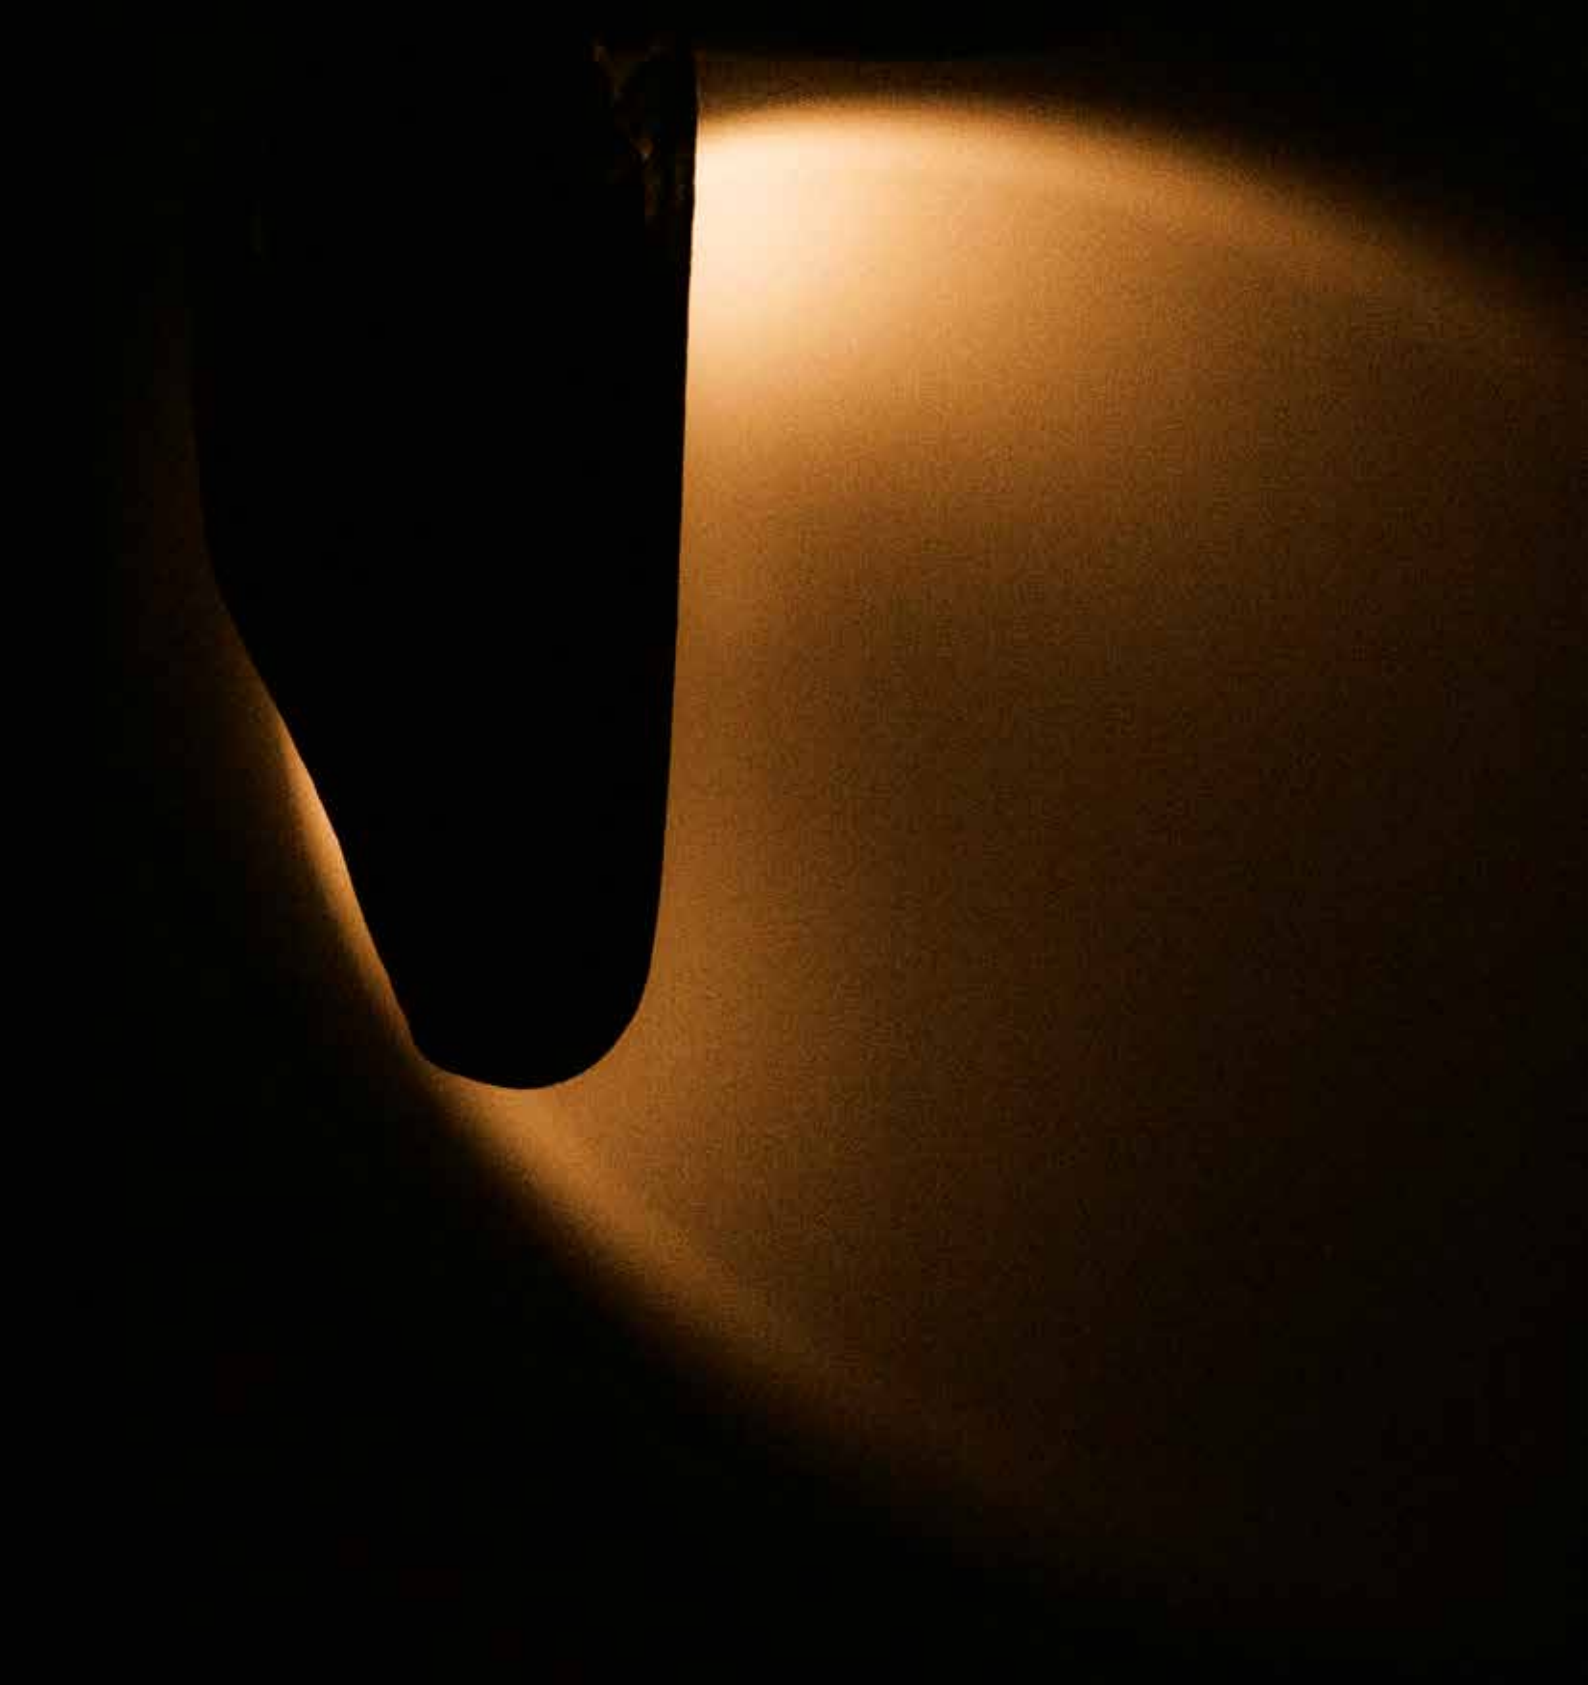

LIGHTS THAT BRIGHTEN UP THE ROOM.

Isn't that what lights are supposed to do?

Prisha Illumination isn't just about lighting, it's about precision. The type of precision that allows the illuminated to embrace the space it shall cater to, built in with flexibility that allows the space to brighten up just right.

With over a decade of experience in the lighting industry, Prisha Illumination caters to its clientele with not only the most premium fixtures but with a niche retail experience, that sets the brand apart. The retail experience is a well thought avenue to allow and initiate interaction with clients and end users, consultants, architects & designers, that empowers Prisha Illumination to build a formidable range of lighting fixtures that answers to today's lighting needs as well as desires.

Immaculately coated, well designed aluminum heat sinks for heat dissipation, acceptable CRI standards especially for retail, and most importantly 'flexibility', are some of the aspects that Prisha Illumination emphasizes on while working on the fixture designs through quality make & fit.

Considering LED has stormed the market in form of energy efficiency, lamps and fixtures, for Prisha Illumination environmental viability and optimum efficiency play an important role in the make & fit, and a conscious decision to maintain the same has been taken in manufacturing the ranges.



PG - 8



PG - 8



PG - 9



PG - 10




PG - 10



PG - 10



PG - 10



PG - 11



PG - 11



PG - 11



PG - 12



PG - 12



PG - 13



PG - 13



PG - 13



PG - 13



PG - 14



PG - 14




PG - 15



PG - 15



PG - 16



PG - 16



PG - 16



PG - 16



PG - 17



PG - 17



PG - 17



PG - 18



PG - 18



PG - 18



PG - 18



PG - 19



PG - 19



PG - 19



PG - 19



PG - 20



PG - 20



PG - 20



PG - 21



PG - 21



PG - 21



PG - 22



PG - 22



PG - 22



PG - 23



PG - 23




PG - 23



PG - 24



PG - 25



PG - 26 - 27



PG - 28



PG - 28



PG - 29



PG - 29



PG - 30



PG - 30



PG - 31



PG - 31



PG - 31



PG - 32



PG - 32



PG - 33



PG - 33



PG - 34



PG - 34



PG - 35



PG - 35



PG - 36



PG - 37



PG - 38



PG - 39



PG - 39



PG - 39



PG - 40



PG - 40



PG - 42



PG - 43



PG - 44



PG - 44



PG - 44



PG - 45



PG - 45




PG - 47



PG - 47



PG - 47



PG - 48



PG - 48



PG - 49



PG - 49



PG - 49



PG - 50



PG - 50



PG - 51



PG - 51



PG - 51



PG - 51



PG - 51



PG - 52



PG - 52



PG - 53



PG - 55



PG - 55



PG - 56



PG - 56



PG - 57



PG - 58



PG - 59



PG - 60



PG - 61



PG - 62



PG - 63



PG - 64



PG - 65



PG - 66



PG - 67



PG - 70



PG - 71



PG - 72



PG - 73



PG - 74



PG - 75



PG - 75



PG - 76



PG - 76



PG - 76



PG - 77



PG - 77



PG - 78



PG - 78



PG - 79



PG - 81



PG - 82



PG - 83



PG - 83



PG - 84



PG - 84



PG - 86



PG - 86



PG - 87



PG - 88



PG - 89



PG - 90



PG - 90



PG - 91



PG - 92



PG - 92



PG - 93



PG - 96



PG - 96



PG - 97



PG - 97



PG - 97



PG - 98



PG - 99



PG - 99



PG - 100



PG - 100



PG - 100



PG - 100



PG - 101



PG - 102



PG - 102



PG - 102



PG - 102



PG - 103



PG - 104



PG - 104



PG - 105



PG - 105



PG - 106



PG - 106



PG - 107



PG - 107



PG - 107



PG - 107



PG - 108



PG - 108




PG - 108




PG - 108



PG - 109



PG - 109



PG - 109



PG - 109



PG - 110



PG - 110



PG - 110



PG - 111



PG - 111



PG - 111



PG - 112



PG - 112



PG - 113



PG - 113



PG - 113



PG - 114



PG - 114



PG - 115



PG - 116



PG - 116



PG - 117



PG - 118




PG - 118



PG - 119



PG - 120



PG - 120



PG - 121



PG - 121



PG - 122



PG - 122



PG - 123



PG - 123



PG - 123



PG - 124



PG - 124



PG - 125



PG - 125



PG - 126




PG - 127



PG - 128



PG - 128



PG - 128




PG - 129



PG - 130

Illuminate Your Space, Elevate Your Style.

Lighting that transcends the ordinary, weaving a symphony of design and ambiance to transform your surroundings into a masterpiece of modern living.

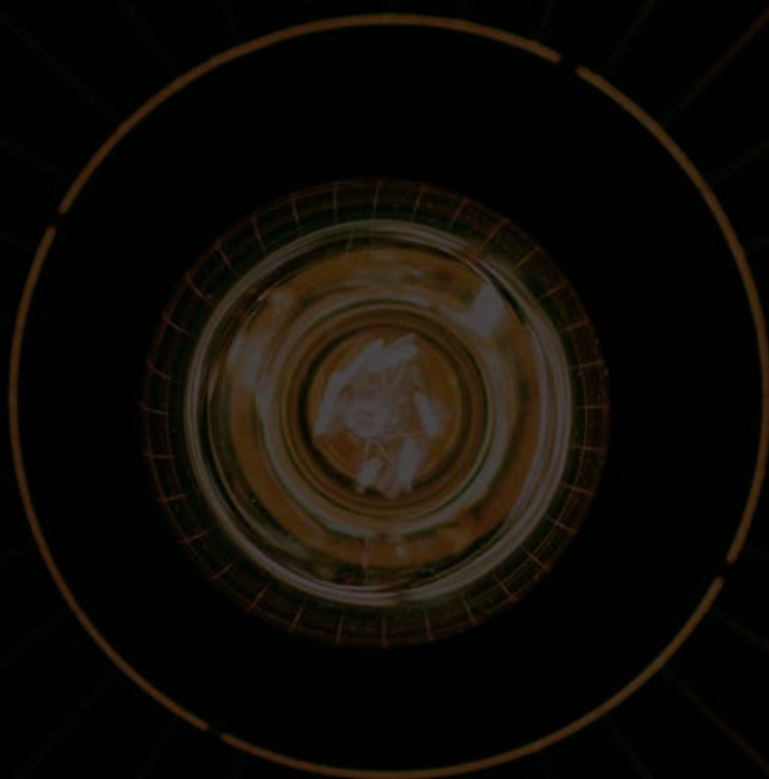

PRISHA PRIVE

Premium and a top line series of PRISHA, PRIVE as a collection comprises of high quality luminaires with better technical abilities

Used here is Prisha IDO 1A


Location: DressCircle
Props: Drape Shoppe






PL15 - S1000

FINISH : MATT BLACK
 MATERIAL : ALUMINIUM
 MOUNTING : SURFACE
 DIMENSION : 24 X 51 X 1000




PL15 - S2000

FINISH : MATT BLACK
 MATERIAL : ALUMINIUM
 MOUNTING : SURFACE
 DIMENSION : 24 X 51 X 2000




PL15 - R1000

FINISH : MATT BLACK
 MATERIAL : ALUMINIUM
 MOUNTING : SURFACE
 DIMENSION : 60 X 51 X 1000
 CUTOUT : 24 MM



PL15 - R2000

FINISH : MATT BLACK
 MATERIAL : ALUMINIUM
 MOUNTING : SURFACE
 DIMENSION : 60 X 51 X 2000
 CUTOUT : 24 MM





PL 15 - M1
HANGING ACCESORIES



PL 15 - M2
POWER CORD



PL 15 - M3
CORNER CONNECTOR



PL 15 - M4
STRAIGHT CONNECTOR



PL 15 - M5
TRACK JOINTER PLATE



PL 15 - M6
SURFACE L JOINTER



PL 15 - M7
RECESSED L JOINTER



PL 15 - M8
CEILING TO WALL
RECESSED JOINTER



PL 15 - 80W - 48V
POWER SUPPLY (DRIVER)



PL 15 - 150W - 48W
POWER SUPPLY (DRIVER)

6W



PL15 - A1

WATTS	: 6W
FINISH	: SAND BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT (K)	: 3000K, 4000K
CRI	: ≥ 90
DIMENSION	: L118 X W15 X H42
LUMENS	: 600LM
POWERED BY	: OSRAM
INPUT	: 48V DRIVER

12W



PL15 - A2

WATTS	: 12W
FINISH	: SAND BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT (K)	: 3000K, 4000K
CRI	: ≥ 90
DIMENSION	: L232 X W15 X H42
LUMENS	: 1200LM
POWERED BY	: OSRAM
INPUT	: 48V DRIVER

DALI DIMMABLE AVAILABLE

6W



PL15 - A7

WATTS	: 6W
FINISH	: SAND BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT (K)	: 3000K, 4000K
CRI	: ≥ 90
DIMENSION	: L118 X W15 X H100
LUMENS	: 600LM
POWERED BY	: OSRAM
INPUT	: 48V DRIVER

12W



PL15 - A8

WATTS	: 12W
FINISH	: SAND BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT (K)	: 3000K, 4000K
CRI	: ≥ 90
DIMENSION	: L232 X W15 X H100
LUMENS	: 1200LM
POWERED BY	: OSRAM
INPUT	: 48V DRIVER

DALI DIMMABLE AVAILABLE



PL15 - A10

WATTS	: 22W
FINISH	: SAND BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 120°
CCT (K)	: 3000K, 4000K
CRI	: ≥ 90
DIMENSION	: Ø 27 X 600
LUMENS	: 1760LM
POWERED BY	: OSRAM
INPUT	: 48V DRIVER



PL15 - A3

WATTS	: 10W
FINISH	: SAND BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 120°
CCT (K)	: 3000K, 4000K
CRI	: ≥ 90
DIMENSION	: L300 X W15 X H22
LUMENS	: 900LM
POWERED BY	: OSRAM
INPUT	: 48V DRIVER

DALI DIMMABLE AVAILABLE



PL15 - A4

WATTS	: 20W
FINISH	: SAND BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 120°
CCT (K)	: 3000K, 4000K
CRI	: ≥ 90
DIMENSION	: L600 X W15 X H25
LUMENS	: 1800LM
POWERED BY	: OSRAM
INPUT	: 48V DRIVER

DALI DIMMABLE AVAILABLE

12W



PL15 - A6

WATTS	: 12W
FINISH	: SAND BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 24°
CCT (K)	: 3000K, 4000K
CRI	: ≥ 90
DIMENSION	: Ø 45 X 100
LUMENS	: 1320LM
POWERED BY	: OSRAM
INPUT	: 48V DRIVER

DALI DIMMABLE AVAILABLE

7W



PL15 - A5

WATTS	: 7W
FINISH	: SAND BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 24°
CCT (K)	: 3000K, 4000K
CRI	: ≥ 90
DIMENSION	: Ø 35 X 80
LUMENS	: 770LM
POWERED BY	: OSRAM
INPUT	: 48V DRIVER

7W



PL15 - A9

WATTS	: 7W
FINISH	: SAND BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 24°
CCT (K)	: 3000K, 4000K
CRI	: ≥ 90
DIMENSION	: Ø 25 X 300
LUMENS	: 1800LM
POWERED BY	: BRIDGLUX
INPUT	: 48V DRIVER



PRR COCK 1

MOUNTING : SURFACE MOUNTED
FINISH : SAND BLACK
DIMENSION : 455 X 15 X 15 MM
IP : IP20

POWER SUPPLY (DRIVER-24V) NOT INCLUDED

PRR COCK 2

MOUNTING : SURFACE MOUNTED
FINISH : SAND BLACK
DIMENSION : 955 X 15 X 15 MM
IP : IP20

POWER SUPPLY (DRIVER-24V) NOT INCLUDED



PRR SENSE 1

MOUNTING : BUCKLE (USED IN SHOWCASE)
MATERIAL : PC
SENSOR : GESTURE CONTROL SENSOR
IP : IP20
DIMENSION : 64 X 10 X 12 MM

PRR SENSE 2


MOUNTING : BUCKLE (USED IN WARDROBE)
MATERIAL : PC
SENSOR : DOOR CONTROL SENSOR
IP : IP20
DIMENSION : 36 X 14 X 14 MM






PRR TAIL 1



WATTS	: 3W
MATERIAL	: ALUMINIUM + PC
FINISH	: SAND BLACK
BEAM ANGLE	: 24°
CCT(K)	: 3000K
CRI	: RA>80
DIMENSION	: 26 X 56 MM
LUMENS	: 240LM
MOUNTING	: BUCKLE
POWERED BY	: CREE
IP	: IP20



PRR TAIL 2


WATTS	: 6W
MATERIAL	: ALUMINIUM + PC
FINISH	: SAND BLACK
BEAM ANGLE	: 90°
CCT(K)	: 3000K
CRI	: RA>80
DIMENSION	: 12 X 10 X 249 MM
LUMENS	: 40LM
MOUNTING	: BUCKLE
POWERED BY	: OSRAM SMD
IP	: IP20



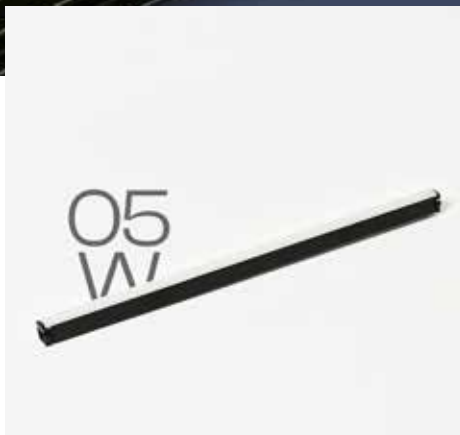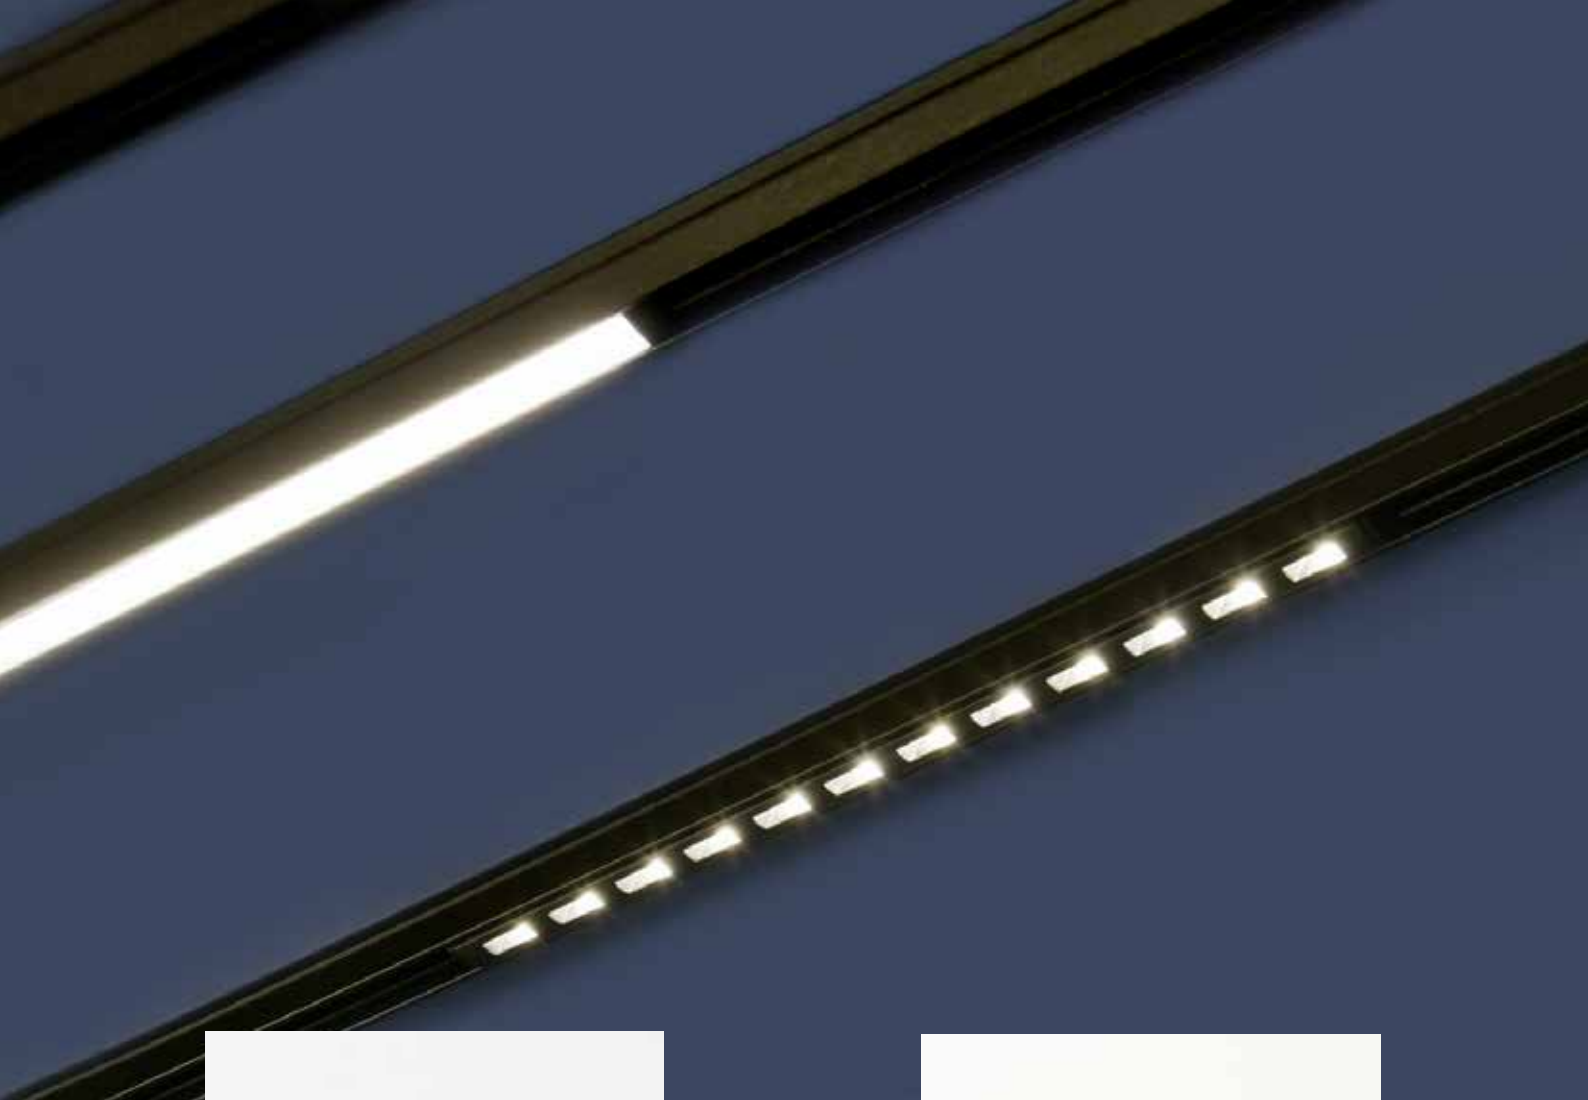


PRR TAIL 3

WATTS	: 5W
MATERIAL	: ALUMINIUM + PC
FINISH	: SAND BLACK
BEAM ANGLE	: 120°
CCT(K)	: 3000K
CRI	: RA>80
DIMENSION	: 12 X 10 X 249 MM
LUMENS	: 30LM
MOUNTING	: BUCKLE
POWERED BY	: BRIDGELUX SMD
IP	: IP20



PRR TAIL 4

WATTS	: 5W
MATERIAL	: ALUMINIUM + PC
FINISH	: SAND BLACK
BEAM ANGLE	: 120° + 10°
CCT(K)	: 3000K
CRI	: RA>80
DIMENSION	: 20.5 X 15 X 249 MM
LUMENS	: 55LM
MOUNTING	: BUCKLE
POWERED BY	: BRIDGELUX SMD
IP	: IP20






PRR CABY 1

WATTS	: 5W
MATERIAL	: ALUMINIUM
FINISH	: SAND BLACK
BEAM ANGLE	: 15 - 45 (ADJUSTABLE)
CCT(K)	: 3000K
DIMENSION	: 35 X 44 X 110 MM
CUTOUT	: 35 MM
LUMEN	: 400LM
MOUNTING	: RECESSED
IP	: IP20
INPUT	: 24V DRIVER NOT INCLUDED



PRR CABY 2

WATTS	: 5W
MATERIAL	: ALUMINIUM
FINISH	: SAND BLACK
BEAM ANGLE	: 15 - 45 (ADJUSTABLE)
CCT(K)	: 3000K
DIMENSION	: 35 X 99 X 233 MM
CUTOUT	: 35 MM
LUMEN	: 400LM
MOUNTING	: RECESSED
IP	: IP20
INPUT	: 24V DRIVER NOT INCLUDED

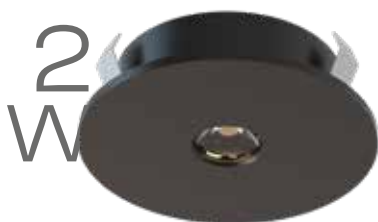

PRR CABY 3

WATTS	: 2W
MATERIAL	: ALUMINIUM
FINISH	: SAND BLACK
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K
DIMENSION	: 44 X H14
CUTOUT	: 35 MM
LUMEN	: 180LM
MOUNTING	: RECESSED
IP	: IP20
INPUT	: 24V DRIVER NOT INCLUDED



PRR CABY 4

WATTS	: 2W
MATERIAL	: ALUMINIUM
FINISH	: SAND BLACK
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K
DIMENSION	: 34 X H14
LUMEN	: 180LM
MOUNTING	: SURFACE
IP	: IP20
INPUT	: 24V DRIVER NOT INCLUDED



PRR WASH 1B

WATTS	: 25W
MATERIAL	: ALUMINIUM
FINISH	: SAND BLACK
BEAM ANGLE	: 10° V X 65° H
CCT(K)	: 3000K
CRI	: RA>90
DIMENSION	: 643 X 92 X 72 MM
LUMEN	: 2500LM
MOUNTING	: RECESSED
CUTOUT	: 620 X 80 MM
IP	: IP20
POWERED BY	: BRIDGELUX



PRR WASH 2B


WATTS	: 25W
MATERIAL	: ALUMINIUM
FINISH	: SAND BLACK
BEAM ANGLE	: 10° V X 65° H
CCT(K)	: 3000K
CRI	: RA>90
DIMENSION	: 643 X 38 X 71 MM
LUMEN	: 2500LM
MOUNTING	: SURFACE
IP	: IP20
POWERED BY	: BRIDGELUX

35
W



PRR WASHER

WATTS	: 35W
MATERIAL	: ALUMINIUM
FINISH	: SAND BLACK
COVERAGE	: 3 MTR X 7 MTR
CCT(K)	: 3000K
CRI	: RA>90
DIMENSION	: 186 X 60 X 178 MM
LUMEN	: 3500LM
MOUNTING	: SURFACE
IP	: IP20
POWERED BY	: BRIDGELUX

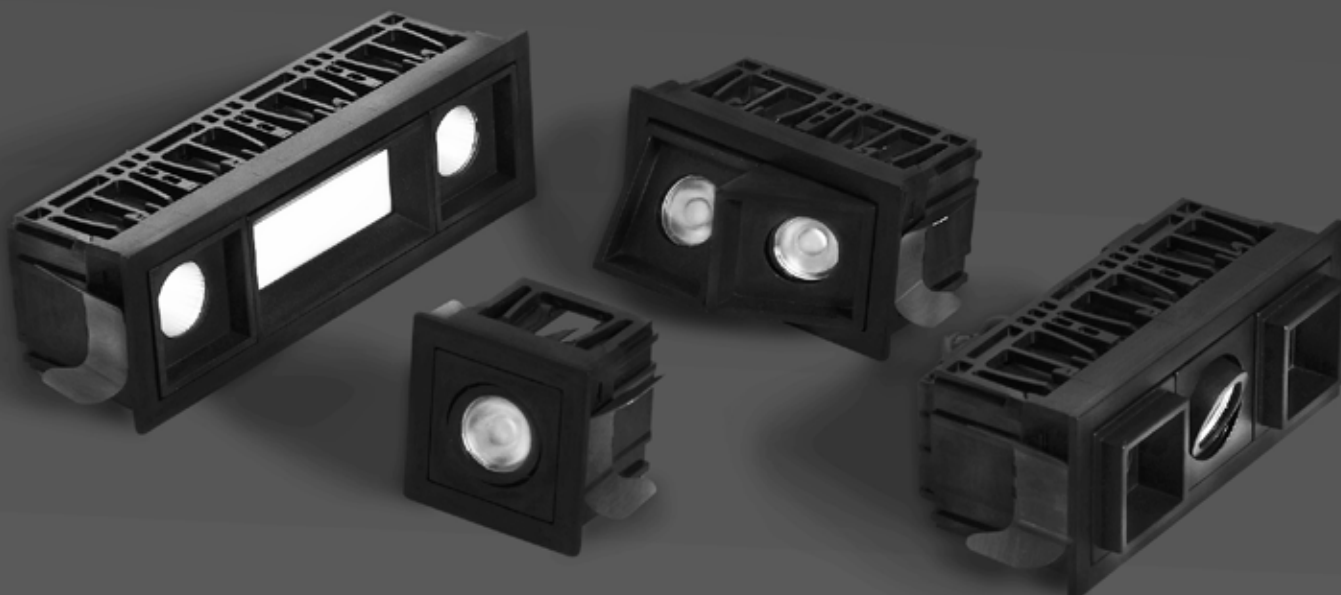

PRR PLATE 1

MATERIAL : ALUMINIUM + PC
BODY COLOUR : BLACK
DIMENSION : 63.5 X 63.5 X H 51 MM
CUT SIZE : 55 X 55 MM



PRR PLATE 2

MATERIAL : ALUMINIUM + PC
BODY COLOUR : BLACK
DIMENSION : 110.5 X 63.5 X H 57 MM
CUT SIZE : 105 X 55 MM




PRR PLATE 3

MATERIAL : ALUMINIUM + PC
BODY COLOUR : BLACK
DIMENSION : 158 X 63.5 X H 57 MM
CUT SIZE : 150 X 55 MM



PRR PLATE 4

MATERIAL : ALUMINIUM + PC
BODY COLOUR : BLACK
DIMENSION : 205 X 63.5 X H 57 MM
CUT SIZE : 200 X 55 MM

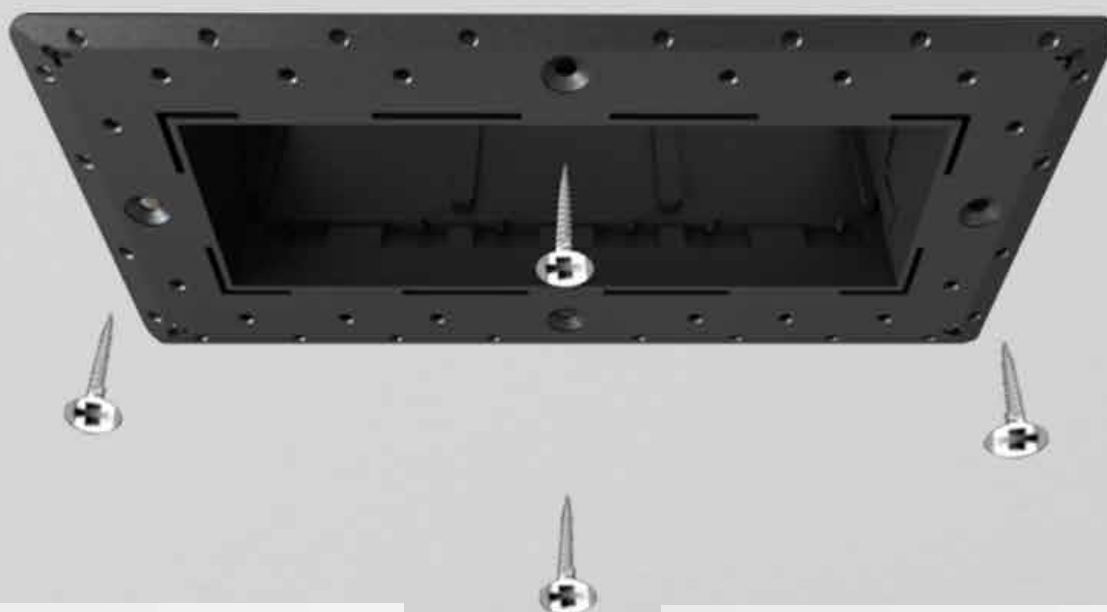

PRR PLATELESS 1

MATERIAL : PC
 DIMENSION : 95 X 95 X H 51.5 MM
 CUT SIZE : 60 X 60 MM



PRR PLATELESS 2

MATERIAL : PC
 DIMENSION : 145 X 95 X H 57 MM
 CUT SIZE : 105 X 60 MM



PRR PLATELESS 3

MATERIAL : PC
 DIMENSION : 189 X 95 X H 57 MM
 CUT SIZE : 150 X 60 MM



PRR PLATELESS 4

MATERIAL : PC
 DIMENSION : 236 X 95 X H 57 MM
 CUT SIZE : 200 X 60 MM

05
W



PRR LUDO 1

WATTS	: 5W
MATERIAL	: ALUMINIUM
FINISH	: BLACK
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K
CRI	: RA>80
DIMENSION	: 46 X 46 X 67MM
LUMENS	: 450LM
MOUNTING	: PRESS FIT - 2 STEP
IP	: IP20

05
W



PRR LUDO 2

WATTS	: 5W
MATERIAL	: ALUMINIUM
FINISH	: BLACK
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K
CRI	: RA>80
DIMENSION	: 44 X 44 X 70MM
LUMENS	: 450LM
MOUNTING	: PRESS FIT - 2 STEP
IP	: IP20

05
W



PRR LUDO 3

WATTS	: 5W (WALL WASHER)
MATERIAL	: ALUMINIUM
FINISH	: BLACK
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K
CRI	: RA>80
DIMENSION	: 46 X 46 X 83MM
LUMENS	: 450LM
MOUNTING	: PRESS FIT - 2 STEP
IP	: IP20



PRR LUDO 4

WATTS	: 5W (ADJUSTABLE)
MATERIAL	: ALUMINIUM
FINISH	: BLACK
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K
CRI	: RA>80
DIMENSION	: 44 X 44 X 70MM
LUMENS	: 450LM
MOUNTING	: PRESS FIT - 2 STEP
IP	: IP20



PRR LUDO 5

WATTS	: 10W
MATERIAL	: ALUMINIUM
FINISH	: BLACK
BEAM ANGLE	: 110°
CCT(K)	: 3000K, 4000K
CRI	: RA>80
DIMENSION	: 93 X 46 X 67MM
LUMENS	: 900LM
MOUNTING	: PRESS FIT - 2 STEP
IP	: IP20



PRR LUDO 6

WATTS	: 5W (HANGING)
MATERIAL	: ALUMINIUM
FINISH	: BRASS
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K
CRI	: RA>80
DIMENSION	: 32 X 120MM (HANGING CABLE HEIGHT ADJUSTABLE)
LUMENS	: 450LM
MOUNTING	: PRESS FIT - 2 STEP
IP	: IP20

3W



PRR FLASH 1A

WATTS	: 3W
FINISH & MATERIAL	: MATT WHITE
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K
CRI	: ≥ 90
DIMENSION	: Ø 20 X H 71 MM
CUT OUT	: Ø 18 MM
LUMENS	: 270LM
POWER FACTORE	: ≥ 0.5
POWERED BY	: BRIDGELUX

3W



PRR FLASH 1B

WATTS	: 3W
FINISH & MATERIAL	: MATT BLACK
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K
CRI	: ≥ 90
DIMENSION	: Ø 20 X H 71 MM
CUT OUT	: Ø 18 MM
LUMENS	: 270LM
POWER FACTORE	: ≥ 0.5
POWERED BY	: BRIDGELUX

3W



PRR FLASH 1C

WATTS	: 3W
FINISH & MATERIAL	: NICKLE BLACK
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K
CRI	: ≥ 90
DIMENSION	: Ø 20 X H 71 MM
CUT OUT	: Ø 18 MM
LUMENS	: 270LM
POWER FACTORE	: ≥ 0.5
POWERED BY	: BRIDGELUX

PRR FLASH 2A

WATTS	: 5W
FINISH & MATERIAL	: MATT WHITE
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K
CRI	: ≥ 90
DIMENSION	: Ø 29 X H 63 MM
CUT OUT	: Ø 25 MM
LUMENS	: 450LM
POWER FACTORE	: ≥ 0.5
POWERED BY	: BRIDGELUX



PRR FLASH 2B

WATTS	: 5W
FINISH & MATERIAL	: MATT BLACK
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K
CRI	: ≥ 90
DIMENSION	: Ø 29 X H 63 MM
CUT OUT	: Ø 25 MM
LUMENS	: 450LM
POWER FACTORE	: ≥ 0.5
POWERED BY	: BRIDGELUX



PRR FLASH 2C

WATTS	: 5W
FINISH & MATERIAL	: NICKLE BLACK
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K
CRI	: ≥ 90
DIMENSION	: Ø 29 X H 63 MM
CUT OUT	: Ø 25 MM
LUMENS	: 450LM
POWER FACTORE	: ≥ 0.5
POWERED BY	: BRIDGELUX

06
W



PRR WESTOR 1A - 1B

WATTS	: 6W
FINISH & MATERIAL	: MATT BLACK/MATT WHITE + ALUMINIUM
REFLECTOR	: NICKLE BLACK/ WHITE/ BLACK/ CHROME/ GOLDEN (GLARELESS)
BEAM ANGLE	: 15° / 24° / 36°
CCT(K)	: 3000K, 4000K
CRI	: ≥ 90
DIMENSION	: Ø 50 X H 65 MM
CUT OUT	: Ø 45 MM
LUMENS	: 750 LM
POWERED BY	: BRIDGELUX

(1A - WHITE / 1B - BLACK)





PRR WESTOR 2A -2B

WATTS	: 10W
FINISH & MATERIAL	: MATT BLACK/MATT WHITE + ALUMINIUM
REFLECTOR	: NICKLE BLACK/ WHITE/ BLACK/ CHROME/ GOLDEN (GLARELESS)
BEAM ANGLE	: 15° / 24° / 36°
CCT(K)	: 3000K, 4000K
CRI	: ≥ 90
DIMENSION	: Ø 50 X H 105 MM
CUT OUT	: Ø 45 MM
LUMENS	: 1250 LM
POWERED BY	: BRIDGELUX

(2A - WHITE / 2B - BLACK)



PRR CARTER 1A (WHITE)

DIMENSION : Ø 50 X H 18 MM
CUT OUT : Ø 45 MM

Included with WESTOR 1A & 2A



PRR CARTER 2A (WHITE)

DIMENSION : Ø 60 X H 18 MM
CUT OUT : Ø 55 MM



PRR CARTER 1B (BLACK)

DIMENSION : Ø 50 X H 18 MM
CUT OUT : Ø 45 MM

Included with WESTOR 1B & 2B




PRR CARTER 2B (BLACK)

DIMENSION : Ø 60 X H 18 MM
CUT OUT : Ø 55 MM



PRR CARTER 3A (TRIMLESS)

DIMENSION : Ø 60 X H 10 MM
CUT OUT : Ø 45 MM

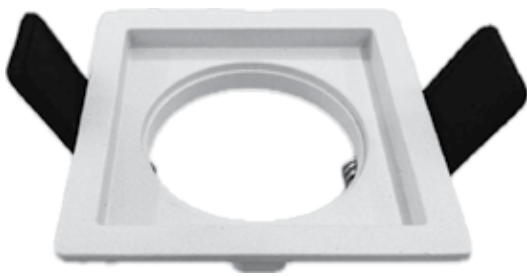

PRR CARTER 4A (WHITE)

DIMENSION : 60 X 60 X H 17 MM
CUT OUT : 55 X 55 MM



PRR CARTER 5A (WHITE)

DIMENSION : 112 X 61 X H 25 MM
CUT OUT : 105 X 55 MM



PRR CARTER 6A (WHITE)

DIMENSION : 162 X 61 X H 25 MM
CUT OUT : 105 X 55 MM



PRR CARTER 7A (WHITE)

DIMENSION : 112 X 112 X H 25 MM
CUT OUT : 105 X 105 MM




PRR CARTER 8A (WHITE)

DIMENSION : 262 X 61 X H 25 MM
CUT OUT : 205 X 55 MM



PRR GLEAM 1A/1B

WATTS	: 10W
MATERIAL	: ALUMINIUM
REFLECTOR	: SHINE BLACK / CHROME (GLARELESS)
BEAM ANGLE	: 36° OR 15°
CCT(K)	: 3000K, 4000K, 5000K
CRI	: ≥ 90
DIMENSION	: 72 X H 76 MM
CUT-OUT	: Ø 65
LUMENS	: 1200LM
POWERED BY	CREE



1A - MATT WHITE | 1B - MATT BLACK



PRR GLEAM 2A/2B

WATTS	: 15W
MATERIAL	: ALUMINIUM
REFLECTOR	: SHINE BLACK / CHROME (GLARELESS)
BEAM ANGLE	: 36° OR 15°
CCT(K)	: 3000K, 4000K, 5000K
CRI	: ≥ 90
DIMENSION	: 88 X H 88 MM
CUT-OUT	: Ø 80 MM
LUMENS	: 1800LM
POWERED BY	CREE



2A - MATT WHITE | 2B - MATT BLACK



PRR GLOW 1A/1B

WATTS	: 8W ADJUSTABLE
FINISH	: WHITE / BLACK
MATERIAL	: ALUMINIUM
REFLECTOR	: MATT WHITE, MATT BLACK, CHROME & SHINE BLACK
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K
CRI	: ≥ 90
DIMENSION	: 82 X H 46 MM
CUT-OUT	: Ø 75
LUMENS	: 960LM
POWERED BY	CREE

1A - white | 1B - black



PRR GLOW 2A/2B

WATTS	: 12W ADJUSTABLE
FINISH	: WHITE / BLACK
MATERIAL	: ALUMINIUM
REFLECTOR	: MATT WHITE, MATT BLACK, CHROME & SHINE BLACK
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K
CRI	: ≥ 90
DIMENSION	: 82 X H 46 MM
CUT-OUT	: Ø 75
LUMENS	: 1440LM
POWERED BY	CREE

2A - white | 2B - black




PRR GLEN (TRIMLESS)

WATTS	: 10W (ADJUSTABLE)
MATERIAL	: MATT WHITE & ALUMINIUM & GLARELESS REFLECTOR
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K
CRI	: ≥ 90
DIMENSION	: 77 X 65 H MM
CUT-OUT	: Ø 77
LUMENS	: 1250LM
POWERED BY	CREE



PRR EVA HIDE (TRIMLESS)

WATTS	: 9W
MATERIAL	: ALUMINIUM DIE-CAST
FINISH	: SAND WHITE/BLACK
BEAM ANGLE	: 23°
CCT(K)	: 3000K, 4000K
CRI	: RA>90
DIMENSION	: 86 X H 120 MM
CUT-OUT	: Ø 114 X 150 MM
LUMENS	: 945LM
ADJUST. ANGLE	: LAMP HEAD 0 ~ 20 / 360°

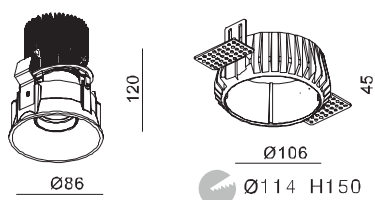



PRR LUMI 1B

WATTS	: 10W
FINISH	: SAND BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 24°
CCT (K)	: 3000K, 4000K
CRI	: ≥ 90
DIMENSION	: L 147 X W 45 X H 42 MM
CUT-OUT	: L 142 X W 37 MM
LUMENS	: 900LM
POWERED BY	: OSRAM

PRR LUMI 2B

WATTS	: 20W
FINISH	: SAND BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 24°
CCT (K)	: 3000K, 4000K
CRI	: ≥ 90
DIMENSION	: L 280 X W 45 X H 42 MM
CUTOUT	: L 275 X W 37 MM
LUMENS	: 1800LM
POWERED BY	: OSRAM



PRR LUMI 3B

WATTS	: 9W
FINISH	: SAND BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT (K)	: 3000K, 4000K
CRI	: ≥ 90
DIMENSION	: Ø 85 X 35MM
CUT-OUT	: Ø 75 MM
LUMENS	: 1800LM
POWERED BY	: OSRAM

14W



PRR RIGA 1B

WATTS	: 2 X 7W
FINISH	: SAND BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 38°
CCT(K)	: 3000K, 4000K
CRI	: ≥ 90
DIMENSION	: L 112 X W 112 X H 88 MM
CUT-OUT	: L 100 X W 100 MM
LUMENS	: 1150LM
POWERED BY	: OSRAM

14W



PRR RIGA 2B

WATTS	: 4 X 7W
FINISH	: SAND BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 38°
CCT(K)	: 3000K, 4000K
CRI	: ≥ 90
DIMENSION	: L 194 X W 112 X H 88 MM
CUT-OUT	: L 180 X W 100 MM
LUMENS	: 2300LM
POWERED BY	: OSRAM



PRR ENZO 1A

WATTS	: 12W
FINISH	: SAND WHITE + SAND WHITE
CCT(K)	: 3000K, 4000K
CRI	: ≥ 90
DIMENSION	: Ø L 85 X 88 MM
CUT-OUT	: Ø 75 MM
LUMENS	: 1200LM
POWERED BY	CREE



PRR ENZO 1B

WATTS	: 12W
FINISH	: SAND BLACK + SAND BLACK
CCT(K)	: 3000K, 4000K
CRI	: ≥ 90
DIMENSION	: Ø L 85 X 88 MM
CUT-OUT	: Ø 75 MM
LUMENS	: 1200LM
POWERED BY	CREE



PRR TITO 1A

WATTS	: 12W
FINISH	: SAND WHITE + SAND WHITE
CCT(K)	: 3000K, 4000K
CRI	: ≥ 90
DIMENSION	: Ø L 85 X 88 MM
CUT-OUT	: Ø 75 MM
LUMENS	: 1200LM
POWERED BY	CREE

PRR TITO 1B

WATTS	: 12W
FINISH	: SAND BLACK + SAND BLACK
CCT(K)	: 3000K, 4000K
CRI	: ≥ 90
DIMENSION	: Ø L 85 X 88 MM
CUT-OUT	: Ø 75 MM
LUMENS	: 1200LM
POWERED BY	CREE



PRR CANO 1A

WATTS	: 12W
FINISH	: SAND WHITE + SAND WHITE
CCT(K)	: 3000K, 4000K
CRI	: ≥ 90
DIMENSION	: Ø L 85 X 88 MM
CUT-OUT	: Ø 75 MM
LUMENS	: 1200LM
POWERED BY	CREE

12W



12W




PRR CANO 1B

WATTS	: 12W
FINISH	: SAND BLACK + SAND BLACK
CCT(K)	: 3000K, 4000K
CRI	: ≥ 90
DIMENSION	: Ø L 85 X 88 MM
CUT-OUT	: Ø 75 MM
LUMENS	: 1200LM
POWERED BY	CREE




PRR GLADE ELITE 1

WATTS : 8W
FINISH : MATT GREY + WHITE
MATERIAL : ALUMINIUM
BEAM ANGLE : 15° OR 38° OR 60°
CCT(K) : 3000K, 4000K, 5000K
CRI : ≥ 90
DIMENSION : Ø 70 X H 65 MM
CUT-OUT : Ø 60 MM
LUMENS : 840LM
POWERED BY **CREE**




PRR GLADE ELITE 2

WATTS : 12W
FINISH : MATT GREY + WHITE
MATERIAL : ALUMINIUM
BEAM ANGLE : 15° OR 38° OR 60°
CCT(K) : 3000K, 4000K, 5000K
CRI : ≥ 90
DIMENSION : Ø 85 X H 75 MM
CUT-OUT : Ø 75 MM
LUMENS : 1440LM
POWERED BY **CREE**



PRR GLADE ELITE 3

WATTS : 20W
FINISH : MATT GREY + WHITE
MATERIAL : ALUMINIUM
BEAM ANGLE : 15° OR 38° OR 60°
CCT(K) : 3000K, 4000K, 5000K
CRI : ≥ 90
DIMENSION : Ø 95 X H 85 MM
CUT-OUT : Ø 85 MM
LUMENS : 2400LM
POWERED BY **CREE**





PRR OPTICAL 1

WATTS	: 8W
FINISH	: WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 15° OR 38° OR 60°
CCT(K)	: 3000K, 4000K, 5000K
CRI	: ≥ 90
DIMENSION	: Ø 62 X H 85 MM
CUT-OUT	: Ø 55 MM
LUMENS	: 840LM
DRIVER	: FULHAM OR EQUIVALENT
POWERED BY	CREE



PRR OPTICAL 2

WATTS	: 12W
FINISH	: WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 15° OR 38° OR 60°
CCT(K)	: 3000K, 4000K, 5000K
CRI	: ≥ 90
DIMENSION	: Ø 84 X H 100 MM
CUT-OUT	: Ø 75 MM
LUMENS	: 1440LM
DRIVER	: FULHAM OR EQUIVALENT
POWERED BY	CREE



PRR OPTICAL 3

WATTS	: 20W
FINISH	: WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 15° OR 38° OR 60°
CCT(K)	: 3000K, 4000K, 5000K
CRI	: ≥ 90
DIMENSION	: Ø 110 X H 128 MM
CUT-OUT	: Ø 95 MM
LUMENS	: 2440LM
DRIVER	: FULHAM OR EQUIVALENT
POWERED BY	CREE



PRR LUXUS 1

WATTS	: 8W
FINISH	: WHITE
REFLECTOR	: BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 15° OR 38° OR 60°
CCT(K)	: 3000K, 4000K, 5000K
CRI	: ≥ 90
DIMENSION	: Ø 62 X H 86 MM
CUT-OUT	: Ø 55 MM
LUMENS	: 840LM
DRIVER	: FULHAM OR EQUIVALENT
POWERED BY	CREE



PRR LUXUS 2

WATTS	: 12W
FINISH	: WHITE
REFLECTOR	: BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 15° OR 38° OR 60°
CCT(K)	: 3000K, 4000K, 5000K
CRI	: ≥ 90
DIMENSION	: Ø 84 X H 104 MM
CUT-OUT	: Ø 75 MM
LUMENS	: 1440LM
DRIVER	: FULHAM OR EQUIVALENT
POWERED BY	CREE



PRR LUXUS 3

WATTS	: 20W
FINISH	: WHITE
REFLECTOR	: BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 15° OR 38° OR 60°
CCT(K)	: 3000K, 4000K, 5000K
CRI	: ≥ 90
DIMENSION	: Ø 110 X H 127 MM
CUT-OUT	: Ø 95 MM
LUMENS	: 2400LM
DRIVER	: FULHAM OR EQUIVALENT
POWERED BY	CREE



PRR GINI 1A - 1B


WATTS	: 9W
FINISH	: SAND WHITE + BLACK / BLACK + BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 15° OR 36°
CCT(K)	: 3000K, 4000K, 5000K
CRI	: ≥ 90
DIMENSION	: 44 X H 90 MM
CUT-OUT	: Ø 40
LUMENS	: 960LM
POWERED BY	CREE

1A - white | 1B - black



PRR GLASSO

WATTS	: 7W
FINISH	: SAND WHITE + SMOKY GREY
MATERIAL	: ALUMINIUM + GLASS
BEAM ANGLE	: 24°
CCT(K)	: 3000K
CRI	: ≥ 90
DIMENSION	: 42 X H 103 MM
GLASS DIMENSION	: 30 X 41 MM
CUT-OUT	: Ø 35 MM
LUMENS	: 630LM



PRR SPIN 1 - 2

WATTS	: 3W / 7W
FINISH	: BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 20° TO 55° (ADJUSTABLE)
CCT(K)	: 3000K, 4000K
CRI	: ≥ 90
DIMENSION	: 55 X H 70 MM
CUT-OUT	: 50 MM
LUMENS	: 270LM
POWERED BY	: OSRAM OSLON / BRIDGELUX

1 - 3W | 2 - 7W




PRR MOIST 1A

WATTS	: 12W
MATERIAL	: SAND WHITE + BLACK
BEAM ANGLE	: 36°
CCT (K)	: 3000K, 4000K
CRI	: ≥ 90
IP RATING	: IP44
DIMENSION	: Ø 82 X H 62 MM
CUTOUT	: Ø 75 MM
LUMENS	: 960LM
POWERED BY	: CREE

PRR TURBO DIM

WATTS	: 9W/12W
MATERIAL	: ALUMINIUM DIE-CAST
FINISH	: SAND WHITE
CRI	: RA>90
BEAM ANGLE	: 32°
DIMMING	: PHASE CUT
CCT (K)	: 3000K, 4000K
DIMENSION	: 83 X H 74 MM
CUTOUT	: Ø 68 X H 90 MM
IP RATING	: IP 44
POWERED BY	: CREE



Ø68xH90





5W



PRR OPTIC 1

WATTS	: 5W
MATERIAL	: ALUMINIUM
INPUT	: AC170-250V, 50-60HZ
CRI	: RA>92
BEAM ANGLE	: 25°
LUMEN	: 450LM
CCT	: 3000K, 4000K, 5000K
DIMENSION	: 82 X H 85MM
CUTOUT	: Ø75MM
POWERED BY	: CITIZEN

10W



PRR OPTIC 2

WATTS	: 10W
MATERIAL	: ALUMINIUM
INPUT	: AC170-250V, 50-60HZ
CRI	: RA>92
BEAM ANGLE	: 25°
LUMEN	: 900LM
CCT	: 3000K, 4000K, 5000K
DIMENSION	: 95 X H 111MM
CUTOUT	: Ø85MM
POWERED BY	: CITIZEN

15W




PRR OPTIC 3

WATTS	: 15W
MATERIAL	: ALUMINIUM
INPUT	: AC170-250V, 50-60HZ
CRI	: RA>92
BEAM ANGLE	: 25°
LUMEN	: 1350LM
CCT	: 3000K, 4000K, 5000K
DIMENSION	: 120 X H 144MM
CUTOUT	: Ø105MM
POWERED BY	: CITIZEN





PRR CUP 1

WATTS	: 10W
MATERIAL	: ALUMINIUM
INPUT	: AC170-250V, 50-60Hz
BEAM ANGLE	: 38°
CCT(K)	: 3000K, 4000K, 5000K
CRI	: RA>92
DIMENSION	: 120 X H 85 MM
CUT-OUT	: Ø 110MM
LUMENS	: 900LM
POWERED BY	: CITIZEN



PRR CUP 2


WATTS	: 20W
MATERIAL	: ALUMINIUM
INPUT	: AC170-250V, 50-60Hz
BEAM ANGLE	: 38°
CCT(K)	: 3000K, 4000K, 5000K
CRI	: RA>92
DIMENSION	: 134 X H 85 MM
CUT-OUT	: Ø 120MM
LUMENS	: 1800LM
POWERED BY	: CITIZEN





PRR HALO SENIOR

WATTS	: 24W
MATERIAL	: ALUMINIUM DIE-CAST
FINISH	: SAND WHITE
BEAM ANGLE	: 38°
CCT(K)	: 3000K, 4000K
CRI	: RA>90
DIMENSION	: 140 X H 70 MM
CUT-OUT	: Ø 127 X 100 MM
LUMENS	: 2450LM
POWERED BY	: BRIDGELUX



PRR DANY TINY

WATTS	: 9W + 3W
MATERIAL	: ALUMINIUM DIE CAST
FINISH	: SAND WHITE
CRI	: RA>90
BEAM ANGLE	: 24°
CCT	: 3000K, 4000K
DIMENSION	: 106 X H 103 MM
LUMEN	: 850 LM
CUT-OUT	: Ø 89 MM
POWERED BY	: BRIDGELUX



PRR DANNY

WATTS	: 24W
MATERIAL	: ALUMINIUM DIE CAST
FINISH	: SAND WHITE
CRI	: RA>90
BEAM ANGLE	: 30°
CCT	: 3000K, 4000K
DIMENSION	: 137 X H 140 MM
LUMEN	: 2450 LM
CUT-OUT	: Ø 127 MM
POWERED BY	: BRIDGELUX



PRR MABEL 1B

WATTS	: 6W
MATERIAL	: ALUMINIUM
FINISH	: SAND BLACK
CRI	: 90
BEAM ANGLE	: 24°
CCT	: 3000K, 4000K
DIMENSION	: L 85 X W 35 X H 65 MM
LUMEN	: 500 LM
POWERED BY	: OSRAM

PRR MABEL 2B

WATTS	: 10W
MATERIAL	: ALUMINIUM
FINISH	: SAND BLACK
CRI	: 90
BEAM ANGLE	: 24°
CCT	: 3000K, 4000K
DIMENSION	: L 138 X W 35 X H 65 MM
LUMEN	: 800 LM
POWERED BY	: OSRAM







PRR NARIO 1A - 1B - 1C

WATTS	: 8W
IP RATING	: IP 44
MATERIAL	: ALUMINIUM
FINISH	: SAND WHITE, SAND BLACK, BRASS & BLACK INNER
CRI	: 90
BEAM ANGLE	: 36°
CCT	: 3000K, 4000K
DIMENSION	: Ø 94 X H 99 MM
LUMEN	: 1190 LM
POWERED BY	: CREE

1A - SAND WHITE | 1B - SAND BLACK | 1C - BRASS

PRR NARIO 2A - 2B - 2C

WATTS	: 15W
IP RATING	: IP44
MATERIAL	: ALUMINIUM
FINISH	: SAND WHITE, SAND BLACK, BRASS & BLACK INNER
CRI	: 90
BEAM ANGLE	: 36° / 55°
CCT	: 3000K, 4000K
DIMENSION	: Ø 94 X H 115 MM
LUMEN	: 1190 LM
POWERED BY	: CREE



2A - SAND WHITE | 2B - SAND BLACK | 2C - BRASS



PRR UNICO 1B

WATTS	: 7W
MATERIAL	: ALUMINIUM
FINISH	: SAND BLACK
CRI	: 90
BEAM ANGLE	: 32°
CCT	: 3000K, 4000K
DIMENSION	: Ø 35 X (140X1) X H 395 MM
LUMEN	: 630 LM
POWERED BY	: OSRAM

PRR UNICO 2B

WATTS	: 2X7W
MATERIAL	: ALUMINIUM
FINISH	: SAND BLACK
CRI	: 90
BEAM ANGLE	: 32°
CCT	: 3000K, 4000K
DIMENSION	: Ø 35 X (140X2) X H 430 MM
LUMEN	: 1260 LM
POWERED BY	: OSRAM



20W



PRR JACK 1B

WATTS	: 20W
MATERIAL	: ALUMINIUM
FINISH	: BLACK & BLACK INNER
CCT(K)	: 3000K
DIMENSION	: 340 X 113 X H 26 MM
CRI	: 90
BEAM ANGLE	: 36°
LUMENS	: 1800 LM
POWERED BY	: CREE

7W



PRR FALL 1B

WATTS	: 7W
MATERIAL	: ALUMINIUM
FINISH	: SAND BLACK
CRI	: 90
BEAM ANGLE	: 36°
LUMENS	: 630LM
CCT	: 3000K, 4000K
DIMENSION	: Ø 64 X H 196 MM
POWERED BY	: CREE

7W



PRR FALL 2B

WATTS	: 7W
MATERIAL	: ALUMINIUM
FINISH	: SAND BLACK
CRI	: 90
BEAM ANGLE	: 36°
LUMENS	: 630LM
CCT	: 3000K, 4000K
DIMENSION	: Ø 64 X H 326 MM
POWERED BY	: CREE




PRR LENS

WATTS	: 10W
MATERIAL	: ALUMINIUM
FINISH	: SAND BLACK
CRI	: 90
BEAM ANGLE	: 20° X 35°
CCT(K)	: 3000K
DIMENSION	: Ø 45 X H 160 MM
LUMENS	: 900 LM
POWERED BY	: CREE



PRR IDO 1A/1B

WATTS	: 12W
MATERIAL	: ALUMINIUM DIE-CAST
FINISH	: WHITE / BLACK
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K
CRI	: RA>90
DIMENSION	: 102 X H 84 MM
LUMENS	: 1656LM
ADJUSTABLE ANGLE	: LAMP HEAD 0~45° / 350°
DIMMING	: 350 mA TRIAC DIMMABLE
POWERED BY	bridgelux.



1A - white | 1B - black

10W



PRR REGENT 1B

WATTS	: 3W (UP) + 7W (DOWN)
MATERIAL	: ALUMINIUM
FINISH	: SAND BLACK
CRI	: 90
BEAM ANGLE	: 36°
LUMEN	: 630 LM
CCT	: 3000K, 4000K
DIMENSION	: Ø 113 X 90 MM
POWERED BY	: EPISTAR

18W



PRR REGENT 2B

WATTS	: 3W (UP) + 15W (DOWN)
MATERIAL	: ALUMINIUM
FINISH	: SAND BLACK
CRI	: 90
BEAM ANGLE	: 36°
LUMEN	: 1350 LM
CCT	: 3000K, 4000K
DIMENSION	: Ø 138 X 90 MM
POWERED BY	: EPISTAR

5W



PRR PRACO 1A - 1B

WATTS	: 5W
MATERIAL	: ALUMINIUM
CRI	: 90
BEAM ANGLE	: 65° + 26° ∠ 18°
LUMEN	: 310 LM
CCT	: 3000K, 4000K
DIMENSION	: Ø 56 X 56 X 70 MM
POWERED BY	: BRIDGELUX

1A - sand white + black | 1B - sand black + black

10W



PRR PRACO 2A - 2B

WATTS	: 2 x 5W
MATERIAL	: ALUMINIUM
CRI	: 90
BEAM ANGLE	: 65° + 26° ∠ 18°
LUMEN	: 690 LM
CCT	: 3000K, 4000K
DIMENSION	: Ø 99 X 56 X 70 MM
POWERED BY	: BRIDGELUX

2A - sand white + black | 2B - sand black + black

20W



PRR STELLA 1B

WATTS	: 20 W
MATERIAL	: ALUMINIUM + PC
FINISH	: SAND BLACK
BEAM ANGLE (SPOT)	: 110°
CCT(K)	: 3000K, 4000K
CRI	: 90
DIMENSION	: Ø 210 X 85 MM
LUMEN	: 1750LM
POWERED BY	: OSRAM



40W



PRR LORENZO 1B

WATTS	: 40W
MATERIAL	: ALUMINIUM + PC
FINISH	: SAND BLACK + GOLD
BEAM ANGLE (SPOT)	: 110°
CCT(K)	: 3000K, 4000K
CRI	: 90
DIMENSION	: Ø 400 X 85 MM
LUMEN	: 4200LM
DIMMING	: TRIAC DIMMABLE
POWERED BY	: EVERLITE

60W





PRR LORENZO 2B

WATTS	: 60W
MATERIAL	: ALUMINIUM + PC
FINISH	: SAND BLACK + GOLD
BEAM ANGLE (SPOT)	: 110°
CCT(K)	: 3000K, 4000K
CRI	: 90
DIMENSION	: Ø 600 X 85 MM
LUMEN	: 7200LM
DIMMING	: TRIAC DIMMABLE
POWERED BY	: EVERLITE



PRR AURA

WATTS	: 33W SMD & 7W SPOT
MATERIAL	: ALUMINIUM & ACRYLIC
FINISH	: BLACK + BLACK SPOT
BEAM ANGLE (SPOT)	: 36°
CCT(K)	: SMD 4000K & SPOT 3000K
CRI	: RA>90
DIMENSION	: 400 X H 70 MM
LUMENS	: 3200LM
POWERED BY	: CITIZEN

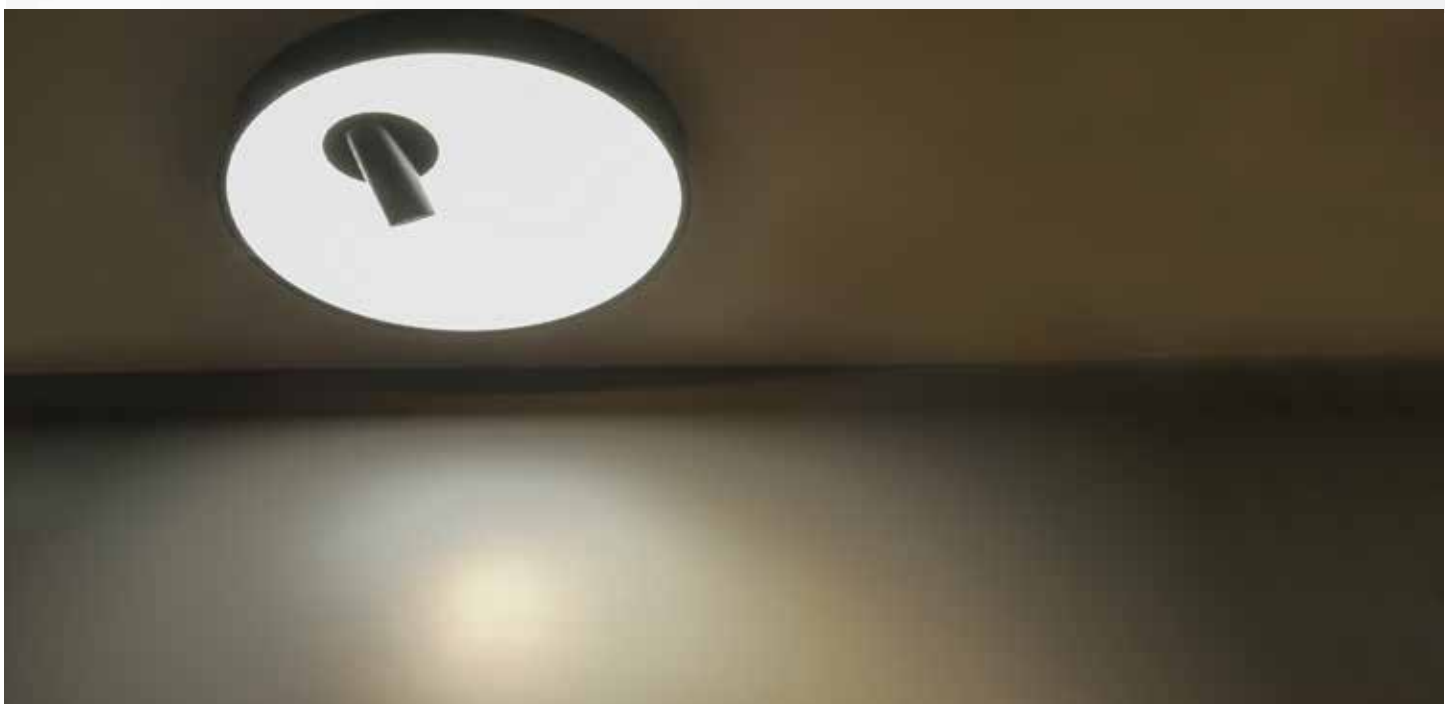

PRIME INDOOR

Prime from Prisha is what is commonly referred to as an architectural range that performs both functionally as well as one that uses it's fixturing to maximise lighting output aesthetics.

*Used here is Prisha PRE
Spout 2B*

Location: DressCircle
Props: Drape Shoppe





PRO VEGA 1A - 1B

WATTS	: 12W
FINISH	: WHITE/BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 110°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 80
DIMENSION	: 119 X H 53 MM
CUTOUT	: Ø 110 MM
LUMENS	: 1080LM
DRIVER	: PRISHA OR EQUIVALENT
POWERED BY	bridgelux.

1A - white | 1B - black



CCT adjustable & dimmable



PRO VEGA 2A - 2B

WATTS	: 18W
FINISH	: WHITE/BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 110°
CCT(K)	: 3000K, 4000K, 5000K 6000K
CRI	: ≥ 80
DIMENSION	: 154 X H 53 MM
CUTOUT	: Ø 146 MM
LUMENS	: 1620LM
DRIVER	: PRISHA OR EQUIVALENT
POWERED BY	bridgelux.

2A - white | 2B - black



CCT adjustable & dimmable



PRE NEO 1A - 1B

WATTS	: 10W
FINISH	: WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 110°
CCT(K)	: 4000K , 6000K
CRI	: ≥ 80
DIMENSION	: 90 X H 58 MM
CUTOUT	: Ø 86 MM
LUMENS	: 1000LM
DRIVER	: PRISHA ISOLATED OR EQUIVALENT
POWERED BY	bridgelux.

WHITE & BLACK BOTH AVAILABLE



PRE NEO 2A - 2B

WATTS	: 16W
FINISH	: WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 110°
CCT(K)	: 4000K , 6000K
CRI	: ≥ 80
DIMENSION	: 100 X H 58 MM
CUTOUT	: 95 MM
LUMENS	: 1600LM
DRIVER	: PRISHA ISOLATED OR EQUIVALENT
POWERED BY	bridgelux.

WHITE & BLACK BOTH AVAILABLE



PRE COTT 1A

WATTS	: 8W
FINISH	: SAND WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 110°
CCT(K)	: 3000K, 4000K , 6000K
CRI	: ≥ 80
DIMENSION	: 88 X H 23 MM
CUTOUT	: Ø 75 MM
LUMENS	: 720LM
POWERED BY	EPISTAR



PRE COTT 2A

WATTS	: 15W
FINISH	: SAND WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 110°
CCT(K)	: 3000K, 4000K , 6000K
CRI	: ≥ 80
DIMENSION	: 145 x H 23MM
CUTOUT	: Ø 130 MM
LUMENS	: 1350LM
POWERED BY	EPISTAR



PRE COTT 3A

WATTS	: 22W
FINISH	: SAND WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 110°
CCT(K)	: 3000K, 4000K , 6000K
CRI	: ≥ 80
DIMENSION	: 170 X H 23 MM
CUTOUT	: Ø 155 MM
LUMENS	: 1980LM
POWERED BY	EPISTAR



PRE COTT 1B

WATTS	: 8W
FINISH	: SAND WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 110°
CCT(K)	: 3000K, 4000K , 6000K
CRI	: ≥ 80
DIMENSION	: 88 X 88 X H 23 MM
CUTOUT	: 75 X 75 MM
LUMENS	: 720LM
POWERED BY	EPISTAR



PRE COTT 2B

WATTS	: 15W
FINISH	: SAND WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 110°
CCT(K)	: 3000K, 4000K , 6000K
CRI	: ≥ 80
DIMENSION	: 145 X 145 X H 23 MM
CUTOUT	: 130 X 130 MM
LUMENS	: 1350LM
POWERED BY	EPISTAR



PRE COTT 3B

WATTS	: 22W
FINISH	: SAND WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 110°
CCT(K)	: 3000K, 4000K , 6000K
CRI	: ≥ 80
DIMENSION	: 170 X 170 X H 23 MM
CUTOUT	: 155 X 155 MM
LUMENS	: 1980LM
POWERED BY	EPISTAR



PRE COTT 1C

WATTS	: 8W
FINISH	: SAND WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 110°
CCT(K)	: 3000K, 4000K , 6000K
CRI	: ≥ 80
DIMENSION	: 88 X H 30 MM
LUMENS	: 720LM
POWERED BY	EPISTAR



PRE COTT 2C

WATTS	: 15W
FINISH	: SAND WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 110°
CCT(K)	: 3000K, 4000K , 6000K
CRI	: ≥ 80
DIMENSION	: 145 X H 30 MM
LUMENS	: 1350LM
POWERED BY	EPISTAR

22
W



PRE COTT 3C

WATTS	: 22W
FINISH	: SAND WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 110°
CCT(K)	: 3000K, 4000K , 6000K
CRI	: ≥ 80
DIMENSION	: 170 X H 30MM
LUMENS	: 1980LM
POWERED BY	EPISTAR

08
W



PRE COTT 1D

WATTS	: 8W
FINISH	: SAND WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 110°
CCT(K)	: 3000K, 4000K , 6000K
CRI	: ≥ 80
DIMENSION	: 88 X 88 X H 30MM
LUMENS	: 720LM
POWERED BY	EPISTAR

15
W



PRE COTT 2D

WATTS	: 15W
FINISH	: SAND WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 110°
CCT(K)	: 3000K, 4000K , 6000K
CRI	: ≥ 80
DIMENSION	: 145 X 145 X H 30MM
LUMENS	: 1350LM
POWERED BY	EPISTAR



PRE COTT 3D

WATTS	: 22W
FINISH	: SAND WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 110°
CCT(K)	: 3000K, 4000K, 6000K
CRI	: ≥ 80
DIMENSION	: 170 X 170 X H 30 MM
LUMENS	: 1980LM
POWERED BY	EPISTAR



PRE TUBO 1A - 1B

WATTS	: 8W
FINISH & MATERIAL	: SAND WHITE / BLACK
BEAM ANGLE	: 120°
CCT(K)	: 4000K, 6000K
CRI	: ≥ 80
DIMENSION	: 100 X H 50 MM
LUMENS	: 720LM
POWERED BY	bridgelux.

1A - white | 1B - black



PRE TUBO 2A - 2B

WATTS	: 15W
FINISH & MATERIAL	: SAND WHITE/ BLACK
BEAM ANGLE	: 120°
CCT(K)	: 4000K, 6000K
CRI	: ≥ 80
DIMENSION	: 125 X H 50 MM
LUMENS	: 1350LM
POWERED BY	bridgelux.

2A - white | 2B - black



PRE LEAD 1A - 1B (SUSPENDED)

WATTS	: 18W
FINISH & MATERIAL	: MATT WHITE / BLACK
DIFFUSER	: PREMIUM HIGH TRANSMISSION PC
BEAM ANGLE	: 110°
CCT(K)	: 3000K, 4000K, 6000K
CRI	: ≥ 80
DIMENSION	: 590 X 50 X H 70 MM
DRIVER	: PRISHA ISOLATED
POWERED BY	: 

1A - white | 1B - black



PRE LEAD 1C (SUSPENDED)

WATTS	: 18W
FINISH & MATERIAL	: WOODEN
DIFFUSER	: PREMIUM HIGH TRANSMISSION PC
BEAM ANGLE	: 110°
CCT(K)	: 3000K, 4000K, 6000K
CRI	: ≥ 80
DIMENSION	: 590 X 50 X H 70 MM
DRIVER	: PRISHA ISOLATED
POWERED BY	: 



PRE LEAD 2A - 2B (SUSPENDED)

WATTS	: 36W
FINISH & MATERIAL	: MATT WHITE / BLACK
DIFFUSER	: PREMIUM HIGH TRANSMISSION PC
BEAM ANGLE	: 110°
CCT(K)	: 3000K, 4000K, 6000K
CRI	: ≥ 80
DIMENSION	: 1180 X 50 X H 70 MM
DRIVER	: PRISHA ISOLATED
POWERED BY	: 

2A - white | 2B - black



PRE LEAD 2C (SUSPENDED)

WATTS	: 36W
FINISH & MATERIAL	: WOODEN
DIFFUSER	: PREMIUM HIGH TRANSMISSION PC
BEAM ANGLE	: 110°
CCT(K)	: 3000K, 4000K, 6000K
CRI	: ≥ 80
DIMENSION	: 1180 X 50 X H 70 MM
DRIVER	: PRISHA ISOLATED
POWERED BY	: 



PRE COM 1A - 1B

WATTS	: 3W
FINISH	: MATT WHITE / BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 6000K
CRI	: ≥ 85
DIMENSION	: 37 X H 26 MM
CUTOUT	: Ø 32 MM
LUMENS	: 270LM
POWERED BY	bridgelux.

1A - white | 1B - black



PRE COSTA 1

WATTS	: 3W
FINISH	: MATT WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 6000K
CRI	: ≥ 85
DIMENSION	: 65 X H 40 MM
CUTOUT	: Ø 55 MM
LUMENS	: 270LM
POWERED BY	bridgelux.



PRE COSTA 2

WATTS	: 7W
FINISH	: MATT WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K 6000K
CRI	: ≥ 85
DIMENSION	: 85 X H 60 MM
CUTOUT	: Ø 75 MM
LUMENS	: 630LM
POWERED BY	bridgelux.



CCT adjustable & dimmable



PRE COSTA 3

WATTS	: 12W
FINISH	: MATT WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K 6000K
CRI	: ≥ 85
DIMENSION	: 108 X H 68 MM
CUTOUT	: Ø 95 MM
LUMENS	: 1080LM
POWERED BY	bridgelux.



CCT adjustable & dimmable



PRE COSTA 4

WATTS	: 18W
FINISH	: MATT WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K 6000K
CRI	: ≥ 85
DIMENSION	: 128 X H 80 MM
CUTOUT	: Ø 116 MM
LUMENS	: 1620LM
POWERED BY	bridgelux.



CCT adjustable & dimmable



PRE COSTA 5

WATTS	: 24W
FINISH	: MATT WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K 6000K
CRI	: ≥ 85
DIMENSION	: 136 X H 80 MM
CUTOUT	: Ø 120 MM
LUMENS	: 2160LM
POWERED BY	bridgelux.



PRE DIVINE 1

WATTS	: 7W
FINISH	: MATT WHITE WITH GREY
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 60 X H 64 MM
CUTOUT	: Ø 52 MM
LUMENS	: 630LM
POWER FACTOR	: ≥ 0.95
POWERED BY	bridgelux.



CCT adjustable & dimmable



PRE DIVINE 2

WATTS	: 12W
FINISH	: MATT WHITE WITH GREY
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 82 X H 80 MM
CUTOUT	: Ø 75 MM
LUMENS	: 1080LM
POWER FACTOR	: ≥ 0.95
POWERED BY	bridgelux.



CCT adjustable & dimmable



PRE DIVINE 3

WATTS	: 18W
FINISH	: MATT WHITE WITH GREY
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 95 X H 100 MM
CUTOUT	: Ø 87 MM
LUMENS	: 1620LM
POWER FACTOR	: ≥ 0.95
POWERED BY	bridgelux.



CCT adjustable & dimmable



PRE DIVITE 1

WATTS	: 7W
FINISH	: MATT WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 60 X H 64 MM
CUTOUT	: Ø 52 MM
LUMENS	: 630LM
POWERED BY	bridgelux.



CCT adjustable & dimmable



PRE DIVITE 2

WATTS	: 12W
FINISH	: MATT WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 82 X H 80 MM
CUTOUT	: Ø 75 MM
LUMENS	: 1080LM
POWERED BY	bridgelux.



CCT adjustable & dimmable



PRE DIVITE 3

WATTS	: 18W
FINISH	: MATT WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 95 X H 100 MM
CUTOUT	: Ø 87 MM
LUMENS	: 1620LM
POWERED BY	bridgelux.



CCT adjustable & dimmable

07
W



PRE DIVITE 1B

WATTS	: 7W
FINISH	: MATT BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 60 X H 64 MM
CUTOUT	: Ø 52 MM
LUMENS	: 630LM
POWERED BY	bridgelux.



CCT adjustable & dimmable

12
W



PRE DIVITE 2B

WATTS	: 12W
FINISH	: MATT BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 82 X H 80 MM
CUTOUT	: Ø 75 MM
LUMENS	: 1080LM
POWERED BY	bridgelux.



CCT adjustable & dimmable

18
W



PRE DIVITE 3B

WATTS	: 18W
FINISH	: MATT BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 95 X H 100 MM
CUTOUT	: Ø 87 MM
LUMENS	: 1620LM
POWERED BY	bridgelux.



CCT adjustable & dimmable



PRE CODE 1A

WATTS	: 12W
FINISH	: SAND WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 60 X H 67 MM
CUTOUT	: Ø 52 MM
LUMENS	: 1080LM
POWERED BY	bridgelux.



CCT adjustable & dimmable



PRE CODE 1B

WATTS	: 12W
FINISH	: SAND BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 60 X H 67 MM
CUTOUT	: Ø 52 MM
LUMENS	: 1080LM
POWERED BY	bridgelux.



CCT adjustable & dimmable



PRE CODE 1C

WATTS	: 12W
FINISH	: GUN BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 60 X H 67 MM
CUTOUT	: Ø 52 MM
LUMENS	: 1080LM
POWERED BY	bridgelux.



CCT adjustable & dimmable




PRE CODE 1D

WATTS	: 12W
FINISH	: ROSE GOLD
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 60 X H 67 MM
CUTOUT	: Ø 52 MM
LUMENS	: 1080LM
POWERED BY	bridgelux.



CCT adjustable & dimmable

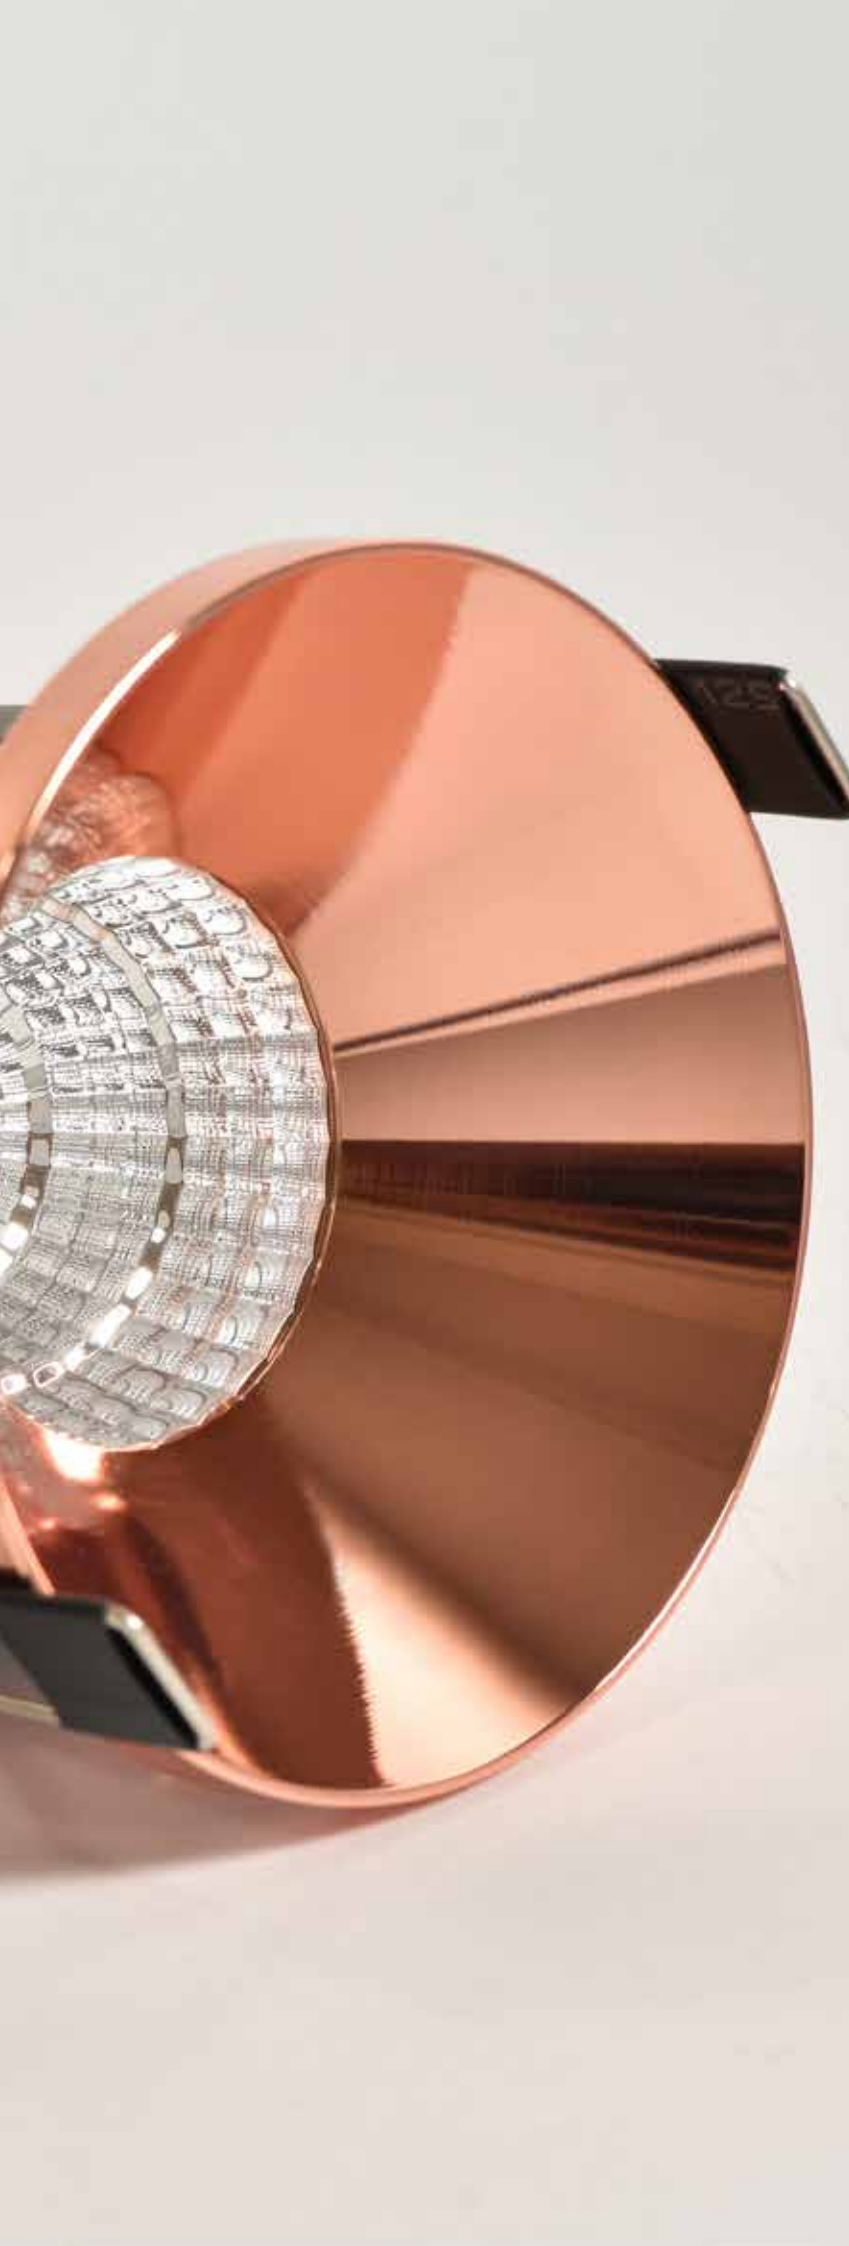

07
W



PRE COST 1

WATTS	: 7W
FINISH	: MATT WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 59 X H 60 MM
CUTOUT	: Ø 52 MM
LUMENS	: 630LM
POWERED BY	bridgelux.



CCT adjustable & dimmable

12
W



PRE COST 2

WATTS	: 12W
FINISH	: MATT WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 82 X H 71 MM
CUTOUT	: Ø 72 MM
LUMENS	: 1080LM
POWERED BY	bridgelux.



CCT adjustable & dimmable

18
W



PRE COST 3

WATTS	: 18W
FINISH	: MATT WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 98 X H 86 MM
CUTOUT	: Ø 90 MM
LUMENS	: 1620LM
POWERED BY	bridgelux.



CCT adjustable & dimmable

30
W



PRE COST 4

WATTS	: 30W
FINISH	: MATT WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 118 X H 125 MM
CUTOUT	: Ø 106 MM
LUMENS	: 2700LM
POWERED BY	bridgelux.



CCT adjustable & dimmable



PRE COST 1B

WATTS : 7W
FINISH : MATT BLACK
MATERIAL : ALUMINIUM
BEAM ANGLE : 36°
CCT(K) : 3000K, 4000K, 5000K, 6000K
CRI : ≥ 85
DIMENSION : 59 X H 60 MM
CUTOUT : Ø 52 MM
LUMENS : 630LM
POWERED BY

PRE COST 2B

WATTS : 12W
FINISH : MATT BLACK
MATERIAL : ALUMINIUM
BEAM ANGLE : 36°
CCT(K) : 3000K, 4000K, 5000K, 6000K
CRI : ≥ 85
DIMENSION : 82 X H 71 MM
CUTOUT : Ø 72 MM
LUMENS : 1080LM
POWERED BY

PRE COST 3B

WATTS : 18W
FINISH : MATT BLACK
MATERIAL : ALUMINIUM
BEAM ANGLE : 36°
CCT(K) : 3000K, 4000K, 5000K, 6000K
CRI : ≥ 85
DIMENSION : 98 X H 86 MM
CUTOUT : Ø 90 MM
LUMENS : 1620LM
POWERED BY



CCT adjustable & dimmable



CCT adjustable & dimmable



CCT adjustable & dimmable



PRE GOLD 1

WATTS : 7W
FINISH : ROSE GOLD
MATERIAL : ALUMINIUM
BEAM ANGLE : 36°
CCT(K) : 3000K, 4000K, 5000K, 6000K
CRI : ≥ 85
DIMENSION : 59 X H 60 MM
CUTOUT : Ø 52 MM
LUMENS : 630LM
POWERED BY 



PRE GOLD 2

WATTS : 12W
FINISH : ROSE GOLD
MATERIAL : ALUMINIUM
BEAM ANGLE : 36°
CCT(K) : 3000K, 4000K, 5000K, 6000K
CRI : ≥ 85
DIMENSION : 82 X H 71 MM
CUTOUT : Ø 72 MM
LUMENS : 1080LM
POWERED BY 



PRE GOLD 3

WATTS : 18W
FINISH : ROSE GOLD
MATERIAL : ALUMINIUM
BEAM ANGLE : 36°
CCT(K) : 3000K, 4000K, 5000K, 6000K
CRI : ≥ 85
DIMENSION : 98 X H 86 MM
CUTOUT : Ø 90 MM
LUMENS : 1620LM
POWERED BY 



CCT adjustable & dimmable



CCT adjustable & dimmable



CCT adjustable & dimmable



PRE COIN 1

WATTS	: 7W
FINISH	: MATT WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 70 X H 53 MM
CUTOUT	: Ø 60 MM
LUMENS	: 630LM
POWERED BY	bridgelux.



CCT adjustable & dimmable



PRE COIN 2

WATTS	: 12W
FINISH	: MATT WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 92 X H 75 MM
CUTOUT	: Ø 75 MM
LUMENS	: 1080LM
POWERED BY	bridgelux.



CCT adjustable & dimmable



PRE COIN 3

WATTS	: 18W
FINISH	: MATT WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 110 X H 76 MM
CUTOUT	: Ø 80 MM
LUMENS	: 1620LM
POWERED BY	bridgelux.



CCT adjustable & dimmable



PRE COLI

WATTS	: 12W
FINISH	: MATT WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 6000K
CRI	: ≥ 85
DIMENSION	: 100 X H 74 MM
CUTOUT	: Ø 90 MM
LUMENS	: 1080LM
POWERED BY	bridgelux.

07
W



PRE PURE

WATT	: 7W
FINISH	: MATT BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 80
DIMENSION	: 60 X H 52 MM
CUTOUT	: Ø 50 MM
LUMENS	: 630LM
POWERED BY	bridgelux.



CCT adjustable & dimmable





PRE BASILIO 1

WATTS	: 7W
FINISH	: MATT WHITE & BLACK
MATERIAL	: ALUMINIUM
REFLECTOR	: CHROME, CHAMPAGNE, GOLD, COPPER, WHITE, BLACK
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 54 X H 75 MM
LUMENS	: 630LM
POWERED BY	



PRE BASILIO 2

WATTS	: 12W
FINISH	: MATT WHITE & BLACK
MATERIAL	: ALUMINIUM
REFLECTOR	: CHROME, CHAMPAGNE, GOLD, COPPER, WHITE, BLACK
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 76 X H 100 MM
LUMENS	: 1080LM
POWERED BY	




PRE BASILIO 3

WATTS	: 18W
FINISH	: MATT WHITE & BLACK
MATERIAL	: ALUMINIUM
REFLECTOR	: CHROME, CHAMPAGNE, GOLD, COPPER, WHITE, BLACK
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 94 X H 120 MM
LUMENS	: 1620LM
POWERED BY	




PRR GAMA

WATTS	: 12W
MATERIAL	: ALUMINIUM
FINISH	: SAND WHITE / BLACK
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K & 5000K
CRI	: RA>80
DIMENSION	: 76 X 76 X H 100 MM
LUMENS	: 1190LM



PRR FONTANA BIG


WATTS	: 18W
MATERIAL	: ALUMINIUM DIE-CAST
FINISH	: SAND WHITE
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K, 5000K
CRI	: RA>90
DIMENSION	: 134 X H 121 MM
LUMENS	: 1790LM





PRQ 2

WATTS	: 12W
MATERIAL	: ALUMINIUM
FINISH	: SAND WHITE
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K & 5000K
CRI	: RA>80
DIMENSION	: 76 X 76 X H 163 MM
LUMENS	: 1190LM
ADJUSTABLE ANGLE	: LAMP HEAD 80°



PRQ 3

WATTS	: 12W
MATERIAL	: ALUMINIUM
FINISH	: SAND WHITE
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K & 5000K
CRI	: RA>80
DIMENSION	: 85 X H 120 MM
LUMENS	: 1190LM
ADJUSTABLE ANGLE	: ROTATES 360° HEAD ADJUST 90°



PRQ INSTA 1A/1B

WATTS	: 12W
MATERIAL	: ALUMINIUM
FINISH	: SAND WHITE / SAND BLACK
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K, 5000K
CRI	: RA>90
DIMENSION	: Ø 58 X 160MM X BASE H 137 MM
LUMENS	: 1190LM





PRE PLUTO 1

WATTS	: 7W
FINISH	: IVORY WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 80
DIMENSION	: 65 X H 52 MM
CUTOUT	: Ø 55 MM
LUMENS	: 630LM
POWERED BY	bridgelux.



CCT adjustable & dimmable



PRE PLUTO 2

WATT	: 12W
FINISH	: IVORY WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 80
DIMENSION	: 83 X H 61 MM
CUTOUT	: Ø 75 MM
LUMENS	: 1080LM
POWERED BY	bridgelux.



CCT adjustable & dimmable



PRE PASSION 1

WATTS	: 7W
FINISH	: IVORY WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 80
DIMENSION	: 65 X H 46 MM
CUTOUT	: Ø 55 MM
LUMENS	: 630LM
POWERED BY	bridgelux.



CCT adjustable & dimmable



PRE PASSION 2

WATTS	: 12W
FINISH	: IVORY WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 80
DIMENSION	: 84 X H 60 MM
CUTOUT	: Ø 75 MM
LUMENS	: 1080LM
POWERED BY	bridgelux.



CCT adjustable & dimmable



PRE PLATINA 1

WATTS	: 7W
FINISH	: IVORY WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 80
DIMENSION	: 65 X H 55 MM
CUTOUT	: Ø 55 MM
LUMENS	: 630LM
POWERED BY	bridgelux.



CCT adjustable & dimmable



PRE PLATINA 2

WATTS	: 12W
FINISH	: IVORY WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 80
DIMENSION	: 80 X H 69 MM
CUTOUT	: Ø 75 MM
LUMENS	: 1080LM
POWERED BY	bridgelux.



CCT adjustable & dimmable



PRE COLOUR 1A - 1B

WATTS	: 5W
FINISH	: ROSE GOLD / SATIN BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 30°
CCT(K)	: 3000K, 4000K
CRI	: ≥ 80
DIMENSION	: 46 X H 60 MM
CUTOUT	: Ø 40 MM
LUMENS	: 450LM
POWERED BY	EPISTAR

1A - rose gold | 1B - satin black



PRE COLOUR 2A - 2B

WATTS	: 12W
FINISH	: ROSE GOLD / SATIN BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 30°
CCT(K)	: 3000K, 4000K
CRI	: ≥ 80
DIMENSION	: 60 X H 83 MM
CUTOUT	: Ø 55 MM
LUMENS	: 1080LM
POWERED BY	EPISTAR

2A - rose gold | 2B - satin black



PRE COMPASS 1

WATTS	: 9W
FINISH	: WHITE BODY - BLACK REFLECTOR
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 30°
CCT(K)	: 3000K, 4000K
CRI	: ≥ 80
DIMENSION	: 67 X H 65 MM
CUTOUT	: Ø 55 MM
LUMENS	: 810LM
POWERED BY	bridgelux.



PRE COMPASS 2

WATTS	: 9W
FINISH	: WHITE BODY - BLACK REFLECTOR
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 30°
CCT(K)	: 3000K, 4000K
CRI	: ≥ 80
DIMENSION	: 67 X 67 X H 65 MM
CUTOUT	: 55 X 55 MM
LUMENS	: 810LM
POWERED BY	bridgelux.



PRE COMPASS 3

WATTS	: 9W X 3 = 27W
FINISH	: WHITE BODY - BLACK REFLECTOR
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 30°
CCT(K)	: 3000K, 4000K
CRI	: ≥ 80
DIMENSION	: 159 X 67 X H 60 MM
CUTOUT	: 150 X 60 MM
LUMENS	: 2160LM
POWERED BY	bridgelux.



PRE COMPASS 4



WATTS	: 9W X 5 = 45W
FINISH	: WHITE BODY - BLACK REFLECTOR
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 30°
CCT(K)	: 3000K, 4000K
CRI	: ≥ 80
DIMENSION	: 253 X 67 X H 65 MM
CUTOUT	: 245 X 60 MM
LUMENS	: 3600LM
POWERED BY	bridgelux.

07
W



PRQ 14 (ROUND)

WATTS	: 7W
FINISH	: SAND WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K, 5000K
CRI	: RA>80
DIMENSION	: 82 X H 92 MM
CUT-OUT	: Ø 75MM
LUMENS	: 630LM





12
W



PRQ 14 PLUS (ROUND)

WATTS	: 12W
FINISH	: SAND WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K, 5000K
CRI	: RA>80
DIMENSION	: 108 X H 108 MM
CUT-OUT	: Ø 100MM
LUMENS	: 1190LM



07
W



PRQ 13

WATTS	: 7W
FINISH	: SAND WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K, 5000K
CRI	: RA>80
DIMENSION	: 84 X H 90 MM
CUT-OUT	: Ø 55 MM
LUMENS	: 630LM

07
W



PRQ 14 (SQUARE)

WATTS	: 7W
FINISH	: SAND WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K, 5000K
CRI	: RA>80
DIMENSION	: 90 X 90 X H 90 MM
CUTOUT	: Ø 80 X 80 MM
LUMENS	: 630LM
POWERED BY	: CREE

12
W




PRQ 14 PLUS (SQUARE)

WATTS	: 12W
FINISH	: SAND WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K, 5000K
CRI	: RA>80
DIMENSION	: 115 X 115 X H 106 MM
CUTOUT	: Ø 105 X 105 MM
LUMENS	: 1190LM
POWERED BY	: CREE




PRR TOM 1A - 1B

WATTS	: 9W
MATERIAL	: ALUMINIUM DIE-CAST
FINISH	: WHITE / BLACK
BEAM ANGLE	: 30°
CCT(K)	: 3000K, 4000K
CRI	: RA>90
DIMENSION	: 92 X 92 X H 76 MM
CUT-OUT	: Ø 86 X 86 X 100 H MM
LUMENS	: 900LM




1A - white | 1B - black

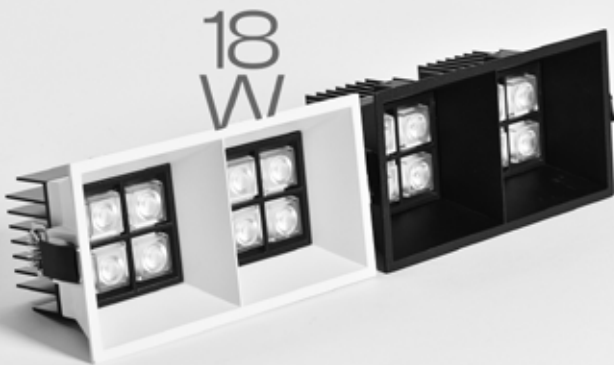


PRR TOM 2A - 2B

WATTS	: 18W
FINISH	: ALUMINIUM DIE-CAST
MATERIAL	: WHITE / BLACK
BEAM ANGLE	: 30°
CCT(K)	: 3000K, 4000K
CRI	: RA>90
DIMENSION	: 174 X 92 X H 76 MM
CUT-OUT	: Ø 168 X 86 X 100 H MM
LUMENS	: 1800LM



2A - white | 2B - black

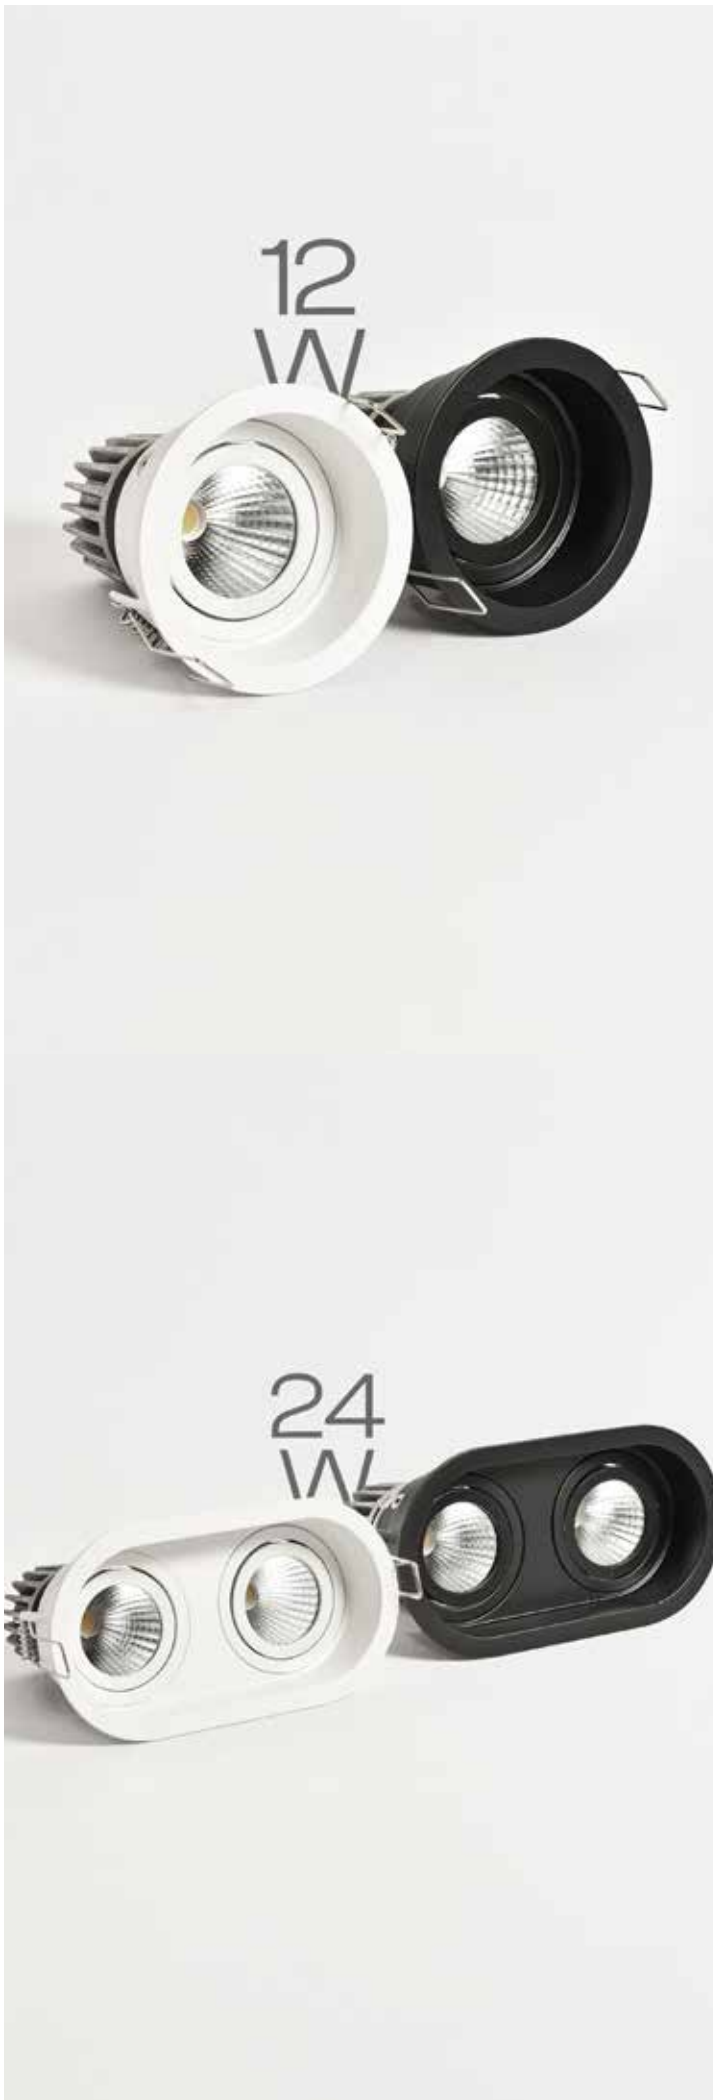

PRE DOMO 1A - 1B

WATTS	: 12W
FINISH	: WHITE / BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K
CRI	: ≥ 90
DIMENSION	: 90 X H 100 MM
CUTOUT	: Ø 75 MM
LUMENS	: 1320LM
POWERED BY	bridgelux.

1A - white | 1B - black

PRE DOMO 2A - 2B

WATTS	: 12W X 2 = 24w
FINISH	: WHITE / BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K
CRI	: ≥ 90
DIMENSION	: 170 X 90 X H 100 MM
CUTOUT	: 155 X 75 MM
LUMENS	: 2640LM
POWERED BY	bridgelux.

2A - white | 2B - black



CTT COLOUR CHANGING

ALL ON

SCENE 1

(Lock: Hold down at once when the light flashes twice)

WARM

BRIGHTNESS-

SCENE3

GROUP 1-9

GROUP I - III

ALL OFF

SCENE 2

BRIGHTNESS+

COOL

SWITCHING

SCENE4

(Unlock: Hold down at once when the light flashes twice)



PRE SPOUT 1A - 1B

WATTS	: 12W
FINISH	: MATT WHITE / BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 80
DIMENSION	: 90 X H 95 MM
CUTOUT	: Ø 83 MM
LUMENS	: 1080LM
POWERED BY	bridgeLux.

1A - white | 1B - black



CCT adjustable & dimmable

PRE SPOUT 2A - 2B

WATTS	: 12w X 2 = 24W
FINISH	: MATT WHITE / BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 80
DIMENSION	: 175 X 95 X H 95 MM
CUTOUT	: 167 X H 82 MM
LUMENS	: 2160LM
POWERED BY	bridgeLux.

2A - white | 2B - black



CCT adjustable & dimmable

07
W



PRE SWING 1A-1B-1C

WATTS	: 7W
FINISH	: SAND WHITE/ SAND BLACK/ GOLD + BLACK
BEAM ANGLE	: 60°
CCT(K)	: 3000K, 4000K
CRI	: ≥ 85
DIMENSION	: Ø 70 X H 77 MM
CUTOUT	: 58 MM
LUMENS	: 630LM
POWERED BY	

1A - sand white | 1B - sand black | 1C - gold + black

12
W



PRE SWING 2A-2B-2C

WATTS	: 12W
FINISH	: SAND WHITE/ SAND BLACK/ GOLD + BLACK
BEAM ANGLE	: 60°
CCT(K)	: 3000K, 4000K
CRI	: ≥ 85
DIMENSION	: Ø 85 X H 85 MM
CUTOUT	: 60 MM
LUMENS	: 1080LM
POWERED BY	

1A - sand white | 1B - sand black | 1C - gold + black

07
W



PRE SWINGER 1A-1B-1C

WATTS	: 7W
FINISH	: SAND WHITE/ SAND BLACK/ GOLD + BLACK
BEAM ANGLE	: 60°
CCT(K)	: 3000K, 4000K
CRI	: ≥ 85
DIMENSION	: Ø 70 X H 87 MM
LUMENS	: 630LM
POWERED BY	bridgelux

1A - sand white | 1B - sand black | 1C - gold + black

12
W



PRE SWINGER 2A-2B-2C

WATTS	: 12W
FINISH	: SAND WHITE/ SAND BLACK/ GOLD + BLACK
BEAM ANGLE	: 60°
CCT(K)	: 3000K, 4000K
CRI	: ≥ 85
DIMENSION	: Ø 85 X H 106 MM
LUMENS	: 1080LM
POWERED BY	bridgelux

1A - sand white | 1B - sand black | 1C - gold + black

12
W



PRO SCOTT

WATTS	: 12W
FINISH	: MATT WHITE
MATERIAL	: ALUMINIUM
REFLECTOR	: ANTI GLARE OPTICAL REFLECTOR
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 80
DIMENSION	: 73 X H 118 MM
CUTOUT	: Ø 65 MM
LUMENS	: 1350LM
ADJUSTABLE ANGLE	: LAMP HEAD 0 ~ 80° / 340°
DRIVER	: PHILIPS OR EQUIVALENT
POWERED BY	CREE

12
W



PRO SCOOP 1

WATTS	: 12W
FINISH	: WHITE
MATERIAL	: ALUMINIUM
REFLECTOR	: ANTI GLARE OPTICAL REFLECTOR
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 80
DIMENSION	: 98 X H 120 MM
CUTOUT	: Ø 90 MM
LUMENS	: 1350LM
ADJUSTABLE ANGLE	: LAMP HEAD 0 ~ 80° / 340°
DRIVER	: PHILIPS OR EQUIVALENT
POWERED BY	CREE

24
W



PRO SCOOP 2

WATTS	: 12W X 2 = 24W
FINISH	: WHITE
MATERIAL	: ALUMINIUM
REFLECTOR	: ANTI GLARE OPTICAL REFLECTOR
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 80
DIMENSION	: 185 X 100 X H 120 MM
CUTOUT	: 175 X H 90 MM
LUMENS	: 2700LM
ADJUSTABLE ANGLE	: LAMP HEAD 0 ~ 80° / 340°
DRIVER	: PHILIPS OR EQUIVALENT
POWERED BY	CREE

25
W



PRO SCOOPER 1

WATTS	: 25W
FINISH	: WHITE
MATERIAL	: ALUMINIUM
REFLECTOR	: ANTI GLARE OPTICAL REFLECTOR
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 80
DIMENSION	: 130 X H 135 MM
CUTOUT	: Ø 120 MM
LUMENS	: 2250LM
ADJUSTABLE ANGLE	: LAMP HEAD 0 ~ 80° / 340°
DRIVER	: PHILIPS OR EQUIVALENT
POWERED BY	CREE



PRO SCREW DRIVER NEW

WATTS	: 12W
FINISH	: WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 80
DIMENSION	: 85 X H 95 MM
LUMENS	: 1350LM
ADJUSTABLE ANGLE	: LAMP HEAD 0 ~ 80° / 340°
DRIVER	: PHILIPS OR EQUIVALENT
POWERED BY	CREE



PRO SCREW DRIVER MINI

WATTS	: 12W
FINISH	: WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 80
DIMENSION	: 74 X H 88 MM
LUMENS	: 1350LM
ADJUSTABLE ANGLE	: LAMP HEAD 0 ~ 80° / 340°
DRIVER	: PHILIPS OR EQUIVALENT
POWERED BY	CREE



PRO SCREW RD NEW

WATTS	: 12W
FINISH	: WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 80
DIMENSION	: 85 X H 71 MM
CUTOUT	: Ø 78 MM
LUMENS	: 1350LM
ADJUSTABLE ANGLE	: LAMP HEAD 0 ~ 80° / 340°
DRIVER	: FULHAM OR EQUIVALENT
POWERED BY	CREE



PRE FLOCK 1B

WATTS	: 10W
MATERIAL	: ALUMINIUM
FINISH	: SAND BLACK
BEAM ANGLE	: 38°
CCT(K)	: 3000K, 4000K
CRI	: ≥ 85
DIMENSION	: Ø 48 X H 120 MM
LUMENS	: 1050LM
POWERED BY	bridgelux



PRE LOOP 1A - 1B

WATTS	: 12W
FINISH	: SAND WHITE / BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 60 X H 113 MM
LUMENS	: 1080LM
POWERED BY	bridgelux.

1A - white | 1B - black



PRE LOOP 2A - 2B

WATTS	: 18W
FINISH	: SAND WHITE / BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 80 X H 134 MM
LUMENS	: 1620LM
POWERED BY	bridgelux.

2A - white | 2B - black



PRE LOOP 3A - 3B

WATTS	: 30W
FINISH	: SAND WHITE / BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 6000K
CRI	: ≥ 85
DIMENSION	: 95 X H 140 MM
LUMENS	: 2700LM
POWERED BY	bridgelux.

3A - white | 3B - black


PRISHA PRIME OUTDOOR

Prisha illumination focuses on new ideas when it comes to outdoor lighting products.

Our aim is to provide our clients with the premium quality fixtures, custom orientation, quality assurance and professional retail services as the core values to a complete purchase experience.

*Used here is Prisha Prime series
PRO Bosaro 1 & PRO Bosaro 2*

Location: Dress Circle
Props: Drape Shoppe

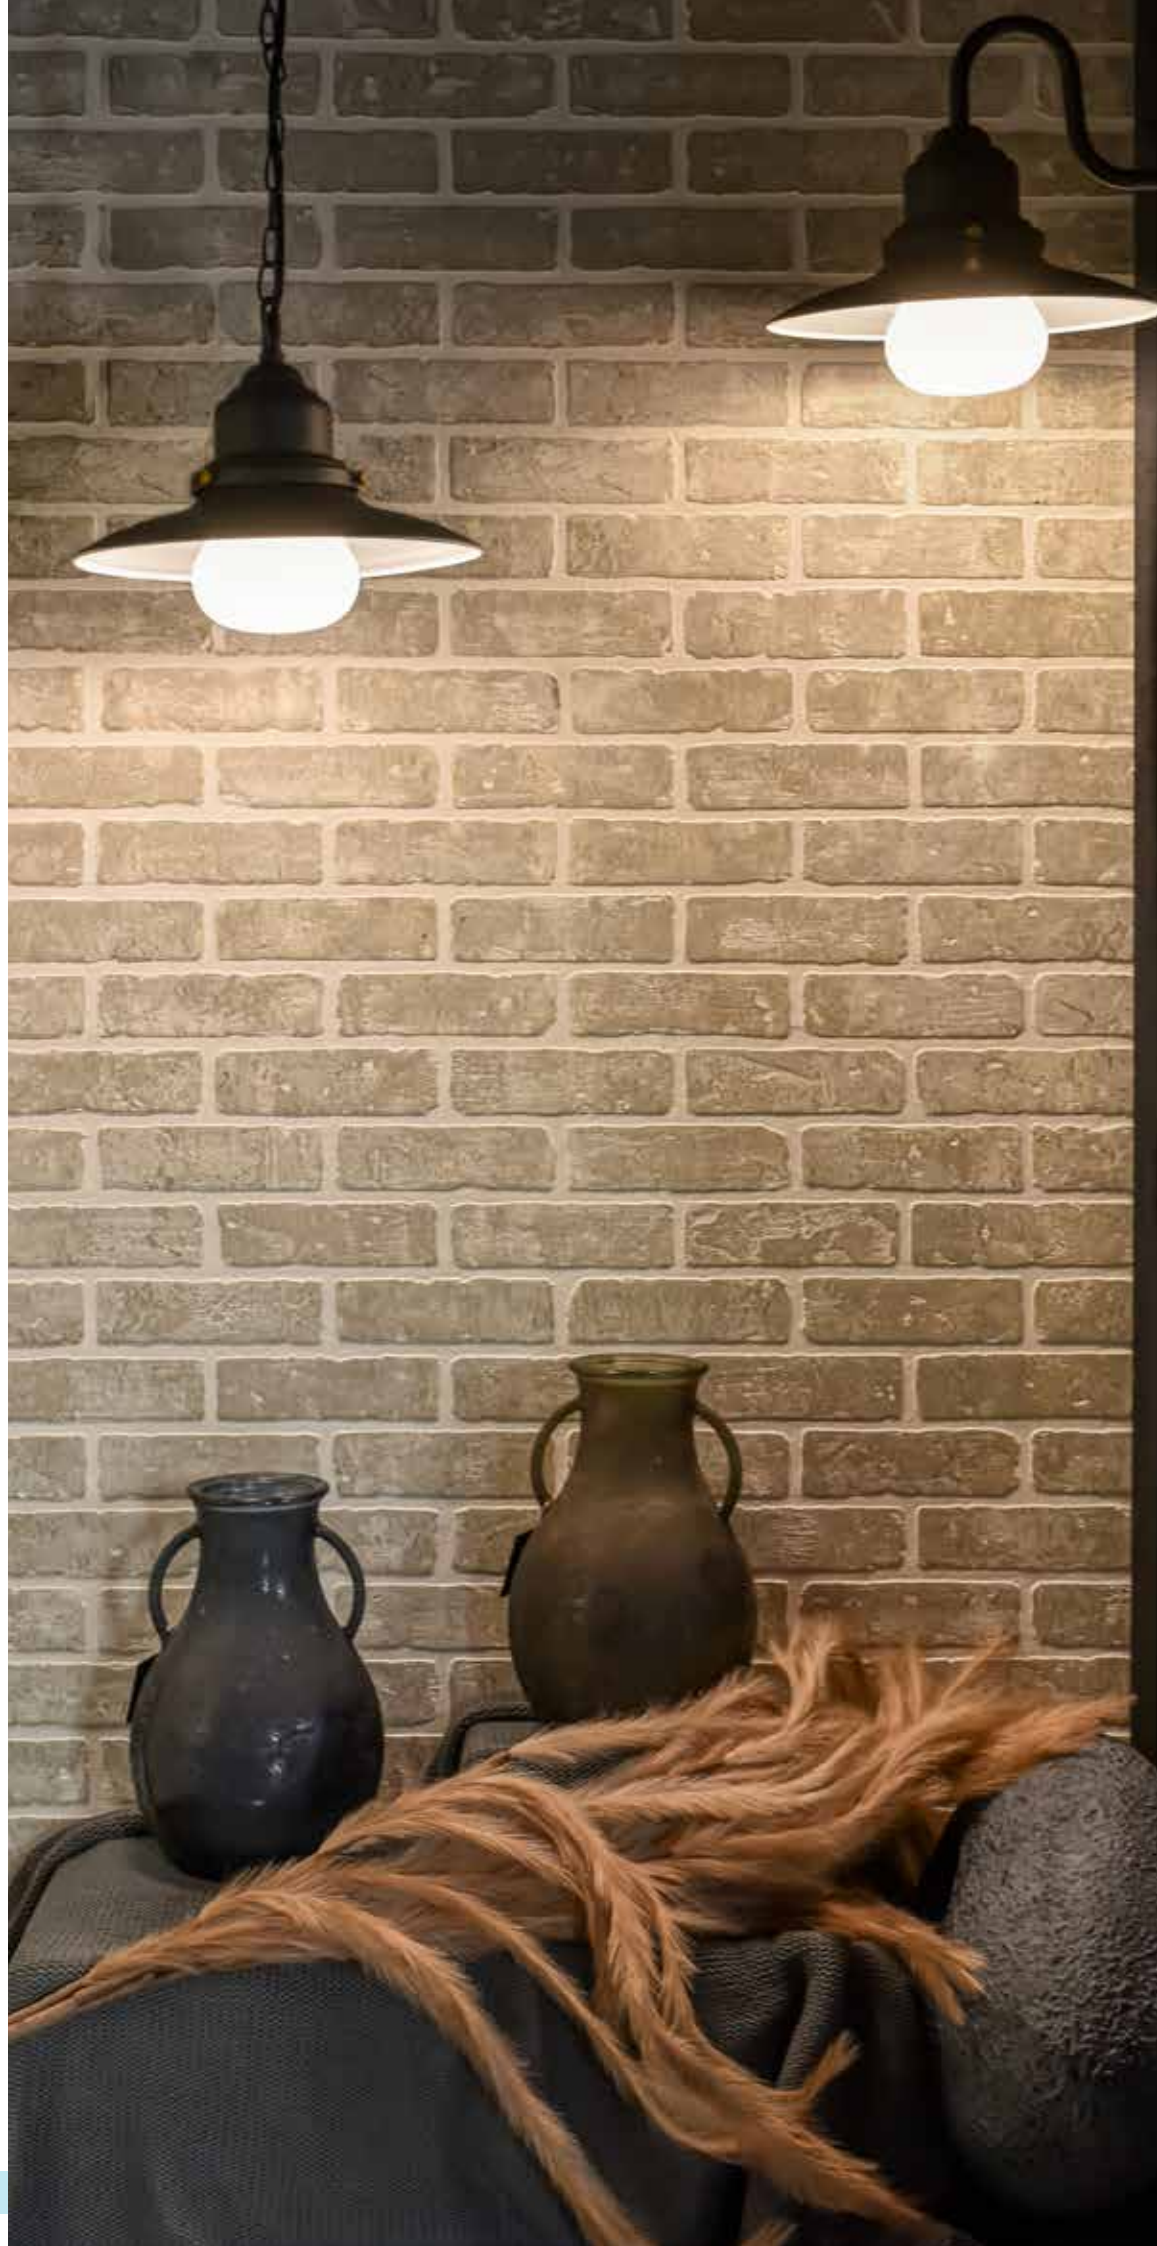



PRO ELEGANT SMALL

WATTS	: 8W
FINISH	: GRAPHITE GREY
MATERIAL	: ABS + PC BODY
CCT(K)	: 3000K, 4000K
DIMENSION	: DIA-190 MM X D-75 MM
DIFFUSER	: OPAL PC
LUMENS	: 520 LM
IP RATING	: IP54
IK RATING	: IK10
INPUT VOLTAGE	: AC DRIVERLESS
LAMP TYPE	: SMD 2835 LED
POWERED BY	EPISTAR



PRO ELEGANT MEDIUM

WATTS	: 13W
FINISH	: GRAPHITE GREY
MATERIAL	: ABS + PC BODY
CCT(K)	: 3000K, 4000K
DIMENSION	: DIA-245 MM X D-75 MM
DIFFUSER	: OPAL PC
LUMENS	: 970 LM
IP RATING	: IP54
IK RATING	: IK10
INPUT VOLTAGE	: AC DRIVERLESS
LAMP TYPE	: SMD 2835 LED
POWERED BY	EPISTAR




PRO ELEGANT BIG

WATTS	: 18W
FINISH	: GRAPHITE GREY
MATERIAL	: ABS + PC BODY
CCT(K)	: 3000K, 4000K
DIMENSION	: DIA-310 MM X D-75 MM
DIFFUSER	: OPAL PC
LUMENS	: 1100 LM
IP RATING	: IP54
IK RATING	: IK10
INPUT VOLTAGE	: AC DRIVERLESS
LAMP TYPE	: SMD 2835 LED
POWERED BY	EPISTAR



PRO ELEGANT OVAL

WATTS	: 9W (OUTDOOR BULKHEAD)
FINISH	: GRAPHITE GREY
MATERIAL	: ABS + PC BODY
CCT(K)	: 3000K, 4000K
DIMENSION	: W- 245 MM X D-69 MM X H-139 MM
DIFFUSER	: OPAL PC
LUMENS	: 550 LM
IP RATING	: IP54
IK RATING	: IK10
INPUT VOLTAGE	: AC DRIVERLESS
LAMP TYPE	: SMD 2835 LED
POWERED BY	EPISTAR

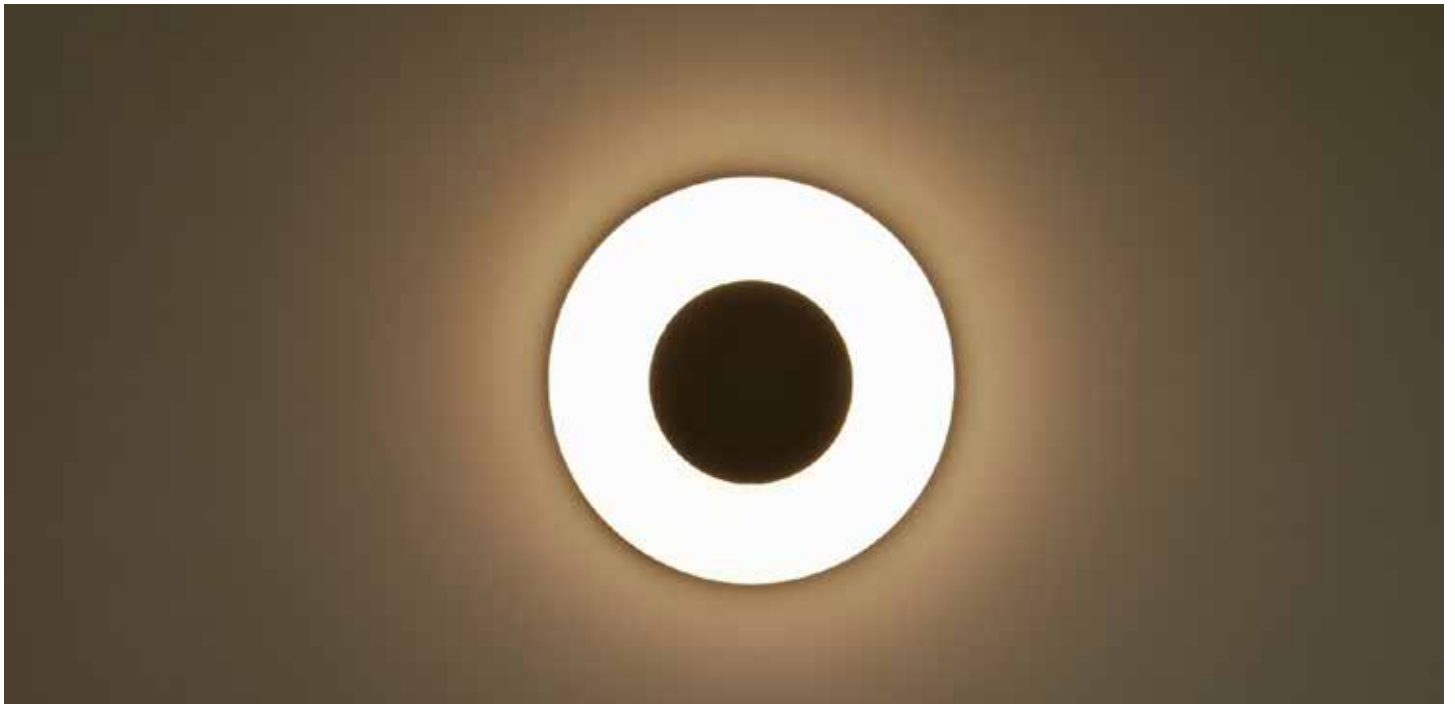

PRO PORCH SMALL

WATTS	: 8W
FINISH	: GRAPHITE GREY
MATERIAL	: ABS + PC BODY
CCT(K)	: 3000K
DIMENSION	: D 160 MM X H 45 MM
DIFFUSER	: OPAL PC
LUMENS	: 490 LM
IP RATING	: IP65
IK RATING	: IK08
LAMP TYPE	: SMD LED
POWERED BY	EPISTAR



PRO PORCH BIG

WATTS	: 14W
FINISH	: GRAPHITE GREY
MATERIAL	: ABS + PC BODY
CCT(K)	: 3000K
DIMENSION	: D 220 MM X H 50 MM
DIFFUSER	: OPAL PC
LUMENS	: 850 LM
IP RATING	: IP65
IK RATING	: IK08
LAMP TYPE	: SMD LED
POWERED BY	EPISTAR



PRO CELLAR

WATTS	: 25W
MATERIAL	: PC BODY
CCT(K)	: 3000K
DIMENSION	: DIA-280 MM X H-60 MM
DIFFUSER	: OPAL PC
LUMENS	: 2000 LM
IP RATING	: IP65
POWERED BY	: DRIVER ON BOARD



PRO DROP SQUARE

WATTS	: GU10 HOLDER
FINISH	: GRAPHITE GREY
MATERIAL	: ALUMINIUM BODY
DIMENSION	: W- 88 MM X D-88 MM X H-92 MM
DIFFUSER	: CLEAR GLASS
IP RATING	: IP65
POWERED BY	: GU10 EXTRA



PRO DROP ROUND

WATTS	: GU10 HOLDER
FINISH	: GRAPHITE GREY
MATERIAL	: ALUMINIUM BODY
DIMENSION	: DIA- 90 MM X H-100 MM
DIFFUSER	: CLEAR GLASS
IP RATING	: IP65
POWERED BY	: GU10 EXTRA



PROP C 28

WATTS	: 5W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 64 X H 82 MM
IP	: IP54
LAMP TYPE	: LED
LUMENS	: 480LM
POWERED BY	CREE



PROP C 25

WATTS	: 12W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 90 X H 150 MM
IP	: IP54
LAMP TYPE	: COB
LUMENS	: 960LM
POWERED BY	CREE



PROP EMY 1

WATTS	: 8W
MATERIAL	: ALUMINIUM
FINISH	: BLACK
BEAM ANGLE	: 110°
CCT(K)	: 3000K
CRI	: ≥80
DIMENSION	: 90 X H 46 MM
IP	: IP54
LUMENS	: 720LM



PROP EMY 2

WATTS	: 14W
MATERIAL	: ALUMINIUM
FINISH	: BLACK
BEAM ANGLE	: 110°
CCT(K)	: 3000K
CRI	: ≥80
DIMENSION	: 140 X H 46 MM
IP	: IP54
LUMENS	: 1260LM



PRO ENERGY SMALL

WATTS	: 6W (OUTDOOR WALL LIGHT)
FINISH	: GRAPHITE
MATERIAL	: ALUMINIUM DIE-CAST
CCT(K)	: 3000K
DIMENSION	: W- 220 MM X D-77 MM X H-90 MM
DIFFUSER	: OPAL PC
LUMENS	: 500 LM
IP RATING	: IP65
LAMP TYPE	: COB
POWERED BY	CREE



PRO ENERGY BIG

WATTS	: 12W (OUTDOOR WALL LIGHT)
FINISH	: GRAPHITE
MATERIAL	: ALUMINIUM DIE-CAST
CCT(K)	: 3000K
DIMENSION	: W- 300 MM X D-97 MM X H-120 MM
DIFFUSER	: OPAL PC
LUMENS	: 800 LM
IP RATING	: IP65
LAMP TYPE	: COB
POWERED BY	



PRO AERO SQUARE

WATTS	: 12W (OUTDOOR WALL LIGHT)
FINISH	: GRAPHITE
MATERIAL	: ALUMINIUM DIE-CAST
CCT(K)	: 3000K
DIMENSION	: W- 262 MM X D-53 MM X H-110 MM
DIFFUSER	: OPAL PC
LUMENS	: 1000 LM
IP RATING	: IP65
LAMP TYPE	: SMD LED
POWERED BY	EPISTAR



PRO AERO OVAL

WATTS	: 12W (OUTDOOR WALL LIGHT)
FINISH	: GRAPHITE GREY
MATERIAL	: ALUMINIUM DIE-CAST
CCT(K)	: 3000K
DIMENSION	: W- 292 MM X D- 53 MM X H-110 MM
DIFFUSER	: OPAL PC
LUMENS	: 1000 LM
IP RATING	: IP65
LAMP TYPE	: SMD LED
POWERED BY	EPISTAR



PRO AERO SMALL

WATTS	: 8W (OUTDOOR WALL LIGHT)
FINISH	: GRAPHITE
MATERIAL	: ALUMINIUM DIE-CAST
CCT(K)	: 3000K
DIMENSION	: W- 60 MM X D-60 MM X H-144 MM
DIFFUSER	: OPAL PC
LUMENS	: 720 LM
IP RATING	: IP65
INPUT VOLTAGE LAMP TYPE	: AC DRIVERLESS
POWERED BY	EPISTAR



PRO AERO BRICK

WATTS	: 13W
FINISH	: GRAPHITE
MATERIAL	: ALUMINIUM DIE-CAST
CCT(K)	: 3000K
DIMENSION	: W- 200 MM X D- 30 MM X H-135 MM
DIFFUSER	: OPAL PC
LUMENS	: 650 LM
IP RATING	: IP65
LAMP TYPE	: SMD LED
POWERED BY	EPISTAR



PRO PORCH IVY

WATTS	: 12W
FINISH	: GRAPHITE
MATERIAL	: DIE CASTING ALUMINIUM
CCT(K)	: 3000K
DIMENSION	: W-215 MM X H-125 MM
DIFFUSER	: PC DIFFUSER
LUMENS	: 1000 LM
IP RATING	: IP65
LAMP TYPE	: COB
POWERED BY	CREE





PRO LUCY

WATTS	: 10W
FINISH	: GRAPHITE GREY
MATERIAL	: ALUMINIUM DIE-CAST
CCT(K)	: 3000K
DIMENSION	: W- 200 MM X D- 85 MM X H-135 MM
DIFFUSER	: OPAL PC
LUMENS	: 700 LM
IP RATING	: IP54
LAMP TYPE	: SMD LED
POWERED BY	EPISTAR



PRO ROCK

WATTS	: 2 X 5W= 10W
FINISH	: GRAPHITE GREY
MATERIAL	: ALUMINIUM DIE-CAST
CCT(K)	: 3000K
DIMENSION	: W- 115 MM X H-120 MM
DIFFUSER	: PC DIFFUSER
IP RATING	: IP65
LAMP TYPE	: COB
POWERED BY	CREE



PRO ROCKY

WATTS	: 2 X 6W = 12W
FINISH & MATERIAL	: GRAPHITE GREY & DIE CASTING ALU.
CCT(K)	: 3000K
DIFFUSER	: OPAL PC DIFFUSER
DIMENSION	: 375 X 160 X 260MM
LUMENS	: 2 X 400Lm
IP RATING	: IP54
LAMP TYPE	: SMD LED
POWERED BY	: CREE



PRO MOTION

WATTS	: 12W
SENSOR	: MOVEMENT SENSOR
FINISH & MATERIAL	: GRAPHITE GREY & DIE CASTING ALU.
CCT(K)	: 3000K
DIFFUSER	: OPAL PC DIFFUSER
DIMENSION	: 165 X 200 X H 153MM
LUMENS	: 900Lm
IP RATING	: IP65
LAMP TYPE	: SMD LED
POWERED BY	: EPISTAR

30
W



PRO WOLLARD

WATTS	: 30W
FINISH	: GRAPHITE
MATERIAL	: ALUMINIUM BODY
CCT(K)	: 3000K
DIMENSION	: W- 264 MM X D-117 MM X H-308 MM
DIFFUSER	: OPAL PC
IP RATING	: IP65
POWERED BY	: SMD LED





PRO LEVIS

WATTS	: 2 X 9W = 18W
FINISH	: GRAPHITE GREY
MATERIAL	: ALUMINIUM BODY
CCT(K)	: 3000K
DIMENSION	: Ø 85 MM x D-83 MM x H-210 MM
DIFFUSER	: GLASS DIFFUSER
IP RATING	: IP65
POWERED BY	CREE



PRO FLINT

WATTS	: 9W SMD LED
FINISH	: GRAPHITE GREY
MATERIAL	: ALUMINIUM + GLASS
CCT(K)	: 3000K
DIMENSION	: H 210 X W 130 X D 103 MM
IP RATING	: IP65



PRO BOSARO 1

WATTS	: 7W
FINISH	: GRAPHITE GREY
MATERIAL	: STEEL
CCT(K)	: 3000K
DIMENSION	: W- 110 MM X D-320 MM X H-860 MM
DIFFUSER	: GLASS DIFFUSER
LUMENS	: 670 LM
IP RATING	: IP44
LAMP TYPE	: SMD LED
POWERED BY	EPISTAR



PRO BOSARO 2

WATTS	: 7W
FINISH	: GRAPHITE GREY
MATERIAL	: STEEL
CCT(K)	: 3000K
DIMENSION	: W- 130 MM X D-320 MM X H-310 MM
DIFFUSER	: GLASS DIFFUSER
LUMENS	: 670 LM
IP RATING	: IP44
LAMP TYPE	: SMD LED
POWERED BY	EPISTAR



PRO AIR

WATTS	: 8 SIDED OUTDOOR WALL LANTERN
FINISH	: GRAPHITE GREY
MATERIAL	: DIE CASTING ALUMINIUM
DIMENSION	: W- 155 MM X D-206 MM X H-227 MM
DIFFUSER	: PC DIFFUSER
IP RATING	: IP44
LAMP TYPE	: E27 MAX 15W CFL (LAMP EXCLUDED)



PROP W 20

WATTS	: 12W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 190 X 160 MM
IP	: IP54
LUMENS	: 960LM
LAMP TYPE	: LED
POWERED BY	:  EDISON



PROP W 37

WATTS	: 12W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
DIFFUSER	: PC DIFFUSER
CCT(K)	: 3000K
DIMENSION	: 105 X H 290 MM
IP	: IP54



PROP W 36

WATTS	: 12W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 45 X H 180 MM
IP RATING	: IP54
POWERED BY	: 



PROP W 48

WATTS	: 12W
MATERIAL	: ALUMINIUM + PC DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 160 X 100 X H 87 MM
IP RATING	: IP54
LAMP TYPE	: LED



PROP W 52

WATTS	: 6W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 96 X 153 MM
IP RATING	: IP54
LAMP TYPE	: LED
POWERED BY	: 



PROP W 53

WATTS	: 9W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 165 X 118 MM
IP RATING	: IP54
LAMP TYPE	: LED
POWERED BY	: OSRAM



PROP W 26

WATTS	: 5W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 77 X 77 X H 57 MM
IP RATING	: IP54
LUMENS	: 840LM
POWERED BY	CREE



PROP W 27

WATTS	: 2 X 5W = 10W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 64 X H 158 MM
IP RATING	: IP54
LUMENS	: 800LM
LAMP TYPE	: COB
POWERED BY	CREE



PROP W 23

WATTS	: 12W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 90 X H 155 MM
IP RATING	: IP54
LUMENS	: 960LM
LAMP TYPE	: COB
POWERED BY	CREE



PROP W 24

WATTS	: 2 X 12W = 24W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 90 X H 240 MM
IP RATING	: IP54
LUMENS	: 1920LM
LAMP TYPE	: COB
POWERED BY	CREE

03
W



PRO RADO 1

WATTS	: 3W
FINISH	: BLACK
MATERIAL	: ALUMINIUM DIE-CAST
CCT(K)	: 3000K
DIMENSION	: 90 X 90 X 35 MM
CUTOUT	: 75 X 55 MM
IP RATING	: IP65
LAMP TYPE	: LED + MOTION SENSOR
POWERED BY	: OSRAM

03
W



PRO RADO 2

WATTS	: 3W
FINISH	: BLACK
MATERIAL	: ALUMINIUM DIE-CAST
CCT(K)	: 3000K
DIMENSION	: 90 X 90 X 35 MM
CUTOUT	: 75 X 55 MM
IP RATING	: IP65
LAMP TYPE	: LED + MOTION SENSOR
POWERED BY	: OSRAM

03
W



PRO RADO 3

WATTS	: 3W
FINISH	: BLACK
MATERIAL	: ALUMINIUM DIE-CAST
CCT(K)	: 3000K
DIMENSION	: 90 X 90 X 35 MM
CUTOUT	: 75 X 55 MM
IP RATING	: IP65
LAMP TYPE	: LED + MOTION SENSOR
POWERED BY	: OSRAM

03
W



PRO RADO 4

WATTS	: 3W
FINISH	: BLACK
MATERIAL	: ALUMINIUM DIE-CAST
CCT(K)	: 3000K
DIMENSION	: 90 X 90 X 35 MM
CUTOUT	: 75 X 55 MM
IP RATING	: IP65
LAMP TYPE	: LED + MOTION SENSOR
POWERED BY	: OSRAM



PRO ANGELA ROUND

WATTS	: 2W (SURFACE MOUNTED ABS + PC BODY STEP LIGHT)
FINISH	: GRAPHITE
MATERIAL	: PLASTIC
CCT(K)	: 3000K, 4000K
DIMENSION	: DIA- 128 MM x D-30 MM
DIFFUSER	: CLEAR PC
LUMENS	: 180 LM
IP RATING	: IP54
LAMP TYPE	: SMD LED
POWERED BY	EPISTAR



PRO ANGELA RECTANGLE

WATTS	: 3W (SURFACE MOUNTED ABS + PC BODY STEP LIGHT)
FINISH	: GRAPHITE
MATERIAL	: PLASTIC
CCT(K)	: 3000K, 4000K
DIMENSION	: W- 210 MM x D-30 MM x H-85 MM
DIFFUSER	: CLEAR PC
LUMENS	: 270 LM
IP RATING	: IP54
LAMP TYPE	: SMD LED
POWERED BY	EPISTAR



PRO ANGELA DIRECT

WATTS	: 5W (SURFACE MOUNTED ABS + PC BODY STEP LIGHT)
FINISH	: GRAPHITE
MATERIAL	: PLASTIC
CCT(K)	: 3000K, 4000K
DIMENSION	: W- 210 MM x D-30 MM x H-85 MM
DIFFUSER	: CLEAR PC
LUMENS	: 400 LM
IP RATING	: IP54
LAMP TYPE	: SMD LED
POWERED BY	EPISTAR



PRO ENERGY BELLE

WATTS	: 5W
FINISH	: GRAPHITE GREY
MATERIAL	: DIE CASTING ALUMINIUM
CCT(K)	: 3000K
DIMENSION	: W- 240 MM x D-37 MM x H-75 MM
DIFFUSER	: OPAL PC
LUMENS	: 300 LM
IP RATING	: IP65
LAMP TYPE	: SMD LED
POWERED BY	EPISTAR



PRO BRICK

WATTS	: 9W
FINISH	: GRAPHITE GREY
MATERIAL	: DIE CASTING ALUMINIUM
CCT(K)	: 3000K
DIMENSION	: W- 262 MM x D-53 MM x H-55 MM
DIFFUSER	: GLASS DIFFUSER
LUMENS	: 650 LM
IP RATING	: IP65
LAMP TYPE	: LED
POWERED BY	EPISTAR



PRO PARKER

WATTS	: 12W
FINISH	: GRAPHITE GREY
MATERIAL	: DIE CASTING ALUMINIUM
CCT(K)	: 3000K
DIMENSION	: W- 250 MM x D-90 MM x H-98 MM
DIFFUSER	: CLEAR PC
IP RATING	: IP65
LAMP TYPE	: SMD LED
POWERED BY	EPISTAR



PROP W 40

WATTS	: 4W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 105 X H 105 MM
IP	: IP54
DIFFUSER	: PC DIFFUSER



PROP W 41

WATTS	: 4W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: DIA 115 MM
IP	: IP54
DIFFUSER	: PC DIFFUSER



PROP F 45

WATTS	: 3W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: Ø95 X H 60 MM
IP	: IP54
LAMP TYPE	: LED
POWERED BY	: OSRAM



PROP F 46

WATTS	: 3W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 95 X 95 X H 60 MM
IP	: IP54
LAMP TYPE	: LED
POWERED BY	: OSRAM



PROP F 47

WATTS	: 5W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 250 X 45 X H 45 MM
IP	: IP54
LAMP TYPE	: LED
POWERED BY	: CREE



PRO RADIUS

WATTS	: OUTDOOR SPOTLIGHT WITH SPIKE
FINISH	: GRAPHITE
MATERIAL	: ABS + PC BODY
DIMENSION	: W- 80 MM X D-130 MM X H-113 MM
IP RATING	: IP54
LAMP TYPE	: GU10 LED MAX 6W (LAMP EXCLUDED)



PRO RISE

WATTS	: OUTDOOR SPOTLIGHT WITH SPIKE
FINISH	: GRAPHITE
MATERIAL	: ALUMINIUM DIE CAST
DIMENSION	: D98 X 95 X 59 MM
IP RATING	: IP65
LAMP TYPE	: GU10 LED MAX 50W (LAMP EXCLUDED)



PROP S 29

WATTS	: 7W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 91 X 64 X H 186 MM
IP RATING	: IP54
LAMP TYPE	: COB
LUMENS	: 560 LM
POWERED BY	CREE



PROP S 30

WATTS	: 12W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 95 X 84 X H 186 MM
IP RATING	: IP54
LAMP TYPE	: COB
LUMENS	: 1080 LM
POWERED BY	CREE



PRO ARISE

WATTS	: 9W (OUTDOOR WALL LIGHT)
FINISH	: GRAPHITE GREY
MATERIAL	: ALUMINIUM DIE-CAST
BEAM ANGLE	: ADJUSTABLE BEAM ANGLE (30-60)
CCT(K)	: 3000K
DIMENSION	: W- 85 MM x D- 154 MM x H-150 MM
DIFFUSER	: CLEAR GLASS
LUMENS	: 800 LM
IP RATING	: IP65
LAMP TYPE	: COB
POWERED BY	CREE



PRO ALROUND

WATTS	: 12W (OUTDOOR WALL LIGHT)
FINISH	: GRAPHITE GREY
MATERIAL	: ALUMINIUM DIE-CAST
CCT(K)	: 3000K
DIMENSION	: W- 160 MM x D-235 MM x H-95 MM
DIFFUSER	: CLEAR GLASS
LUMENS	: 800 LM
IP RATING	: IP65
LAMP TYPE	: COB
POWERED BY	CREE





PRO VENICE 1

WATTS	: 15W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
BEAM ANGLE	: 15° X 45°
CCT(K)	: 3000K
DIMENSION	: W 40 X H 30 X L 500 MM
IP RATING	: IP67
LAMP TYPE	: PCB
INPUT	: DC 24V (DRIVER NOT INCLUDED)
POWERED BY	: OSRAM



PRO VENICE 2

WATTS	: 30W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
BEAM ANGLE	: 15° X 45°
CCT(K)	: 3000K
DIMENSION	: W 40 X H 30 X L 1000 MM
IP RATING	: IP67
LAMP TYPE	: PCB
INPUT	: DC 24V (DRIVER NOT INCLUDED)
POWERED BY	: OSRAM



PRO TWIN

WATTS	: 2 X 1W= 2W (SURFACE MOUNTED GROUND LIGHT)
FINISH	: GRAPHITE
MATERIAL	: ALUMINIUM DIE-CAST
CCT(K)	: 3000K
DIMENSION	: DIA- 210 MM x D-50 MM
DIFFUSER	: CLEAR PC
LUMENS	: 200 LM
IP RATING	: IP67
IK RATING	: IK10
MAX WEIGHT	: 2000KG
LAMP TYPE	: LED
POWERED BY	CREE



PRO QUARDO

WATTS	: 4 X 1W= 4W (SURFACE MOUNTED GROUND LIGHT)
FINISH	: GRAPHITE
MATERIAL	: ALUMINIUM DIE-CAST
CCT(K)	: 3000K
DIMENSION	: DIA- 210 MM X D-50 MM
DIFFUSER	: CLEAR PC
LUMENS	: 400 LM
IP RATING	: IP67
IK RATING	: IK10
MAX WEIGHT	: 2000KG
LAMP TYPE	: LED
POWERED BY	CREE





PRO POLAR 1

WATTS	: 9W
FINISH	: GRAPHITE GREY
MATERIAL	: ALUMINIUM DIE-CAST
CCT(K)	: 3000K
DIMENSION	: DIA- 107 MM X H-120 MM
DIFFUSER	: OPAL PC
LUMENS	: 720 LM
IP RATING	: IP65
LAMP TYPE	: SMD LED
POWERED BY	EPISTAR



PRO POLAR 2

WATTS	: 9W
FINISH	: GRAPHITE GREY
MATERIAL	: ALUMINIUM DIE-CAST
CCT(K)	: 3000K
DIMENSION	: DIA- 107 MM X H-140 MM
DIFFUSER	: OPAL PC
LUMENS	: 720 LM
IP RATING	: IP65
LAMP TYPE	: SMD LED
POWERED BY	EPISTAR



PRO POLAR 3

WATTS	: 9W
FINISH	: GRAPHITE GREY
MATERIAL	: ALUMINIUM DIE-CAST
CCT(K)	: 3000K
DIMENSION	: DIA- 107 MM X H-400 MM
DIFFUSER	: OPAL PC
LUMENS	: 720 LM
IP RATING	: IP65
LAMP TYPE	: SMD LED
POWERED BY	EPISTAR



PRO POLAR 4

WATTS	: 9W
FINISH	: GRAPHITE GREY
MATERIAL	: ALUMINIUM DIE-CAST
CCT(K)	: 3000K
DIMENSION	: DIA- 107 MM X H-600 MM
DIFFUSER	: OPAL PC
LUMENS	: 720 LM
IP RATING	: IP65
LAMP TYPE	: SMD LED
POWERED BY	EPISTAR

05
W



PRO POLISH 1

WATTS	: 5W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: BLACK
CCT(K)	: 3000K
DIFFUSER	: OPAL PC DIFFUSER
DIMENSION	: 50 X 200 X 140 MM
LUMENS	: 500LM
IP RATING	: IP65
LAMP TYPE	: SMD LED
POWERED BY	: EPISTAR

05
W



PRO POLISH 2

WATTS	: 5W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: BLACK
CCT(K)	: 3000K
DIFFUSER	: OPAL PC DIFFUSER
DIMENSION	: 50 X 200 X 800 MM
LUMENS	: 500LM
IP RATING	: IP65
LAMP TYPE	: SMD LED
POWERED BY	: EPISTAR



PRO TRONO 1

WATTS	: 12W
FINISH	: GRAPHITE GREY
MATERIAL	: ALUMINIUM DIE-CAST
CCT(K)	: 3000K
DIMENSION	: W-100 MM X D-100 MM X H-150 MM
DIFFUSER	: OPAL PC
LUMENS	: 600 LM
IP RATING	: IP65
LAMP TYPE	: SMD LED
POWERED BY	EPISTAR



PRO TRONO 2

WATTS	: 12W
FINISH	: GRAPHITE GREY
MATERIAL	: ALUMINIUM DIE-CAST
CCT(K)	: 3000K
DIMENSION	: W-100 MM X D-100 MM X H-500 MM
DIFFUSER	: OPAL PC
LUMENS	: 600 LM
IP RATING	: IP65
LAMP TYPE	: SMD LED
POWERED BY	EPISTAR



PRO TRONO 3

WATTS	: 12W
FINISH	: GRAPHITE GREY
MATERIAL	: ALUMINIUM DIE-CAST
CCT(K)	: 3000K
DIMENSION	: W-100 MM X D-100 MM X H-800 MM
DIFFUSER	: OPAL PC
LUMENS	: 600 LM
IP RATING	: IP65
LAMP TYPE	: SMD LED
POWERED BY	EPISTAR



PRO PATH

WATTS	: 6W
FINISH	: GRAPHITE GREY
MATERIAL	: ALUMINIUM DIE-CAST
CCT(K)	: 3000K
DIMENSION	: W-100 MM X D-50 MM X H-250 MM
DIFFUSER	: OPAL PC
IP RATING	: IP65
POWERED BY	: SMD 2835



PRO POT 1

WATTS	: 2 X 5W = 10W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: BLACK
CCT(K)	: 3000K
DIFFUSER	: OPAL PC DIFFUSER
DIMENSION	: 110 X 60 X H 340 MM
LUMENS	: 110 LM
IP RATING	: IP65
LAMP TYPE	: SMD LED
POWERED BY	: EPISTAR



PRO POT 2

WATTS	: 2 X 5W = 10W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: BLACK
CCT(K)	: 3000K
DIFFUSER	: OPAL PC DIFFUSER
DIMENSION	: 110 X 60 X H 770 MM
LUMENS	: 110 LM
IP RATING	: IP65
LAMP TYPE	: SMD LED
POWERED BY	: EPISTAR



PRO CHARCOAL

WATTS	: 12W SMD LED (SPIKE LIGHT)
MATERIAL	: ALUMINIUM + PC
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: H 500 X W 110 X 18 MM (SPIKE 200 MM)
IP RATING	: IP65
WIRE	: 1 MTR, CABLE
POWERED BY	: CREE



PRO CUBO 1

WATTS	: 3W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: BLACK
CCT(K)	: 3000K
DIMENSION	: 120 X H 240 MM
LUMENS	: 270 LM
IP RATING	: IP65
POWERED BY	: OSRAM



PRO PYRAMID 1

WATTS	: E27 HOLDER
MATERIAL	: ALUMINIUM
FINISH	: BLACK
CCT(K)	: 3000K
DIMENSION	: 200 X W 200 X H 35 MM
IP RATING	: IP65
POWERED BY	: LAMP NOT INCLUDED



PRO AQUA 1

WATTS	: 12W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: BLACK
CCT(K)	: 3000K
DIMENSION	: 103 X H 350 MM
IP RATING	: IP65
POWERED BY	: EPISTAR



PRO AQUA 2

WATTS	: 12W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: BLACK
CCT(K)	: 3000K
DIMENSION	: 103 X H 600 MM
IP RATING	: IP65
POWERED BY	: EPISTAR



PROP B 19

WATTS	: 12W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 180 X H 500 MM
IP RATING	: IP54
LUMENS	: 960LM
LAMP TYPE	: LED
POWERED BY	:  DISON



PROP G 38

WATTS	: 12W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 105 X H 305 MM
DIFFUSER	: PC DIFFUSER
IP RATING	: IP54



PROP G 39

WATTS	: 12W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 105 X H 500 MM
DIFFUSER	: PC DIFFUSER
IP RATING	: IP54



PROP B 49

WATTS	: 12W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 140 D X H 254 MM
IP RATING	: IP54
POWERED BY	CREE



PROP B 50

WATTS	: 12W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 140 D X H 508 MM
IP RATING	: IP54
POWERED BY	CREE



PROP B 51

WATTS	: 12W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 140 D X H 762 MM
IP RATING	: IP54
POWERED BY	CREE



PRO ENTICER 1

WATT	: 20W
MATERIAL	: PC DIFFUSER + DIE CAST ALUMINUM
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENTION	: H 2 FT. × D 75 MM
IP RATING	: IP54
DRIVER	: PRISHA ISOLATED OR EQUIVALENT
POWERED BY	bridgelux.



PRO ENTICER 2

WATT	: 40W
MATERIAL	: PC DIFFUSER + DIE CAST ALUMINUM
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENTION	: H 4 FT. × D 75 MM
IP RATING	: IP54
DRIVER	: PRISHA ISOLATED OR EQUIVALENT
POWERED BY	bridgelux.




PRO ENTICER 3

WATT	: 80W
MATERIAL	: PC DIFFUSER + DIE CAST ALUMINUM
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENTION	: H 8 FT. × D 75 MM
IP RATING	: IP54
DRIVER	: PRISHA ISOLATED OR EQUIVALENT
POWERED BY	bridgelux.



PRO POST TOP 1

WATTS	: 50W
FINISH	: GRAPHITE GREY
MATERIAL	: PC DIFFUSER + DIE CAST ALUMINUM
DIMENSION	: D 395 MM X H 275 MM
IP RATING	: IP65
DRIVER	: PRISHA ISOLATED OR EQUIVALENT
POWERED BY	



PRO POST TOP 2

WATTS	: 50W
FINISH	: GRAPHITE GREY
MATERIAL	: PC DIFFUSER + DIE CAST ALUMINUM
DIMENSION	: D 395 MM X H 65 MM
IP RATING	: IP65
DRIVER	: PRISHA ISOLATED OR EQUIVALENT
POWERED BY	



PRO POST TOP 3

WATTS	: 2 X 50W
FINISH	: GRAPHITE GREY
MATERIAL	: PC DIFFUSER + DIE CAST ALUMINUM
DIMENSION	: L 920 MM X H 65 MM
IP RATING	: IP65
DRIVER	: PRISHA ISOLATED OR EQUIVALENT
POWERED BY	



PRR POLE 1

FINISH : GRAPHITE GREY
MATERIAL : ALUMINIUM DIE CAST
DIMENSION : H 10 FT. X D 75 MM





PROP U 31

WATTS	: 7W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 85 X H 90 MM
IP RATING	: IP54
LAMP TYPE	: COB
LUMENS	: 560 LM
POWERED BY	CREE



PROP U 32

WATTS	: 12W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 110 X H 100 MM
IP RATING	: IP54
LAMP TYPE	: COB
LUMENS	: 960 LM
POWERED BY	CREE

RECOMMENDED LIGHT LEVELS INDOORS

Office Space		Public Areas	
Normal work station space, open or closed offices	500	Entrance Lobbies, Atria	200
ADP Areas	500	Elevator Lobbies, Public Corridors	200
Conference Rooms	300	Ped. Tunnels and Bridges	200
Training Rooms	500	Stairwells	200
Internal Corridors	200	Support Spaces	
Auditorium	150-200	Toilets	200
Specialty Areas		Staff Locker Rooms	200
Dining Areas	150-200	Storage Rooms, Janitors' Closets	200
Kitchens	500	Electrical Rooms, Generator Rooms	200
Outleased Space	500	Mechanical Rooms	200
Physical Fitness Space	500	Communications Rooms	200
Child Care Centers	500	Maintenance Shops	200
Structured Parking, General Space	50	Loading Docks	200
Structured Parking, Intersections	100	Trash Rooms	200
Structured Parking, Entrances	500		

INGRESS PROTECTION CHART

Degrees of Protection - First Digit

The first digit of the IP code indicates the degree that persons are protected against contact with moving parts (other than smooth rotating shafts, etc.) and the degree that equipment is protected against solid foreign bodies intruding into an enclosure.

FIRST NUMBER	TEST
0	No special protection
1	Protection from a large part of the body such as a hand (but no protection from deliberate access); from solid objects greater than 50mm in diameter.
2	Protection against fingers or other object not greater than 80mm in length and 12mm in diameter.
3	Protection from entry by tools, wires, etc., with a diameter of thickness greater than 1.0mm.
4	Protection from entry by solid objects with a diameter or thickness greater than 1.0mm
5	Protection from the amount of dust that would interfere with the operation of the equipment.
6	Dust tight.

Degrees of Protection - Second Digit

The second digit indicates the degree of protection of the equipment inside the enclosure against the harmful entry of various forms of moisture (e.g. dripping, spraying, submersion, etc.)

FIRST NUMBER	TEST
0	No special protection
1	Protected against sprays of water from any direction, up to 60 degrees from the vertical.
2	Protected against falling drops of water, if the case is disposed up to 15 degrees from the vertical.
3	Protected against sprays of water from any direction, up to 60 degrees from the vertical.
4	Protected against splash water from any direction. Limited ingress permitted.
5	Protected against low pressure water jets from any direction. Limited ingress permitted.
6	Protected against high pressure water jets from any direction. Limited ingress permitted.
7	Protected against short periods of immersion in water - between 15cm and 1m.
8	Protected against long, durable periods of immersion in water, under pressure.

Submersion depth and time must be specified by the end-user. The requirement must be more onerous than IP67

GENERAL TERMS & CONDITIONS:

- Goods are dispatched by us on purchaser's risk. All claims for loss, damage or shortage will be filled by the purchaser directly with the carriers.
- Design changes are a routine practice at Prisha Illumination for better improvement. Data provided may change without any prior intimation. Customers are advised to reconfirm the data or product dimensions before purchase.
- Orders must be placed against confirmed purchase order only.
- Warranty becomes void if the product is improperly applied and if the damage is caused by improper use or installation.
- Fundamental failures that will not be considered for warranty: - Physical damage of any components or product due to improper handling.
- Colour of the product in photo may vary from the actual product.
- Disputes, if any are subject to Ahmedabad jurisdiction.
- All Dealers/Customers are advised to take material/orders after approving physical sample. Dimensions and cut out as mentioned in the catalogue may vary from actual product according to lot. Further no claim will be entertained by Company.

Light should not interpret architecture; it must transform it!
Light should not enhance space and form; it should empower it!
Light is the life-force of man-made structures.
It is through light that events become meaningful.
Light marks our presence as alive and self-aware.
Burned in memory, light is profoundly experienced.”

-Edward P. Bartholomew

Marketed by:

LIGHT | INSIDE PVT LTD

FF-1/2, Maruti Arcade, Shivranjani Cross Roads,
Sattelite, Ahmedabad-380 015. Gujarat. India.

Mob. no.: +91 9687971231 | +91 98254 31492

Email: prishaillumination@lightinside.in | dhaval@lightinside.in

Website: www.prishaillumination.com