



PRISHA
ILLUMINATION



LIGHTS THAT BRIGHTEN UP THE ROOM.

Isn't that what lights are supposed to do?

Prisha illuminations isn't just about lighting, it's about precision. The type of precision that allows the illuminated to embrace the space it shall cater to, built in with flexibility that allows the space to brighten up just right.

With over a decade of experience in the lighting industry, Prisha illuminations caters to its clientele with not only the most premium fixtures but with a niche retail experience, that sets the brand apart. The retail experience is a well thought avenue to allow and initiate interaction with clients and end users, consultants, architects & designers, that empowers Prisha illuminations to build a formidable range of lighting fixtures that answers to today's lighting needs as well as desires.

Immaculately coated, well designed aluminum heat sinks for heat dissipation, acceptable CRI standards especially for retail, and most importantly 'flexibility', are some of the aspects that Prisha Illumination emphasizes on while working on the fixture designs through quality make & fit.

Considering LED has stormed the market in form of energy efficiency, lamps and fixtures, for Prisha illumination environmental viability and optimum efficiency play an important role in the make & fit, and a conscious decision to maintain the same has been taken in manufacturing the ranges.

Prisha Eco Series

PG 6 - 39



PG - 7



PG - 8



PG - 9



PG - 9



PG - 10



PG - 11



PG - 12



PG - 13



PG - 14



PG - 15



PG - 15



PG - 16



PG - 18



PG - 19



PG - 21




PG - 23



PG - 24



PG - 25



PG - 26



PG - 28



PG - 29




PG - 30



PG - 30



PG - 30



PG - 31



PG - 32



PG - 33



PG - 33



PG - 34



PG - 34



PG - 34



PG - 35



PG - 35



PG - 35



PG - 36



PG - 36



PG - 37



PG - 37




PG - 38



PG - 39

Prisha Plus (Architectural Series)

PG 40 - 63



PG - 41



PG - 42




PG - 44



PG - 45



PG - 46



PG - 46



PG - 46



PG - 47



PG - 47



PG - 48



PG - 49



PG - 50



PG - 51



PG - 51



PG - 52




PG - 52



PG - 52



PG - 54



PG - 54



PG - 55



PG - 55



PG - 56



PG - 56



PG - 56



PG - 57



PG - 57




PG - 57



PG - 58



PG - 58



PG - 59



PG - 59



PG - 60



PG - 61



PG - 62




PG - 62



PG - 62



PG - 63



PG - 63

Prisha Prime (Outdoor Series)

PG 64 - 84



Prop Series (Outdoor Series)

PG 85 - 99



ECO SERIES

Prisha Illumination has taken a step into the future, an age and era of the end user centric product make, by introducing Eco series. A range that is cost conscious, efficient and formidable lighting, catering directly to the end user as a one stop shop for lighting fixture of today.

Eco series is an elegant and sharp finish product line, built with the world's leading brands' chipset for enhanced lighting system processors and Aluminum heat sink to make the product efficient in its function along with increased light fixture lifespan.

Used here is Prisha Eco series PRE Spout 2B





PRE GRACE 1A

WATTS	: 7W
FINISH	: MATT WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 120°
CCT(K)	: 3000K, 4000K , 6000K
CRI	: ≥ 80
DIMENSION	: 90 X 30
CUTOUT	: Ø 75 MM
LUMENS	: 630LM
POWERED BY	bridgelux.



PRE GRACE 2A

WATTS	: 16W
FINISH	: MATT WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 120°
CCT(K)	: 3000K, 4000K , 6000K
CRI	: ≥ 80
DIMENSION	: 120 X 30
CUTOUT	: Ø 105 MM
LUMENS	: 1440LM
POWERED BY	bridgelux.



PRE GRACE 3A

WATTS	: 24W
FINISH	: MATT WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 120°
CCT(K)	: 3000K, 4000K , 6000K
CRI	: ≥ 80
DIMENSION	: 170 X 30
CUTOUT	: Ø 155 MM
LUMENS	: 1980LM
POWERED BY	bridgelux.



PRE GRACE 1B

WATTS	: 7W
FINISH	: MATT WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 120°
CCT(K)	: 3000K, 4000K , 6000K
CRI	: ≥ 80
DIMENSION	: 90 X 90 X H 30MM
CUTOUT	: 75 X 75 MM
LUMENS	: 630LM
POWERED BY	



PRE GRACE 2B

WATTS	: 16W
FINISH	: MATT WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 120°
CCT(K)	: 3000K, 4000K , 6000K
CRI	: ≥ 80
DIMENSION	: 120 X 120 X H 30 MM
CUTOUT	: 105 X 105 MM
LUMENS	: 1440LM
POWERED BY	



PRE GRACE 3B

WATTS	: 24W
FINISH	: MATT WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 120°
CCT(K)	: 3000K, 4000K , 6000K
CRI	: ≥ 80
DIMENSION	: 170 X 170 X H 30MM
CUTOUT	: 155 X 155 MM
LUMENS	: 1980LM
POWERED BY	



PRO VEGA 1A - 1B

WATTS	: 12W
FINISH	: WHITE/BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 110°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 80
DIMENSION	: 119 X H 53 MM
CUTOUT	: Ø 110 MM
LUMENS	: 1080LM
DRIVER	: PRISHA OR EQUIVALENT
POWERED BY	bridgelux.

1A - white | 1B - black  CCT adjustable & dimmable



PRO VEGA 2A - 2B

WATTS	: 18W
FINISH	: WHITE/BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 110°
CCT(K)	: 3000K, 4000K, 5000K 6000K
CRI	: ≥ 80
DIMENSION	: 154 X H 53 MM
CUTOUT	: Ø 146 MM
LUMENS	: 1620LM
DRIVER	: PRISHA OR EQUIVALENT
POWERED BY	bridgelux.

2A - white | 2B - black  CCT adjustable & dimmable



PRE NEO 1

WATTS	: 10W
FINISH	: WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 110°
CCT(K)	: 4000K , 6000K
CRI	: ≥ 80
DIMENSION	: 90 X H 58 MM
CUTOUT	: Ø 86 MM
LUMENS	: 1000LM
DRIVER	: PRISHA ISOLATED OR EQUIVALENT
POWERED BY	bridgelux.



PRE NEO 2

WATTS	: 16W
FINISH	: WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 110°
CCT(K)	: 4000K , 6000K
CRI	: ≥ 80
DIMENSION	: 100 X H 58 MM
CUTOUT	: 95 MM
LUMENS	: 1600LM
DRIVER	: PRISHA ISOLATED OR EQUIVALENT
POWERED BY	



PRE COTT 1A

WATTS	: 8W
FINISH	: SAND WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 110°
CCT(K)	: 3000K, 4000K , 6000K
CRI	: ≥ 80
DIMENSION	: 88 X H 23 MM
CUTOUT	: Ø 75 MM
LUMENS	: 720LM
POWERED BY	EPISTAR



PRE COTT 2A

WATTS	: 15W
FINISH	: SAND WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 110°
CCT(K)	: 3000K, 4000K , 6000K
CRI	: ≥ 80
DIMENSION	: 145 x H 23MM
CUTOUT	: Ø 130 MM
LUMENS	: 1350LM
POWERED BY	EPISTAR

22
W**PRE COTT 3A**

WATTS	: 22W
FINISH	: SAND WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 110°
CCT(K)	: 3000K, 4000K , 6000K
CRI	: ≥ 80
DIMENSION	: 170 X H 23 MM
CUTOUT	: Ø 155 MM
LUMENS	: 1980LM
POWERED BY	EPISTAR

08
W**PRE COTT 1B**

WATTS	: 8W
FINISH	: SAND WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 110°
CCT(K)	: 3000K, 4000K , 6000K
CRI	: ≥ 80
DIMENSION	: 88 X 88 X H 23 MM
CUTOUT	: 75 X 75 MM
LUMENS	: 720LM
POWERED BY	EPISTAR

15
W**PRE COTT 2B**

WATTS	: 15W
FINISH	: SAND WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 110°
CCT(K)	: 3000K, 4000K , 6000K
CRI	: ≥ 80
DIMENSION	: 145 X 145 X H 23 MM
CUTOUT	: 130 X 130 MM
LUMENS	: 1350LM
POWERED BY	EPISTAR



PRE COTT 3B

WATTS	: 22W
FINISH	: SAND WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 110°
CCT(K)	: 3000K, 4000K , 6000K
CRI	: ≥ 80
DIMENSION	: 170 X 170 X H 23 MM
CUTOUT	: 155 X 155 MM
LUMENS	: 1980LM
POWERED BY	EPISTAR



PRE COTT 1C

WATTS	: 8W
FINISH	: SAND WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 110°
CCT(K)	: 3000K, 4000K , 6000K
CRI	: ≥ 80
DIMENSION	: 88 X H 30 MM
LUMENS	: 720LM
POWERED BY	EPISTAR



PRE COTT 2C

WATTS	: 15W
FINISH	: SAND WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 110°
CCT(K)	: 3000K, 4000K , 6000K
CRI	: ≥ 80
DIMENSION	: 145 X H 30 MM
LUMENS	: 1350LM
POWERED BY	EPISTAR

22
W**PRE COTT 3C**

WATTS	: 22W
FINISH	: SAND WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 110°
CCT(K)	: 3000K, 4000K , 6000K
CRI	: ≥ 80
DIMENSION	: 170 X H 30MM
LUMENS	: 1980LM
POWERED BY	EPISTAR

08
W**PRE COTT 1D**

WATTS	: 8W
FINISH	: SAND WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 110°
CCT(K)	: 3000K, 4000K , 6000K
CRI	: ≥ 80
DIMENSION	: 88 X 88 X H 30MM
LUMENS	: 720LM
POWERED BY	EPISTAR

15
W**PRE COTT 2D**

WATTS	: 15W
FINISH	: SAND WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 110°
CCT(K)	: 3000K, 4000K , 6000K
CRI	: ≥ 80
DIMENSION	: 145 X 145 X H 30MM
LUMENS	: 1350LM
POWERED BY	EPISTAR



PRE COTT 3D

WATTS	: 22W
FINISH	: SAND WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 110°
CCT(K)	: 3000K, 4000K, 6000K
CRI	: ≥ 80
DIMENSION	: 170 X 170 X H 30 MM
LUMENS	: 1980LM
POWERED BY	EPISTAR



PRE TUBO 1A - 1B

WATTS	: 8W
FINISH & MATERIAL	: SAND WHITE / BLACK
BEAM ANGLE	: 120°
CCT(K)	: 4000K, 6000K
CRI	: ≥ 80
DIMENSION	: 100 X H 50 MM
LUMENS	: 720LM
POWERED BY	bridgelux

1A - white | 1B - black



PRE TUBO 2A - 2B

WATTS	: 15W
FINISH & MATERIAL	: SAND WHITE/ BLACK
BEAM ANGLE	: 120°
CCT(K)	: 4000K, 6000K
CRI	: ≥ 80
DIMENSION	: 125 X H 50 MM
LUMENS	: 1350LM
POWERED BY	bridgelux

2A - white | 2B - black



PRE DIVA 1A - 1B

WATTS	: 12W
FINISH	: WHITE / BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 120°
CCT(K)	: 3000K, 4000K , 6000K
CRI	: ≥ 80
DIMENSION	: 80 X H 75 MM
LUMENS	: 1080LM
DRIVER	: PHILIPS OR EQUIVALENT
POWERED BY	

1A - white | 1B - black



PRE DIVA 2A - 2B

WATTS	: 18W
FINISH	: WHITE / BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 120°
CCT(K)	: 3000K, 4000K , 6000K
CRI	: ≥ 80
DIMENSION	: 110 X H 90 MM
LUMENS	: 1620LM
DRIVER	: PHILIPS OR EQUIVALENT
POWERED BY	

2A - white | 2B - black



PRE COM 1A - 1B

WATTS	: 3W
FINISH	: MATT WHITE / BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K , 6000K
CRI	: ≥ 85
DIMENSION	: 37 X H 26 MM
CUTOUT	: Ø 32 MM
LUMENS	: 270LM
POWERED BY	bridgelux.

1A - white | 1B - black



PRE COSTA 1

WATTS	: 3W
FINISH	: MATT WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K , 6000K
CRI	: ≥ 85
DIMENSION	: 65 X H 40 MM
CUTOUT	: Ø 55 MM
LUMENS	: 270LM
POWERED BY	bridgelux.



PRE COSTA 2

WATTS	: 7W
FINISH	: MATT WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K 6000K
CRI	: ≥ 85
DIMENSION	: 85 X H 60 MM
CUTOUT	: Ø 75 MM
LUMENS	: 630LM
POWERED BY	bridgelux.



CCT adjustable & dimmable



PRE COSTA 3

WATTS	: 12W
FINISH	: MATT WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K 6000K
CRI	: ≥ 85
DIMENSION	: 108 X H 68 MM
CUTOUT	: Ø 95 MM
LUMENS	: 1080LM
POWERED BY	bridgelux.



CCT adjustable & dimmable



PRE COSTA 4

WATTS	: 18W
FINISH	: MATT WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K 6000K
CRI	: ≥ 85
DIMENSION	: 128 X H 80 MM
CUTOUT	: Ø 116 MM
LUMENS	: 1620LM
POWERED BY	bridgelux.



CCT adjustable & dimmable



PRE COSTA 5

WATTS	: 24W
FINISH	: MATT WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K 6000K
CRI	: ≥ 85
DIMENSION	: 136 X H 80 MM
CUTOUT	: Ø 120 MM
LUMENS	: 2160LM
POWERED BY	bridgelux.



PRE DIVINE 1

WATTS	: 7W
FINISH	: MATT WHITE WITH GREY
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 60 X H 64 MM
CUTOUT	: Ø 52 MM
LUMENS	: 630LM
POWER FACTOR	: ≥ 0.95
POWERED BY	bridgelux.



CCT adjustable & dimmable



PRE DIVINE 2

WATTS	: 12W
FINISH	: MATT WHITE WITH GREY
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 82 X H 80 MM
CUTOUT	: Ø 75 MM
LUMENS	: 1080LM
POWER FACTOR	: ≥ 0.95
POWERED BY	bridgelux.



CCT adjustable & dimmable



PRE DIVINE 3

WATTS	: 18W
FINISH	: MATT WHITE WITH GREY
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 95 X H 100 MM
CUTOUT	: Ø 87 MM
LUMENS	: 1620LM
POWER FACTOR	: ≥ 0.95
POWERED BY	bridgelux.



CCT adjustable & dimmable

07
W

PRE DIVITE 1

WATTS	: 7W
FINISH	: MATT WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 60 X H 64 MM
CUTOUT	: Ø 52 MM
LUMENS	: 630LM
POWERED BY	bridgelux.



CCT adjustable & dimmable

12
W

PRE DIVITE 2

WATTS	: 12W
FINISH	: MATT WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 82 X H 80 MM
CUTOUT	: Ø 75 MM
LUMENS	: 1080LM
POWERED BY	bridgelux.



CCT adjustable & dimmable

18
W


PRE DIVITE 3

WATTS	: 18W
FINISH	: MATT WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 95 X H 100 MM
CUTOUT	: Ø 87 MM
LUMENS	: 1620LM
POWERED BY	bridgelux.



CCT adjustable & dimmable

*Used here is Prisha Eco
series PRE Cost*

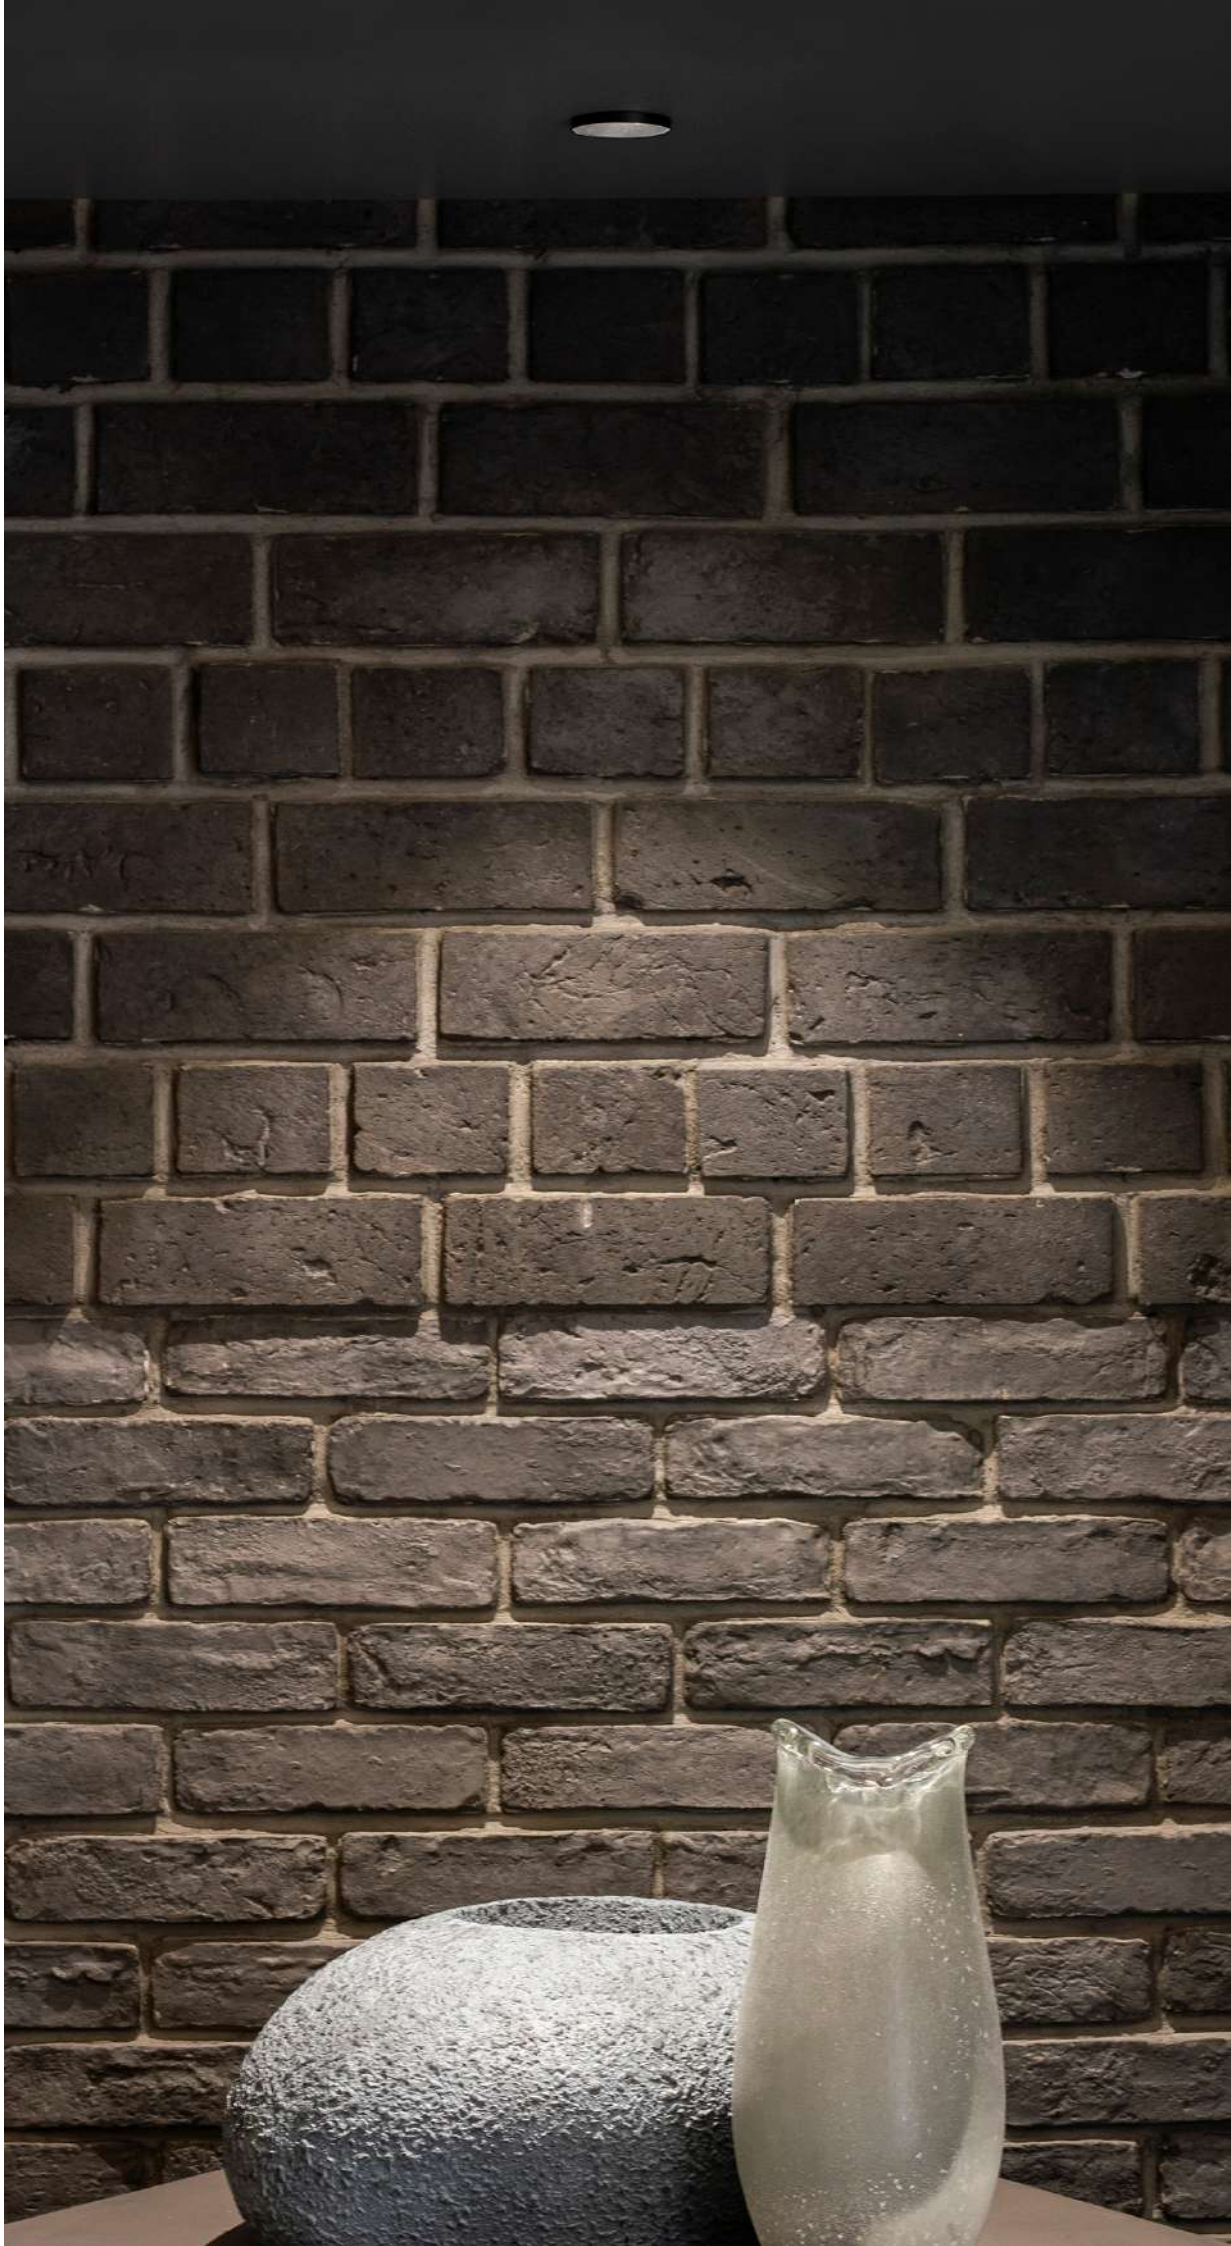

07
W**PRE DIVITE 1B**

WATTS	: 7W
FINISH	: MATT BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 60 X H 64 MM
CUTOUT	: Ø 52 MM
LUMENS	: 630LM
POWERED BY	bridgelux.



CCT adjustable & dimmable

12
W**PRE DIVITE 2B**

WATTS	: 12W
FINISH	: MATT BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 82 X H 80 MM
CUTOUT	: Ø 75 MM
LUMENS	: 1080LM
POWERED BY	bridgelux.




CCT adjustable & dimmable

18
W**PRE DIVITE 3B**

WATTS	: 18W
FINISH	: MATT BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 95 X H 100 MM
CUTOUT	: Ø 87 MM
LUMENS	: 1620LM
POWERED BY	bridgelux.



CCT adjustable & dimmable

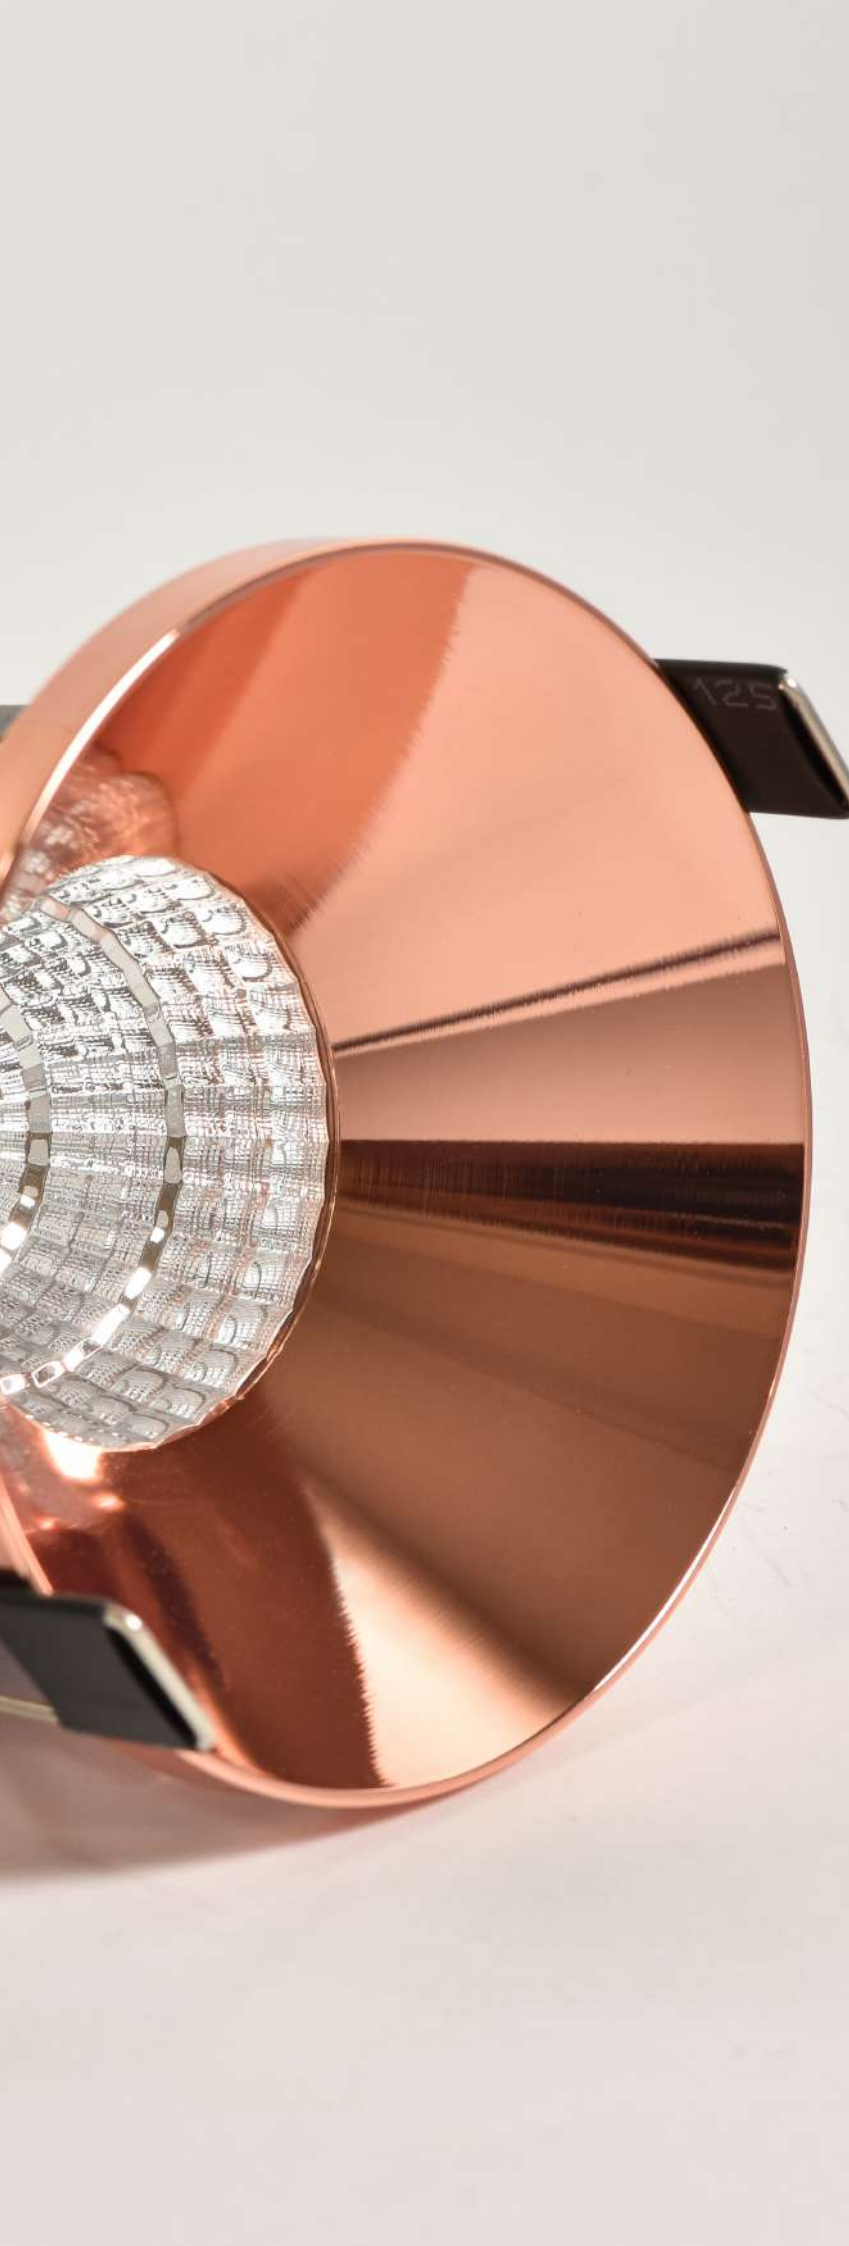

07
W**PRE COST 1**

WATTS	: 7W
FINISH	: MATT WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 59 X H 60 MM
CUTOUT	: Ø 52 MM
LUMENS	: 630LM
POWERED BY	bridgelux.



CCT adjustable & dimmable

12
W**PRE COST 2**

WATTS	: 12W
FINISH	: MATT WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 82 X H 71 MM
CUTOUT	: Ø 72 MM
LUMENS	: 1080LM
POWERED BY	bridgelux.



CCT adjustable & dimmable

18
W**PRE COST 3**

WATTS	: 18W
FINISH	: MATT WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 98 X H 86 MM
CUTOUT	: Ø 90 MM
LUMENS	: 1620LM
POWERED BY	bridgelux.



CCT adjustable & dimmable

30
W**PRE COST 4**

WATTS	: 30W
FINISH	: MATT WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 118 X H 125 MM
CUTOUT	: Ø 106 MM
LUMENS	: 2700LM
POWERED BY	bridgelux.



CCT adjustable & dimmable



PRE COST 1B

WATTS : 7W
FINISH : MATT BLACK
MATERIAL : ALUMINIUM
BEAM ANGLE : 36°
CCT(K) : 3000K, 4000K, 5000K, 6000K
CRI : ≥ 85
DIMENSION : 59 X H 60 MM
CUTOUT : Ø 52 MM
LUMENS : 630LM
POWERED BY

PRE COST 2B

WATTS : 12W
FINISH : MATT BLACK
MATERIAL : ALUMINIUM
BEAM ANGLE : 36°
CCT(K) : 3000K, 4000K, 5000K, 6000K
CRI : ≥ 85
DIMENSION : 82 X H 71 MM
CUTOUT : Ø 72 MM
LUMENS : 1080LM
POWERED BY

PRE COST 3B

WATTS : 18W
FINISH : MATT BLACK
MATERIAL : ALUMINIUM
BEAM ANGLE : 36°
CCT(K) : 3000K, 4000K, 5000K, 6000K
CRI : ≥ 85
DIMENSION : 98 X H 86 MM
CUTOUT : Ø 90 MM
LUMENS : 1620LM
POWERED BY



CCT adjustable & dimmable



CCT adjustable & dimmable



CCT adjustable & dimmable



PRE GOLD 1

WATTS : 7W
FINISH : ROSE GOLD
MATERIAL : ALUMINIUM
BEAM ANGLE : 36°
CCT(K) : 3000K, 4000K, 5000K, 6000K
CRI : ≥ 85
DIMENSION : 59 X H 60 MM
CUTOUT : Ø 52 MM
LUMENS : 630LM
POWERED BY

PRE GOLD 2

WATTS : 12W
FINISH : ROSE GOLD
MATERIAL : ALUMINIUM
BEAM ANGLE : 36°
CCT(K) : 3000K, 4000K, 5000K, 6000K
CRI : ≥ 85
DIMENSION : 82 X H 71 MM
CUTOUT : Ø 72 MM
LUMENS : 1080LM
POWERED BY

PRE GOLD 3

WATTS : 18W
FINISH : ROSE GOLD
MATERIAL : ALUMINIUM
BEAM ANGLE : 36°
CCT(K) : 3000K, 4000K, 5000K, 6000K
CRI : ≥ 85
DIMENSION : 98 X H 86 MM
CUTOUT : Ø 90 MM
LUMENS : 1620LM
POWERED BY



CCT adjustable & dimmable



CCT adjustable & dimmable



CCT adjustable & dimmable



PRE COIN 1

WATTS	: 7W
FINISH	: MATT WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 70 X H 53 MM
CUTOUT	: Ø 60 MM
LUMENS	: 630LM
POWERED BY	bridgelux.



CCT adjustable & dimmable



PRE COIN 2

WATTS	: 12W
FINISH	: MATT WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 92 X H 75 MM
CUTOUT	: Ø 75 MM
LUMENS	: 1080LM
POWERED BY	bridgelux.



CCT adjustable & dimmable



PRE COIN 3

WATTS	: 18W
FINISH	: MATT WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 110 X H 76 MM
CUTOUT	: Ø 80 MM
LUMENS	: 1620LM
POWERED BY	bridgelux.



CCT adjustable & dimmable



PRE COLI

WATTS	: 12W
FINISH	: MATT WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 6000K
CRI	: ≥ 85
DIMENSION	: 100 X H 74 MM
CUTOUT	: Ø 90 MM
LUMENS	: 1080LM
POWERED BY	bridgelux.

CTT COLOUR CHANGING






PRE LEAD 1A - 1B (SUSPENDED)

WATTS	: 18W
FINISH & MATERIAL	: MATT WHITE / BLACK
DIFFUSER	: PREMIUM HIGH TRANSMISSION PC
BEAM ANGLE	: 110°
CCT(K)	: 3000K, 4000K, 6000K
CRI	: ≥ 80
DIMENSION	: 590 X 50 X H 70 MM
DRIVER	: PRISHA ISOLATED
POWERED BY	: 

1A - white | 1B - black

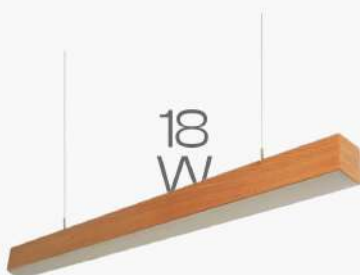

PRE LEAD 1C (SUSPENDED)

WATTS	: 18W
FINISH & MATERIAL	: WOODEN
DIFFUSER	: PREMIUM HIGH TRANSMISSION PC
BEAM ANGLE	: 110°
CCT(K)	: 3000K, 4000K, 6000K
CRI	: ≥ 80
DIMENSION	: 590 X 50 X H 70 MM
DRIVER	: PRISHA ISOLATED
POWERED BY	: 



PRE LEAD 2A - 2B (SUSPENDED)

WATTS	: 36W
FINISH & MATERIAL	: MATT WHITE / BLACK
DIFFUSER	: PREMIUM HIGH TRANSMISSION PC
BEAM ANGLE	: 110°
CCT(K)	: 3000K, 4000K, 6000K
CRI	: ≥ 80
DIMENSION	: 1180 X 50 X H 70 MM
DRIVER	: PRISHA ISOLATED
POWERED BY	: 

2A - white | 2B - black



PRE LEAD 2C (SUSPENDED)

WATTS	: 18W
FINISH & MATERIAL	: WOODEN
DIFFUSER	: PREMIUM HIGH TRANSMISSION PC
BEAM ANGLE	: 110°
CCT(K)	: 3000K, 4000K, 6000K
CRI	: ≥ 80
DIMENSION	: 1180 X 50 X H 70 MM
DRIVER	: PRISHA ISOLATED
POWERED BY	: 



PRE BASILIO 1

WATTS	: 7W
FINISH	: MATT WHITE & BLACK
MATERIAL	: ALUMINIUM
REFLECTOR	: CHROME, CHAMPAGNE, GOLD, COPPER, WHITE, BLACK
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 54 X H 75 MM
LUMENS	: 630LM
POWERED BY	

PRE BASILIO 2

WATTS	: 12W
FINISH	: MATT WHITE & BLACK
MATERIAL	: ALUMINIUM
REFLECTOR	: CHROME, CHAMPAGNE, GOLD, COPPER, WHITE, BLACK
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 76 X H 100 MM
LUMENS	: 1080LM
POWERED BY	

PRE BASILIO 3

WATTS	: 18W
FINISH	: MATT WHITE & BLACK
MATERIAL	: ALUMINIUM
REFLECTOR	: CHROME, CHAMPAGNE, GOLD, COPPER, WHITE, BLACK
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 94 X H 120 MM
LUMENS	: 1620LM
POWERED BY	



PRE PLUTO 1

WATTS	: 7W
FINISH	: IVORY WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 80
DIMENSION	: 65 X H 52 MM
CUTOUT	: Ø 55 MM
LUMENS	: 630LM
POWERED BY	bridgelux.



CCT adjustable & dimmable



PRE PLUTO 2

WATT	: 12W
FINISH	: IVORY WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 80
DIMENSION	: 83 X H 61 MM
CUTOUT	: Ø 75 MM
LUMENS	: 1080LM
POWERED BY	bridgelux.



CCT adjustable & dimmable



PRE PASSION 1

WATTS	: 7W
FINISH	: IVORY WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 80
DIMENSION	: 65 X H 46 MM
CUTOUT	: Ø 55 MM
LUMENS	: 630LM
POWERED BY	bridgelux.



CCT adjustable & dimmable



PRE PASSION 2

WATTS	: 12W
FINISH	: IVORY WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 80
DIMENSION	: 84 X H 60 MM
CUTOUT	: Ø 75 MM
LUMENS	: 1080LM
POWERED BY	bridgelux.



CCT adjustable & dimmable



PRE PLATINA 1

WATTS	: 7W
FINISH	: IVORY WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 80
DIMENSION	: 65 X H 55 MM
CUTOUT	: Ø 55 MM
LUMENS	: 630LM
POWERED BY	bridgelux.



CCT adjustable & dimmable



PRE PLATINA 2

WATTS	: 12W
FINISH	: IVORY WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 80
DIMENSION	: 80 X H 69 MM
CUTOUT	: Ø 75 MM
LUMENS	: 1080LM
POWERED BY	bridgelux.



CCT adjustable & dimmable



PRE COLOUR 1A - 1B

WATTS	: 5W
FINISH	: ROSE GOLD / SATIN BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 30°
CCT(K)	: 3000K, 4000K
CRI	: ≥ 80
DIMENSION	: 46 X H 60 MM
CUTOUT	: Ø 40 MM
LUMENS	: 450LM
POWERED BY	EPISTAR

1A - rose gold | 1B - satin black



PRE COLOUR 2A - 2B

WATTS	: 12W
FINISH	: ROSE GOLD / SATIN BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 30°
CCT(K)	: 3000K, 4000K
CRI	: ≥ 80
DIMENSION	: 60 X H 83 MM
CUTOUT	: Ø 55 MM
LUMENS	: 1080LM
POWERED BY	EPISTAR

2A - rose gold | 2B - satin black



PRE COMPASS 1

WATTS	: 9W
FINISH	: WHITE BODY - BLACK REFLECTOR
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 30°
CCT(K)	: 3000K, 4000K
CRI	: ≥ 80
DIMENSION	: 67 X H 65 MM
CUTOUT	: Ø 55 MM
LUMENS	: 810LM
POWERED BY	bridgelux.



PRE COMPASS 2

WATTS	: 9W
FINISH	: WHITE BODY - BLACK REFLECTOR
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 30°
CCT(K)	: 3000K, 4000K
CRI	: ≥ 80
DIMENSION	: 67 X 67 X H 65 MM
CUTOUT	: 55 X 55 MM
LUMENS	: 810LM
POWERED BY	bridgelux.

27
W

PRE COMPASS 3

WATTS	: 9W X 3 = 27W
FINISH	: WHITE BODY - BLACK REFLECTOR
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 30°
CCT(K)	: 3000K, 4000K
CRI	: ≥ 80
DIMENSION	: 159 X 67 X H 60 MM
CUTOUT	: 150 X 60 MM
LUMENS	: 2160LM
POWERED BY	bridgelux.

45
W

PRE COMPASS 4

WATTS	: 9W X 5 = 45W
FINISH	: WHITE BODY - BLACK REFLECTOR
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 30°
CCT(K)	: 3000K, 4000K
CRI	: ≥ 80
DIMENSION	: 253 X 67 X H 65 MM
CUTOUT	: 245 X 60 MM
LUMENS	: 3600LM
POWERED BY	bridgelux.

06
W

PRE TINO

WATTS	: 6W
FINISH	: WHITE
MATERIAL	: ALUMINIUM + PMMA LENS + ACRYLIC COVER
BEAM ANGLE	: 30°
CCT(K)	: 3000K, 4000K
CRI	: ≥ 80
DIMENSION	: 92 X H 58 MM
CUTOUT	: Ø 65 MM
LUMENS	: 520LM
POWER	: DOB DRIVER 220~240V
POWERED BY	: SANAN



PRE RECO

WATTS	: 6W
FINISH	: WHITE WITH CHROME
MATERIAL	: ALUMINIUM + PMMA LENS + PC REFLECTIVE CUP
BEAM ANGLE	: 30°
CCT(K)	: 3000K, 4000K
CRI	: ≥ 80
DIMENSION	: 89 X H 52 MM
CUTOUT	: Ø 65 MM
LUMENS	: 400LM
POWER	: DOB DRIVER 220~240V
POWERED BY	: SANAN



PRE PURE

WATT	: 7W
FINISH	: MATT BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 80
DIMENSION	: 60 X H 52 MM
CUTOUT	: Ø 50 MM
LUMENS	: 630LM
POWERED BY	: 



CCT adjustable & dimmable



PRE DOMO 1A - 1B

WATTS	: 12W
FINISH	: WHITE / BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K
CRI	: ≥ 90
DIMENSION	: 90 X H 100 MM
CUTOUT	: Ø 75 MM
LUMENS	: 1320LM
POWERED BY	: 

1A - white | 1B - black



PRE DOMO 2A - 2B

WATTS	: 12W X 2 = 24w
FINISH	: WHITE / BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K
CRI	: ≥ 90
DIMENSION	: 170 X 90 X H 100 MM
CUTOUT	: 155 X 75 MM
LUMENS	: 2640LM
POWERED BY	: 

2A - white | 2B - black



PRE SPOUT 1A - 1B

WATTS	: 12W
FINISH	: MATT WHITE / BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 80
DIMENSION	: 90 X H 95 MM
CUTOUT	: Ø 83 MM
LUMENS	: 1080LM
POWERED BY	bridgelux.

1A - white | 1B - black



CCT adjustable & dimmable



PRE SPOUT 2A - 2B

WATTS	: 12w X 2 = 24W
FINISH	: MATT WHITE / BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 80
DIMENSION	: 175 X 95 X H 95 MM
CUTOUT	: 167 X H 82 MM
LUMENS	: 2160LM
POWERED BY	bridgelux.

2A - white | 2B - black



CCT adjustable & dimmable



PRO SCOTT

WATTS	: 15W
FINISH	: MATT WHITE
MATERIAL	: ALUMINIUM
REFLECTOR	: ANTI GLARE OPTICAL REFLECTOR
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 80
DIMENSION	: 73 X H 118 MM
CUTOUT	: Ø 65 MM
LUMENS	: 1350LM
ADJUSTABLE ANGLE	: LAMP HEAD 0 ~ 80° / 340°
DRIVER	: PHILIPS OR EQUIVALENT
POWERED BY	CREE



PRO SCOOP 1

WATTS	: 15W
FINISH	: WHITE
MATERIAL	: ALUMINIUM
REFLECTOR	: ANTI GLARE OPTICAL REFLECTOR
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 80
DIMENSION	: 98 X H 120 MM
CUTOUT	: Ø 90 MM
LUMENS	: 1350LM
ADJUSTABLE ANGLE	: LAMP HEAD 0 ~ 80° / 340°
DRIVER	: PHILIPS OR EQUIVALENT
POWERED BY	CREE



PRO SCOOP 2

WATTS	: 15W X 2 = 30W
FINISH	: WHITE
MATERIAL	: ALUMINIUM
REFLECTOR	: ANTI GLARE OPTICAL REFLECTOR
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 80
DIMENSION	: 185 X 100 X H 120 MM
CUTOUT	: 175 X H 90 MM
LUMENS	: 2700LM
ADJUSTABLE ANGLE	: LAMP HEAD 0 ~ 80° / 340°
DRIVER	: PHILIPS OR EQUIVALENT
POWERED BY	CREE



PRO SCOOPER 1

WATTS	: 25W
FINISH	: WHITE
MATERIAL	: ALUMINIUM
REFLECTOR	: ANTI GLARE OPTICAL REFLECTOR
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 80
DIMENSION	: 130 X H 135 MM
CUTOUT	: Ø 120 MM
LUMENS	: 2250LM
ADJUSTABLE ANGLE	: LAMP HEAD 0 ~ 80° / 340°
DRIVER	: PHILIPS OR EQUIVALENT
POWERED BY	CREE



PRO NOSSEL 1A - 1B

WATTS	: 7W
FINISH	: WHITE / BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 34°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 80
DIMENSION	: 91 X H 90 MM
CUTOUT	: Ø 83 MM
LUMENS	: 720LM
ADJUSTABLE ANGLE	: LAMP HEAD 0 ~ 20° / 360°
DRIVER	: PHILIPS OR EQUIVALENT
POWERED BY	CREE

1A - white | 1B - black



PRO NOSSEL 2A - 2B

WATTS	: 15W
FINISH	: WHITE / BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 34°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 80
DIMENSION	: 91 X H 110 MM
CUTOUT	: Ø 83 MM
LUMENS	: 1350LM
ADJUSTABLE ANGLE	: LAMP HEAD 0 ~ 20° / 360°
DRIVER	: PHILIPS OR EQUIVALENT
POWERED BY	CREE

2A - white | 2B - black



PRO SCREW DRIVER NEW

WATTS	: 12W
FINISH	: WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 80
DIMENSION	: 85 X H 95 MM
LUMENS	: 1350LM
ADJUSTABLE ANGLE	: LAMP HEAD 0 ~ 80° / 340°
DRIVER	: PHILIPS OR EQUIVALENT
POWERED BY	CREE



PRO SCREW DRIVER MINI

WATTS	: 12W
FINISH	: WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 80
DIMENSION	: 74 X H 88 MM
LUMENS	: 1350LM
ADJUSTABLE ANGLE	: LAMP HEAD 0 ~ 80° / 340°
DRIVER	: PHILIPS OR EQUIVALENT
POWERED BY	CREE



PRO SCREW RD NEW

WATTS	: 12W
FINISH	: WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 80
DIMENSION	: 85 X H 71 MM
CUTOUT	: Ø 78 MM
LUMENS	: 1350LM
ADJUSTABLE ANGLE	: LAMP HEAD 0 ~ 80° / 340°
DRIVER	: FULHAM OR EQUIVALENT
POWERED BY	CREE



PRE LOOP 1A - 1B

WATTS	: 12W
FINISH	: SAND WHITE / BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 60 X H 113 MM
LUMENS	: 1080LM
POWERED BY	bridgelux.

1A - white | 1B - black



PRE LOOP 2A - 2B

WATTS	: 18W
FINISH	: SAND WHITE / BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K, 6000K
CRI	: ≥ 85
DIMENSION	: 80 X H 134 MM
LUMENS	: 1620LM
POWERED BY	bridgelux.

2A - white | 2B - black



PRE LOOP 3A - 3B

WATTS	: 30W
FINISH	: SAND WHITE / BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 6000K
CRI	: ≥ 85
DIMENSION	: 95 X H 140 MM
LUMENS	: 2700LM
POWERED BY	bridgelux.

3A - white | 3B - black

PRISHA PLUS

Prisha Illumination prides itself at presenting the most fashionable elements into the commercial lighting industry. We are associated with suppliers from all over the world that bring with them a supply bandwidth of leading global Brands in led, drivers and other auxiliaries to our fixtures assembly. Which in turn allows us to guarantee the luminance, lighting effects, lifespan and thermal performance, that helps us achieve the reputation we worked for as the quality conscious leaders of the industry.

Plus Architectural series is a range immaculately coated, with well designed aluminum heat sink for heat dissipation that adheres to acceptable CRI standard especially for retail.


Used here is Prisha Plus series PRR Ludo 6





PRR GLEAM 1

WATTS	: 10W FIXED
FINISH	: MATT WHITE
MATERIAL	: ALUMINIUM GLARELESS REFLECTOR
BEAM ANGLE	: 36° OR 15°
CCT(K)	: 3000K, 4000K, 5000K
CRI	: ≥ 90
DIMENSION	: 72 X H 76 MM
CUT-OUT	: Ø 65
LUMENS	: 1200LM
DRIVER	: FULHAM OR EQUIVALENT
POWERED BY	CREE




REFLECTOR - SHINE BLACK / CHROME



PRR GLEAM 2

WATTS	: 15W FIXED
FINISH	: MATT WHITE
MATERIAL	: ALUMINIUM GLARELESS REFLECTOR
BEAM ANGLE	: 36° OR 15°
CCT(K)	: 3000K, 4000K, 5000K
CRI	: ≥ 90
DIMENSION	: 88 X H 88 MM
CUT-OUT	: Ø 80 MM
LUMENS	: 1800LM
DRIVER	: FULHAM OR EQUIVALENT
POWERED BY	CREE



REFLECTOR - SHINE BLACK / CHROME





PRR GLOW 1A/1B

WATTS	: 8W ADJUSTABLE
FINISH	: WHITE / BLACK
MATERIAL	: ALUMINIUM
REFLECTOR	: MATT WHITE, MATT BLACK, CHROME & SHINE BLACK
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K
CRI	: ≥ 90
DIMENSION	: 82 X H 46 MM
CUT-OUT	: Ø 75
LUMENS	: 960LM
DRIVER	: FULHAM OR EQUIVALENT
POWERED BY	CREE

1A - white | 1B - black



PRR GLOW 2A/2B

WATTS	: 12W ADJUSTABLE
FINISH	: WHITE / BLACK
MATERIAL	: ALUMINIUM
REFLECTOR	: MATT WHITE, MATT BLACK, CHROME & SHINE BLACK
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K, 5000K
CRI	: ≥ 90
DIMENSION	: 82 X H 46 MM
CUT-OUT	: Ø 75
LUMENS	: 1440LM
DRIVER	: FULHAM OR EQUIVALENT
POWERED BY	CREE

2A - white | 2B - black




PRR GLEN 1

WATTS	: 10W (ADJUSTABLE)
FINISH	: CHROME (ANTI GLARE)
MATERIAL	: ALUMINIUM GLARELESS REFLECTOR
BEAM ANGLE	: 36° OR 15°
CCT(K)	: 3000K, 4000K, 5000K
CRI	: ≥ 90
DIMENSION	: 77 X 65 H MM
CUT-OUT	: Ø 77
LUMENS	: 960LM
DRIVER	: FULHAM OR EQUIVALENT
POWERED BY	CREE




PRR GLADE ELITE 1

WATTS : 7W
FINISH : MATT GREY + WHITE
MATERIAL : ALUMINIUM
BEAM ANGLE : 15° OR 38° OR 60°
CCT(K) : 3000K, 4000K, 5000K
CRI : ≥ 90
DIMENSION : Ø 70 X H 65 MM
CUT-OUT : Ø 60 MM
LUMENS : 840LM
DRIVER : FULHAM OR EQUIVALENT
POWERED BY **CREE**




PRR GLADE ELITE 2

WATTS : 12W
FINISH : MATT GREY + WHITE
MATERIAL : ALUMINIUM
BEAM ANGLE : 15° OR 38° OR 60°
CCT(K) : 3000K, 4000K, 5000K
CRI : ≥ 90
DIMENSION : Ø 85 X H 75 MM
CUT-OUT : Ø 75 MM
LUMENS : 1440LM
DRIVER : FULHAM OR EQUIVALENT
POWERED BY **CREE**



PRR GLADE ELITE 3


WATTS : 20W
FINISH : MATT GREY + WHITE
MATERIAL : ALUMINIUM
BEAM ANGLE : 15° OR 38° OR 60°
CCT(K) : 3000K, 4000K, 5000K
CRI : ≥ 90
DIMENSION : Ø 95 X H 85 MM
CUT-OUT : Ø 85 MM
LUMENS : 2400LM
DRIVER : FULHAM OR EQUIVALENT
POWERED BY **CREE**



07
W

PRR GLASSO

WATTS	: 7W
FINISH	: SAND WHITE + SMOKY GREY
MATERIAL	: ALUMINIUM + GLASS
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K,
CRI	: ≥ 90
DIMENSION	: 42 X H 103 MM
GLASS DIMENSION	: 30 X 41 MM
CUT-OUT	: Ø 35 MM
LUMENS	: 630LM



PRR SPIN

WATTS	: 3W / 7W
FINISH	: BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 20° TO 55° (ADJUSTABLE)
CCT(K)	: 3000K, 4000K
CRI	: ≥ 90
DIMENSION	: 55 X H 70 MM
CUT-OUT	: 50 MM
LUMENS	: 270LM / 630LM
POWERED BY	: OSRAM OSLOM OR EQUIVALENT

09
W



PRR GINI 1A - 1B

WATTS	: 9W
FINISH	: SAND WHITE + BLACK / BLACK + BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 15° OR 36°
CCT(K)	: 3000K, 4000K, 5000K
CRI	: ≥ 90
DIMENSION	: 44 X H 90 MM
CUT-OUT	: Ø 40
LUMENS	: 960LM
DRIVER	: PRISHA
POWERED BY	: CREE


1A - white | 1B - black

07
W**PRQ 14 (ROUND)**

WATTS	: 7W
FINISH	: SAND WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K, 5000K
CRI	: RA>80
DIMENSION	: 82 X H 92 MM
CUT-OUT	: Ø 75MM
LUMENS	: 630LM

12
W**PRQ 14 PLUS (ROUND)**

WATTS	: 12W
FINISH	: SAND WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K, 5000K
CRI	: RA>80
DIMENSION	: 108 X H 108 MM
CUT-OUT	: Ø 100MM
LUMENS	: 1190LM

07
W**PRQ 13**

WATTS	: 7W
FINISH	: SAND WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K, 5000K
CRI	: RA>80
DIMENSION	: 84 X H 90 MM
CUT-OUT	: Ø 55 MM
LUMENS	: 630LM



PRR OPTICAL 1

WATTS	: 8W
FINISH	: WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 15° OR 38° OR 60°
CCT(K)	: 3000K, 4000K, 5000K
CRI	: ≥ 90
DIMENSION	: Ø 62 X H 85 MM
CUT-OUT	: Ø 55 MM
LUMENS	: 840LM
DRIVER	: FULHAM OR EQUIVALENT
POWERED BY	CREE



PRR OPTICAL 2

WATTS	: 12W
FINISH	: WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 15° OR 38° OR 60°
CCT(K)	: 3000K, 4000K, 5000K
CRI	: ≥ 90
DIMENSION	: Ø 84 X H 100 MM
CUT-OUT	: Ø 75 MM
LUMENS	: 1440LM
DRIVER	: FULHAM OR EQUIVALENT
POWERED BY	CREE



PRR OPTICAL 3

WATTS	: 20W
FINISH	: WHITE
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 15° OR 38° OR 60°
CCT(K)	: 3000K, 4000K, 5000K
CRI	: ≥ 90
DIMENSION	: Ø 110 X H 128 MM
CUT-OUT	: Ø 95 MM
LUMENS	: 2440LM
DRIVER	: FULHAM OR EQUIVALENT
POWERED BY	CREE



PRR LUXUS 1

WATTS	: 8W
FINISH	: WHITE
REFLECTOR	: BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 15° OR 38° OR 60°
CCT(K)	: 3000K, 4000K, 5000K
CRI	: ≥ 90
DIMENSION	: Ø 62 X H 86 MM
CUT-OUT	: Ø 55 MM
LUMENS	: 840LM
DRIVER	: FULHAM OR EQUIVALENT
POWERED BY	CREE



PRR LUXUS 2

WATTS	: 12W
FINISH	: WHITE
REFLECTOR	: BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 15° OR 38° OR 60°
CCT(K)	: 3000K, 4000K, 5000K
CRI	: ≥ 90
DIMENSION	: Ø 84 X H 104 MM
CUT-OUT	: Ø 75 MM
LUMENS	: 1440LM
DRIVER	: FULHAM OR EQUIVALENT
POWERED BY	CREE




PRR LUXUS 3

WATTS	: 20W
FINISH	: WHITE
REFLECTOR	: BLACK
MATERIAL	: ALUMINIUM
BEAM ANGLE	: 15° OR 38° OR 60°
CCT(K)	: 3000K, 4000K, 5000K
CRI	: ≥ 90
DIMENSION	: Ø 110 X H 127 MM
CUT-OUT	: Ø 95 MM
LUMENS	: 2400LM
DRIVER	: FULHAM OR EQUIVALENT
POWERED BY	CREE


PRR CUP 1

WATTS	: 10W
MATERIAL	: ALUMINIUM
INPUT	: AC170-250V, 50-60Hz
BEAM ANGLE	: 38°
CCT(K)	: 3000K, 4000K, 5000K
CRI	: RA>92
DIMENSION	: 120 X H 85 MM
CUT-OUT	: Ø 110MM
LUMENS	: 900LM

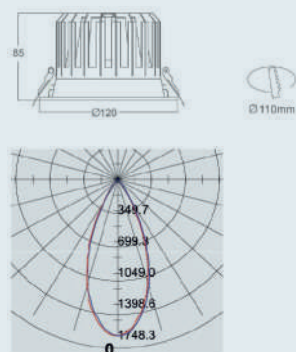


PRR CUP 2

WATTS	: 20W
MATERIAL	: ALUMINIUM
INPUT	: AC170-250V, 50-60Hz
BEAM ANGLE	: 38°
CCT(K)	: 3000K, 4000K, 5000K
CRI	: RA>92
DIMENSION	: 134 X H 85 MM
CUT-OUT	: Ø 120MM
LUMENS	: 1800LM

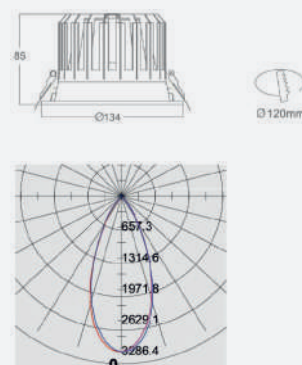

PRR TOM 1A - 1B


WATTS	: 9W
MATERIAL	: ALUMINIUM DIE-CAST
FINISH	: WHITE / BLACK
BEAM ANGLE	: 30°
CCT(K)	: 3000K, 4000K
CRI	: RA>90
DIMENSION	: 92 X 92 X H 76 MM
CUT-OUT	: Ø 86 X 86 X 100 H MM
LUMENS	: 900LM




1A - white | 1B - black

**PRR TOM 2A - 2B**

WATTS	: 18W
FINISH	: ALUMINIUM DIE-CAST
MATERIAL	: WHITE / BLACK
BEAM ANGLE	: 30°
CCT(K)	: 3000K, 4000K
CRI	: RA>90
DIMENSION	: 174 X 92 X H 76 MM
CUT-OUT	: Ø 168 X 86 X 100 H MM
LUMENS	: 1800LM




2A - white | 2B - black

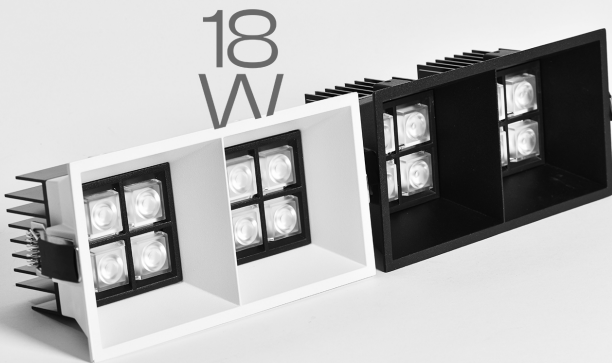




PRR EVA HIDE

WATTS	: 9W
MATERIAL	: ALUMINIUM DIE-CAST
FINISH	: SAND WHITE/BLACK
BEAM ANGLE	: 23°
CCT(K)	: 3000K, 4000K
CRI	: RA>90
DIMENSION	: 86 X H 120 MM
CUT-OUT	: Ø 114 X 150 MM
LUMENS	: 945LM





PRR HALO SENIOR

WATTS	: 24W
MATERIAL	: ALUMINIUM DIE-CAST
FINISH	: SAND WHITE
BEAM ANGLE	: 38°
CCT(K)	: 3000K, 4000K
CRI	: RA>90
DIMENSION	: 140 X H 70 MM
CUT-OUT	: Ø 127 X 100 MM
LUMENS	: 2450LM



PRR TURBO DIM

WATTS	: 9W / 12W
MATERIAL	: ALUMINIUM DIE-CAST
FINISH	: SAND WHITE
BEAM ANGLE	: 32°
CCT(K)	: 3000K, 4000K
CRI	: RA>90
DIMENSION	: 83 X H 74 MM
CUT-OUT	: Ø 68 X 90 MM
LUMENS	: 945LM / 1260LM
IP RATING	: IP44




*Used here is Prisha
Plus series PRR Ido*






PRR FONTANA SMALL

WATTS	: 12W
MATERIAL	: ALUMINIUM DIE-CAST
FINISH	: SAND WHITE/BLACK
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K, 5000K
CRI	: RA>90
DIMENSION	: 102 X H 96 MM
LUMENS	: 1190LM




PRR FONTANA BIG

WATTS	: 18W
MATERIAL	: ALUMINIUM DIE-CAST
FINISH	: SAND WHITE
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K, 5000K
CRI	: RA>90
DIMENSION	: 134 X H 121 MM
LUMENS	: 1790LM



PRR IDO 1/1A

WATTS	: 12W
MATERIAL	: ALUMINIUM DIE-CAST
FINISH	: WHITE / BLACK
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K
CRI	: RA>90
DIMENSION	: 102 X H 84 MM
LUMENS	: 1656LM
ADJUSTABLE ANGLE	: LAMP HEAD 0~45° / 350°
DRIVER	: TRIAC DIMMABLE
POWERED BY	: 





1 - white | 1A - black



PRR AURA


WATTS	: 33W SMD & 7W SPOT
MATERIAL	: ALUMINIUM & ACRYLIC
FINISH	: BLACK + BLACK SPOT
BEAM ANGLE (SPOT)	: 36°
CCT(K)	: SMD 4000K & SPOT 3000K
CRI	: RA>90
DIMENSION	: 400 X H 70 MM
LUMENS	: 3200LM

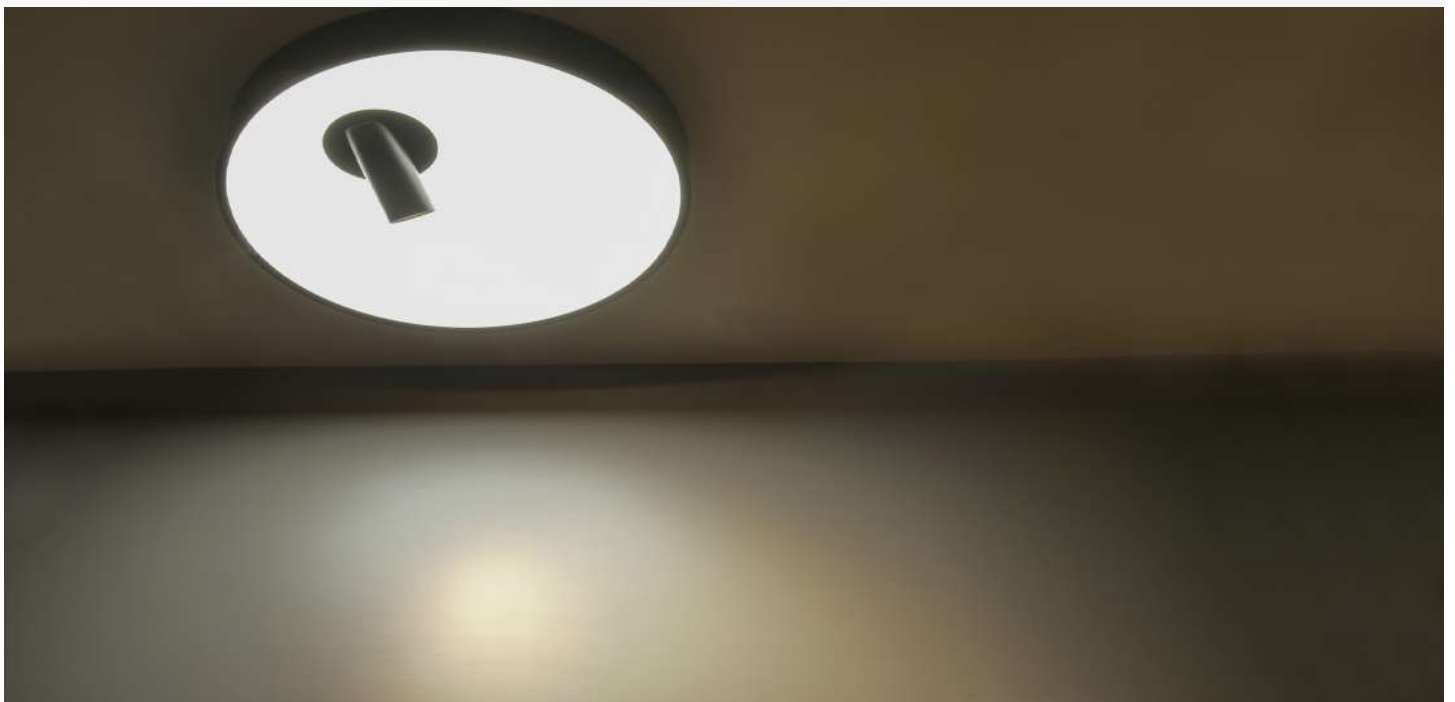



PRQ 2

WATTS	: 12W
MATERIAL	: ALUMINIUM
FINISH	: SAND WHITE
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K & 5000K
CRI	: RA>80
DIMENSION	: 76 X 76 X H 163 MM
LUMENS	: 1190LM
ADJUSTABLE ANGLE	: LAMP HEAD 80°

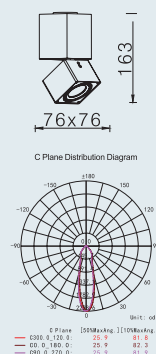

PRQ 3

WATTS	: 12W
MATERIAL	: ALUMINIUM
FINISH	: SAND WHITE
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K & 5000K
CRI	: RA>80
DIMENSION	: 85 X H 120 MM
LUMENS	: 1190LM
ADJUSTABLE ANGLE	: ROTATES 360° HEAD ADJUST 90°




PRQ INSTA

WATTS	: 12W
MATERIAL	: ALUMINIUM
FINISH	: SAND WHITE / SAND BLACK
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K, 5000K
CRI	: RA>90
DIMENSION	: Ø 58 X 160MM X BASE H 137 MM
LUMENS	: 1190LM



PRR GAMA


WATTS	: 12W
MATERIAL	: ALUMINIUM
FINISH	: SAND WHITE / BLACK
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K & 5000K
CRI	: RA>80
DIMENSION	: 76 X 76 X H 100 MM
LUMENS	: 1190LM



PRR COCK 1

MOUNTING	: SURFACE MOUNTED
FINISH	: SAND BLACK
DIMENSION	: 455 X 15 X 15 MM
IP	: IP20


POWER SUPPLY (DRIVER-24V) NOT INCLUDED



PRR COCK 2


MOUNTING	: SURFACE MOUNTED
FINISH	: SAND BLACK
DIMENSION	: 955 X 15 X 15 MM
IP	: IP20

POWER SUPPLY (DRIVER-24V) NOT INCLUDED




PRR SENSE 1

MOUNTING	: BUCKLE (USE IN SHOWCASE)
MATERIAL	: PC
SENDER	: GESTURE CONTROL SENSOR
DIMENSION	: 64 X 10 X 12 MM
IP	: IP20



PRR SENSE 2


MOUNTING	: SURFACE (USE IN WARDROBE)
MATERIAL	: PC
SENDER	: DOOR CONTROL SENSOR
DIMENSION	: 36 X 14 X 14 MM
IP	: IP20






PRR TAIL 1

WATTS	: 3W
MATERIAL	: ALUMINIUM + PC
FINISH	: SAND BLACK
BEAM ANGLE	: 24°
CCT(K)	: 3000K
CRI	: RA>80
DIMENSION	: 26 X 56 MM
LUMENS	: 240LM
MOUNTING	: BUCKLE
POWERED BY	: CREE
IP	: IP20



PRR TAIL 2


WATTS	: 6W
MATERIAL	: ALUMINIUM + PC
FINISH	: SAND BLACK
BEAM ANGLE	: 90°
CCT(K)	: 3000K
CRI	: RA>80
DIMENSION	: 12 X 10 X 249 MM
LUMENS	: 40LM
MOUNTING	: BUCKLE
POWERED BY	: OSRAM SMD
IP	: IP20






PRR TAIL 3


WATTS	: 5W
MATERIAL	: ALUMINIUM + PC
FINISH	: SAND BLACK
BEAM ANGLE	: 120°
CCT(K)	: 3000K
CRI	: RA>80
DIMENSION	: 12 X 10 X 249 MM
LUMENS	: 30LM
MOUNTING	: BUCKLE
POWERED BY	: BRIDGELUX SMD
IP	: IP20



PRR TAIL 4

WATTS	: 5W
MATERIAL	: ALUMINIUM + PC
FINISH	: SAND BLACK
BEAM ANGLE	: 120° + 10°
CCT(K)	: 3000K
CRI	: RA>80
DIMENSION	: 20.5 X 15 X 249 MM
LUMENS	: 55LM
MOUNTING	: BUCKLE
POWERED BY	:  BRIDGELUX
IP	: IP20



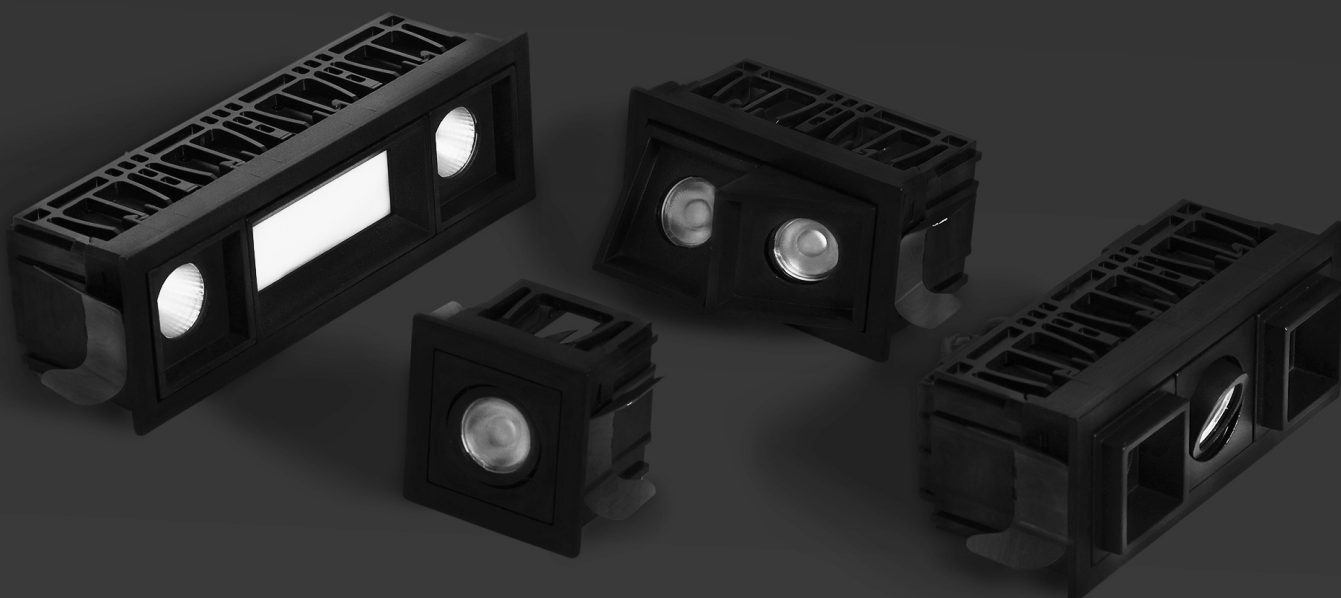

PRR PLATE 1

MATERIAL : ALUMINIUM + PC
BODY COLOUR : BLACK
DIMENSION : 63.5 X 63.5 X H 51 MM
CUT SIZE : 55 X 55 MM



PRR PLATE 2

MATERIAL : ALUMINIUM + PC
BODY COLOUR : BLACK
DIMENSION : 110.5 X 63.5 X H 57 MM
CUT SIZE : 105 X 55 MM




PRR PLATE 3

MATERIAL : ALUMINIUM + PC
BODY COLOUR : BLACK
DIMENSION : 158 X 63.5 X H 51 MM
CUT SIZE : 150 X 55 MM



PRR PLATE 4

MATERIAL : ALUMINIUM + PC
BODY COLOUR : BLACK
DIMENSION : 205 X 63.5 X H 57 MM
CUT SIZE : 200 X 55 MM

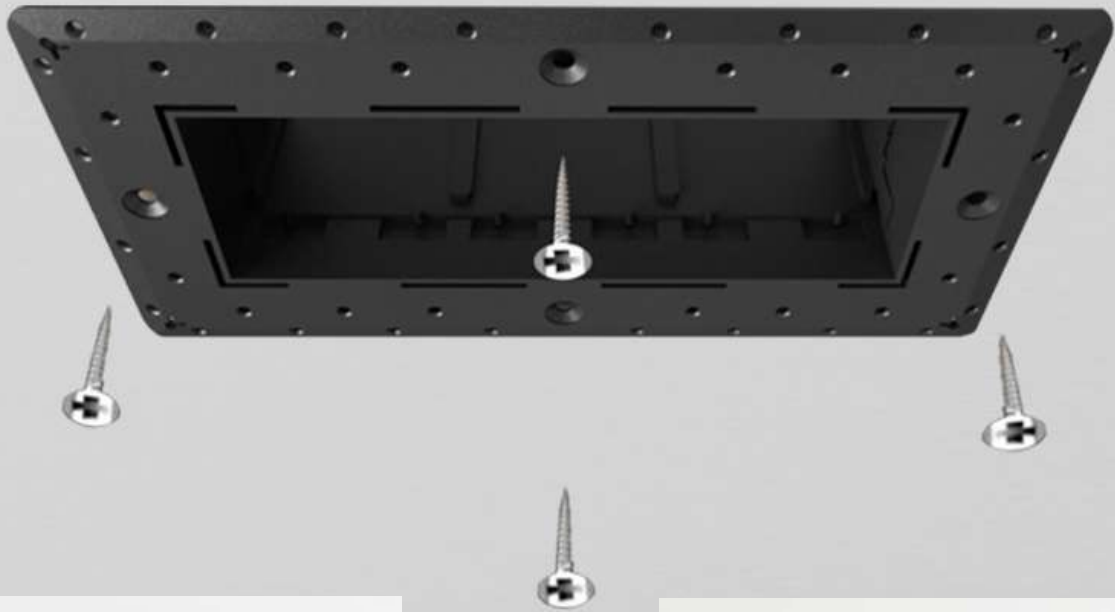

PRR PLATELESS 1

MATERIAL : PC
 DIMENSION : 95 X 95 X H 51.5 MM
 CUT SIZE : 60 X 60 MM



PRR PLATELESS 2

MATERIAL : PC
 DIMENSION : 145 X 95 X H 57 MM
 CUT SIZE : 105 X 60 MM



PRR PLATELESS 3

MATERIAL : PC
 DIMENSION : 185 X 95 X H 57 MM
 CUT SIZE : 150 X 60 MM



PRR PLATELESS 4

MATERIAL : PC
 DIMENSION : 236 X 95 X H 57 MM
 CUT SIZE : 200 X 60 MM



PRR LUDO 1

WATTS	: 5W
MATERIAL	: ALUMINIUM
FINISH	: BLACK
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K
CRI	: RA>80
DIMENSION	: 46 X 46 X 67MM
LUMENS	: 450LM
MOUNTING	: PRESS FIT - 2 STEP
IP	: IP20



PRR LUDO 2

WATTS	: 5W
MATERIAL	: ALUMINIUM
FINISH	: BLACK
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K
CRI	: RA>80
DIMENSION	: 44 X 44 X 70MM
LUMENS	: 450LM
MOUNTING	: PRESS FIT - 2 STEP
IP	: IP20



PRR LUDO 3

WATTS	: 5W (WALL WASHER)
MATERIAL	: ALUMINIUM
FINISH	: BLACK
BEAM ANGLE	: 36°
CCT(K)	: 3000K, 4000K
CRI	: RA>80
DIMENSION	: 46 X 46 X 83MM
LUMENS	: 450LM
MOUNTING	: PRESS FIT - 2 STEP
IP	: IP20



PRR LUDO 4

WATTS	: 5W (ADJUSTABLE)
MATERIAL	: ALUMINIUM
FINISH	: BLACK
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K
CRI	: RA>80
DIMENSION	: 44 X 44 X 70MM
LUMENS	: 450LM
MOUNTING	: PRESS FIT - 2 STEP
IP	: IP20



PRR LUDO 5

WATTS	: 10W
MATERIAL	: ALUMINIUM
FINISH	: BLACK
BEAM ANGLE	: 110°
CCT(K)	: 3000K, 4000K
CRI	: RA>80
DIMENSION	: 93 X 46 X 67MM
LUMENS	: 800LM
MOUNTING	: PRESS FIT - 2 STEP
IP	: IP20



PRR LUDO 6


WATTS	: 5W (HANGING)
MATERIAL	: ALUMINIUM
FINISH	: BRASS + BLACK
BEAM ANGLE	: 24°
CCT(K)	: 3000K, 4000K
CRI	: RA>80
DIMENSION	: 32 X 120MM (HANGING CABLE HEIGHT ADJUSTABLE)
LUMENS	: 450LM
MOUNTING	: PRESS FIT - 2 STEP
IP	: IP20

PRISHA PRIME

Prisha illumination focuses on new ideas when it comes to outdoor lighting products.

Our aim is to provide our clients with the premium quality fixtures, custom orientation, quality assurance and professional retail services as the core values to a complete purchase experience.

*Used here is Prisha Prime series
PRO Bosaro 1 & PRO Bosaro 2*

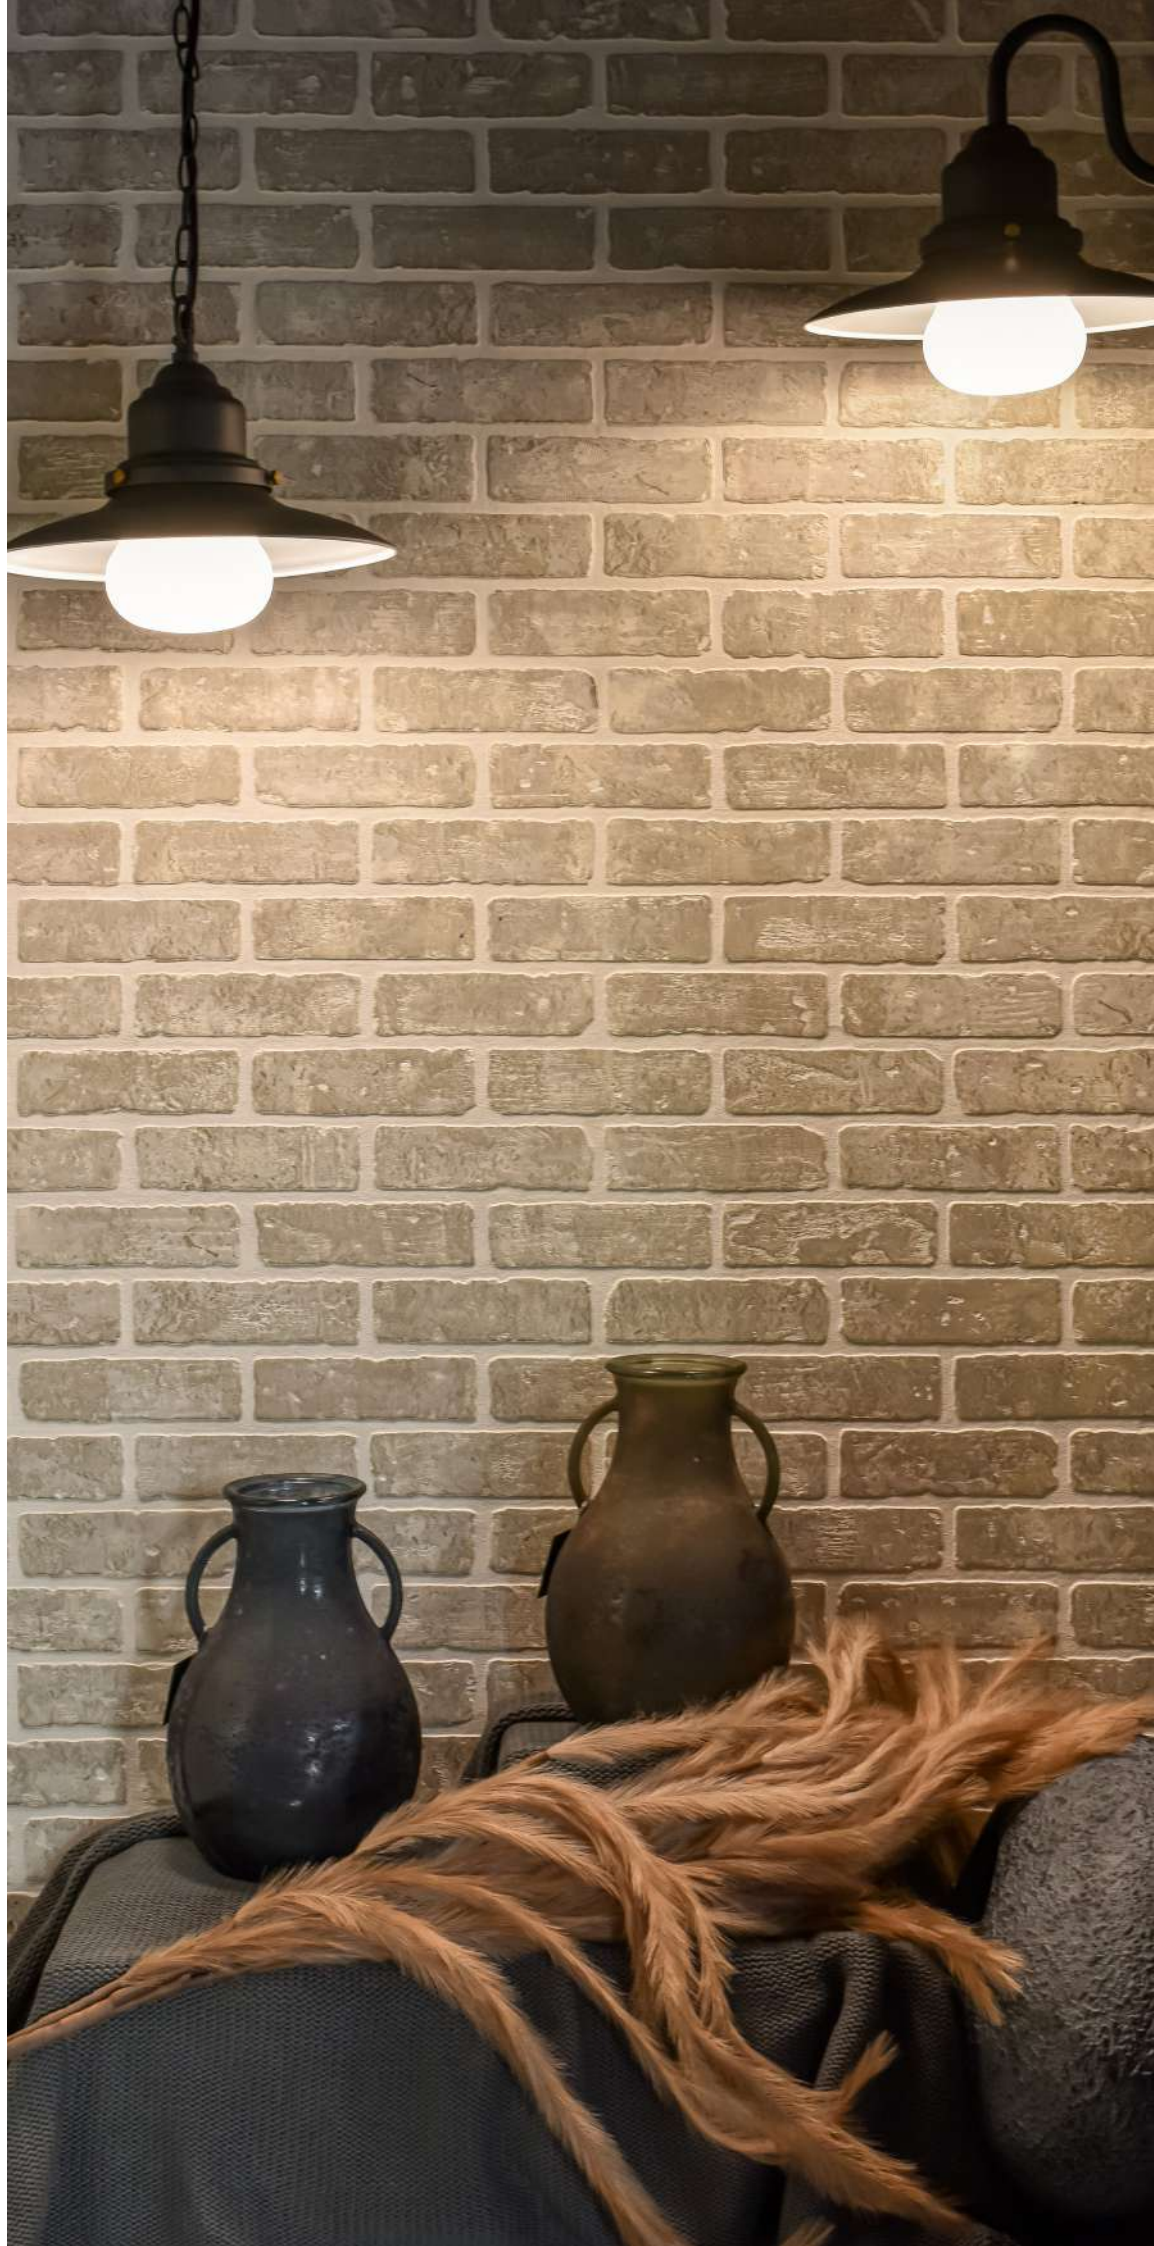



PRO ELEGANT SMALL

WATTS	: 8W
FINISH	: GRAPHITE GREY
MATERIAL	: ABS + PC BODY
CCT(K)	: 3000K, 4000K
DIMENSION	: DIA-190 MM X D-75 MM
DIFFUSER	: OPAL PC
LUMENS	: 520 LM
IP RATING	: IP54
IK RATING	: IK10
INPUT VOLTAGE	: AC DRIVERLESS
LAMP TYPE	: SMD 2835 LED
POWERED BY	EPISTAR



PRO ELEGANT MEDIUM

WATTS	: 13W
FINISH	: GRAPHITE GREY
MATERIAL	: ABS + PC BODY
CCT(K)	: 3000K, 4000K
DIMENSION	: DIA-245 MM X D-75 MM
DIFFUSER	: OPAL PC
LUMENS	: 970 LM
IP RATING	: IP54
IK RATING	: IK10
INPUT VOLTAGE	: AC DRIVERLESS
LAMP TYPE	: SMD 2835 LED
POWERED BY	EPISTAR




PRO ELEGANT BIG

WATTS	: 18W
FINISH	: GRAPHITE GREY
MATERIAL	: ABS + PC BODY
CCT(K)	: 3000K, 4000K
DIMENSION	: DIA-310 MM X D-75 MM
DIFFUSER	: OPAL PC
LUMENS	: 1100 LM
IP RATING	: IP54
IK RATING	: IK10
INPUT VOLTAGE	: AC DRIVERLESS
LAMP TYPE	: SMD 2835 LED
POWERED BY	EPISTAR



PRO ELEGANT OVAL

WATTS	: 9W (OUTDOOR BULKHEAD)
FINISH	: GRAPHITE GREY
MATERIAL	: ABS + PC BODY
CCT(K)	: 3000K, 4000K
DIMENSION	: W- 245 MM X D-69 MM X H-139 MM
DIFFUSER	: OPAL PC
LUMENS	: 550 LM
IP RATING	: IP54
IK RATING	: IK10
INPUT VOLTAGE	: AC DRIVERLESS
LAMP TYPE	: SMD 2835 LED
POWERED BY	EPISTAR

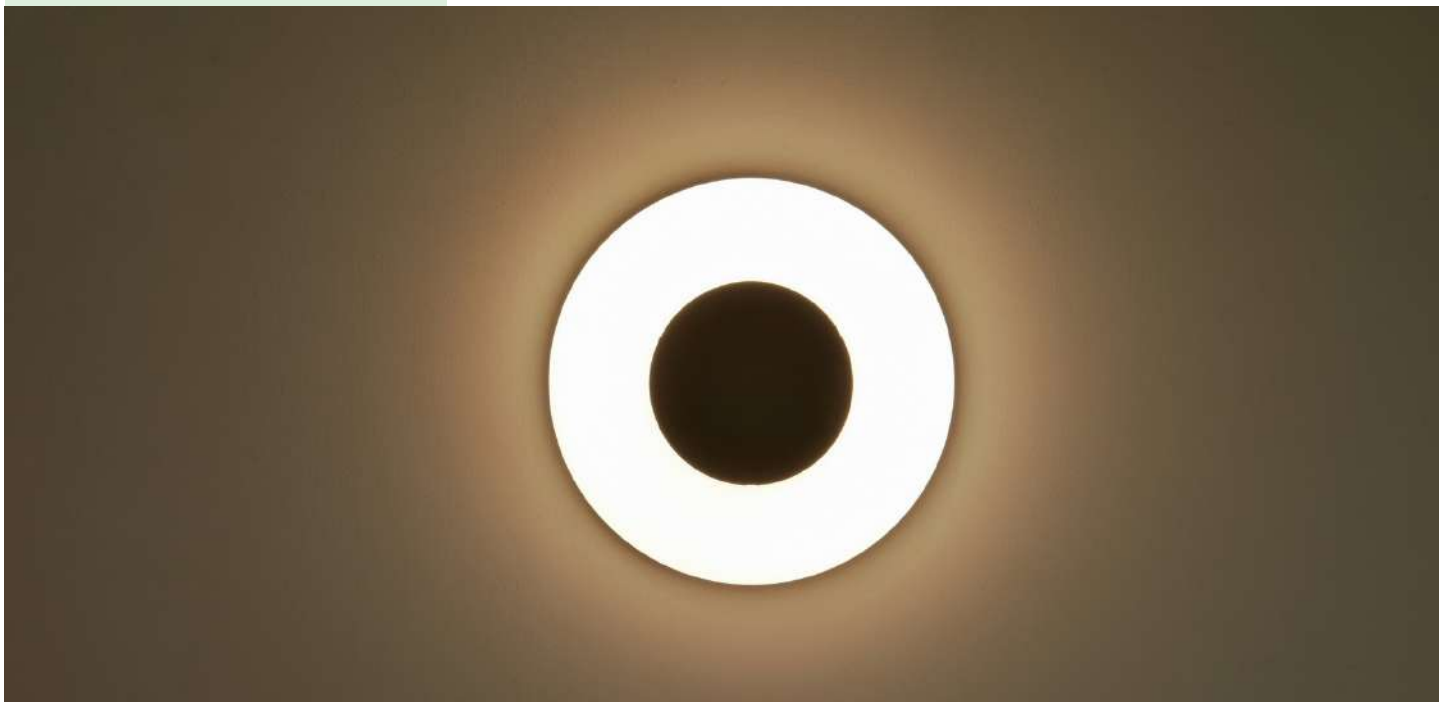

PRO PORCH SMALL

WATTS	: 8W
FINISH	: GRAPHITE GREY
MATERIAL	: ABS + PC BODY
CCT(K)	: 3000K
DIMENSION	: D 160 MM X H 45 MM
DIFFUSER	: OPAL PC
LUMENS	: 490 LM
IP RATING	: IP65
IK RATING	: IK08
LAMP TYPE	: SMD LED
POWERED BY	EPISTAR



PRO PORCH BIG

WATTS	: 14W
FINISH	: GRAPHITE GREY
MATERIAL	: ABS + PC BODY
CCT(K)	: 3000K
DIMENSION	: D 220 MM X H 50 MM
DIFFUSER	: OPAL PC
LUMENS	: 850 LM
IP RATING	: IP65
IK RATING	: IK08
LAMP TYPE	: SMD LED
POWERED BY	EPISTAR



PRO CELLAR

WATTS	: 25W
MATERIAL	: PC BODY
CCT(K)	: 3000K
DIMENSION	: DIA-280 MM X H-60 MM
DIFFUSER	: OPAL PC
LUMENS	: 2000 LM
IP RATING	: IP65
POWERED BY	: DRIVER ON BOARD



PRO DROP SQUARE

WATTS	: GU10 HOLDER
FINISH	: GRAPHITE GREY
MATERIAL	: ALUMINIUM BODY
DIMENSION	: W- 88 MM X D-88 MM X H-92 MM
DIFFUSER	: CLEAR GLASS
IP RATING	: IP65
POWERED BY	: GU10 EXTRA



PRO DROP ROUND

WATTS	: GU10 HOLDER
FINISH	: GRAPHITE GREY
MATERIAL	: ALUMINIUM BODY
DIMENSION	: DIA- 90 MM X H-100 MM
DIFFUSER	: CLEAR GLASS
IP RATING	: IP65
POWERED BY	: GU10 EXTRA



PRO ENERGY SMALL

WATTS	: 6W (OUTDOOR WALL LIGHT)
FINISH	: GRAPHITE
MATERIAL	: ALUMINIUM DIE-CAST
CCT(K)	: 3000K
DIMENSION	: W- 220 MM X D-77 MM X H-90 MM
DIFFUSER	: OPAL PC
LUMENS	: 500 LM
IP RATING	: IP65
LAMP TYPE	: COB
POWERED BY	CREE




PRO ENERGY BIG

WATTS	: 12W (OUTDOOR WALL LIGHT)
FINISH	: GRAPHITE
MATERIAL	: ALUMINIUM DIE-CAST
CCT(K)	: 3000K
DIMENSION	: W- 300 MM X D-97 MM X H-120 MM
DIFFUSER	: OPAL PC
LUMENS	: 800 LM
IP RATING	: IP65
LAMP TYPE	: COB
POWERED BY	



PRO PORCH IVY

WATTS	: 12W
FINISH	: GRAPHITE
MATERIAL	: DIE CASTING ALUMINIUM
CCT(K)	: 3000K
DIMENSION	: W-215 MM X H-125 MM
DIFFUSER	: PC DIFFUSER
LUMENS	: 1000 LM
IP RATING	: IP65
LAMP TYPE	: COB
POWERED BY	CREE

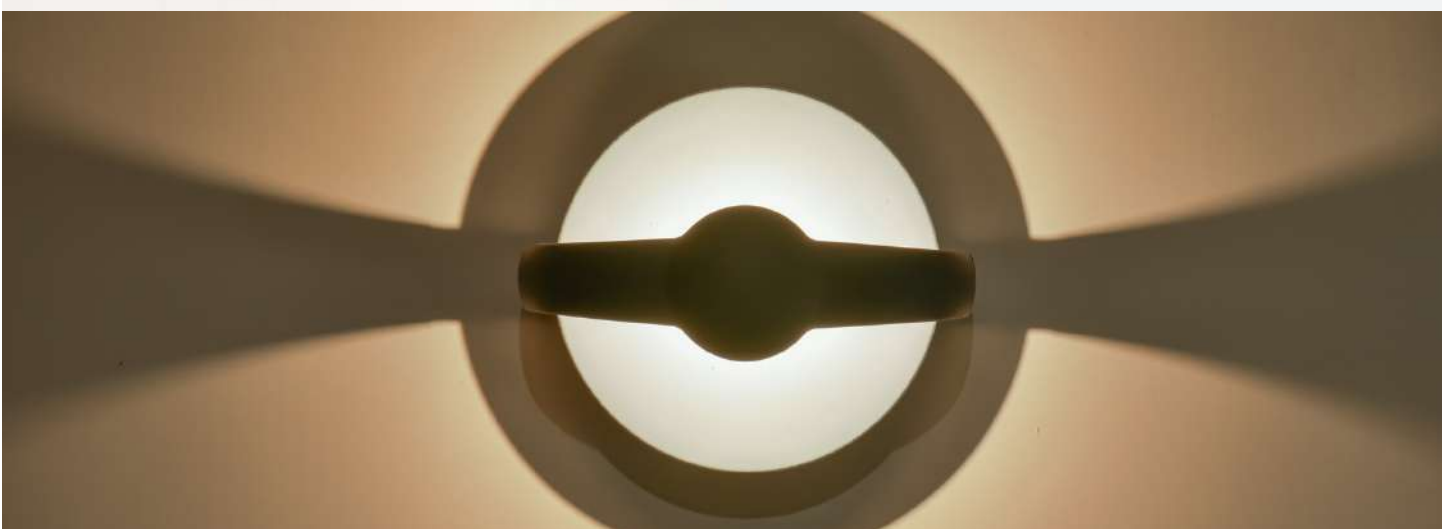



PRO AERO SQUARE

WATTS	: 12W (OUTDOOR WALL LIGHT)
FINISH	: GRAPHITE
MATERIAL	: ALUMINIUM DIE-CAST
CCT(K)	: 3000K
DIMENSION	: W- 262 MM X D-53 MM X H-110 MM
DIFFUSER	: OPAL PC
LUMENS	: 1000 LM
IP RATING	: IP65
LAMP TYPE	: SMD LED
POWERED BY	EPISTAR




PRO AERO OVAL

WATTS	: 12W (OUTDOOR WALL LIGHT)
FINISH	: GRAPHITE GREY
MATERIAL	: ALUMINIUM DIE-CAST
CCT(K)	: 3000K
DIMENSION	: W- 292 MM X D- 53 MM X H-110 MM
DIFFUSER	: OPAL PC
LUMENS	: 1000 LM
IP RATING	: IP65
LAMP TYPE	: SMD LED
POWERED BY	EPISTAR



PRO AERO SMALL

WATTS	: 8W (OUTDOOR WALL LIGHT)
FINISH	: GRAPHITE
MATERIAL	: ALUMINIUM DIE-CAST
CCT(K)	: 3000K
DIMENSION	: W- 60 MM X D-60 MM X H-144 MM
DIFFUSER	: OPAL PC
LUMENS	: 720 LM
IP RATING	: IP65
INPUT VOLTAGE LAMP TYPE	: AC DRIVERLESS
POWERED BY	EPISTAR

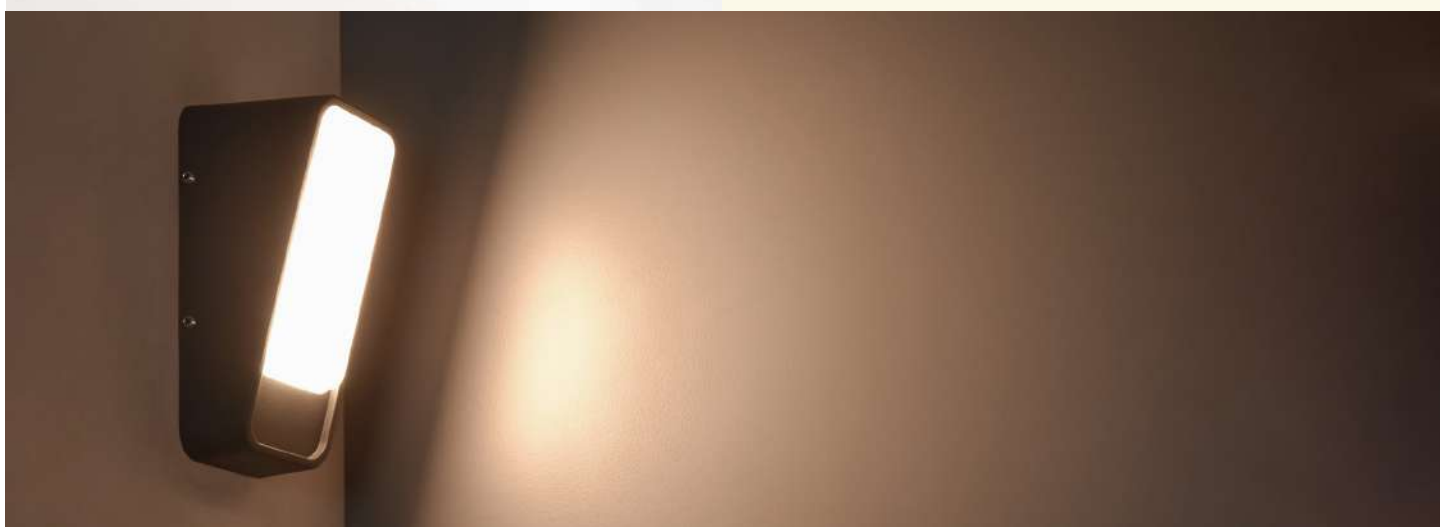



PRO AERO BRICK

WATTS	: 13W
FINISH	: GRAPHITE
MATERIAL	: ALUMINIUM DIE-CAST
CCT(K)	: 3000K
DIMENSION	: W- 200 MM X D- 30 MM X H-135 MM
DIFFUSER	: OPAL PC
LUMENS	: 650 LM
IP RATING	: IP65
LAMP TYPE	: SMD LED
POWERED BY	EPISTAR



PRO LUCY

WATTS	: 10W
FINISH	: GRAPHITE GREY
MATERIAL	: ALUMINIUM DIE-CAST
CCT(K)	: 3000K
DIMENSION	: W- 200 MM X D- 85 MM X H-135 MM
DIFFUSER	: OPAL PC
LUMENS	: 700 LM
IP RATING	: IP54
LAMP TYPE	: SMD LED
POWERED BY	EPISTAR



PRO ROCK

WATTS	: 2 X 5W= 10W
FINISH	: GRAPHITE GREY
MATERIAL	: ALUMINIUM DIE-CAST
CCT(K)	: 3000K
DIMENSION	: W- 115 MM X H-120 MM
DIFFUSER	: PC DIFFUSER
IP RATING	: IP65
LAMP TYPE	: COB
POWERED BY	CREE





PRO ROCKY

WATTS	: 2 X 6W= 12W
FINISH	: GRAPHITE GREY
MATERIAL	: ALUMINIUM DIE-CAST
CCT(K)	: 3000K
DIMENSION	: W- 375 MM X D- 160MM X H- 260 MM
DIFFUSER	: OPAL PC
LUMENS	: 2 X 400LM
IP RATING	: IP54
LAMP TYPE	: SMD LED
POWERED BY	CREE



PRO MOTION

WATTS	: 12W
SENSOR	: MOVEMENT SENSOR
FINISH	: GRAPHITE
MATERIAL	: ALUMINIUM DIE-CAST
CCT(K)	: 3000K
DIMENSION	: W- 165 MM X D-200 MM X H-153 MM
DIFFUSER	: OPAL PC
LUMENS	: 900 LM
IP RATING	: IP65
LAMP TYPE	: SMD LED
POWERED BY	EPISTAR



*Used here is
Prisha Prime
series PRO Rock
& PRO Path*





PRO BOSARO 1

WATTS	: 7W
FINISH	: GRAPHITE GREY
MATERIAL	: STEEL
CCT(K)	: 3000K
DIMENSION	: W- 110 MM X D-320 MM X H-860 MM
DIFFUSER	: GLASS DIFFUSER
LUMENS	: 670 LM
IP RATING	: IP44
LAMP TYPE	: SMD LED
POWERED BY	EPISTAR



PRO BOSARO 2

WATTS	: 7W
FINISH	: GRAPHITE GREY
MATERIAL	: STEEL
CCT(K)	: 3000K
DIMENSION	: W- 130 MM X D-320 MM X H-310 MM
DIFFUSER	: GLASS DIFFUSER
LUMENS	: 670 LM
IP RATING	: IP44
LAMP TYPE	: SMD LED
POWERED BY	EPISTAR



PRO AIR

WATTS	: 8 SIDED OUTDOOR WALL LANTERN
FINISH	: GRAPHITE GREY
MATERIAL	: DIE CASTING ALUMINIUM
DIMENSION	: W- 155 MM X D-206 MM X H-227 MM
DIFFUSER	: PC DIFFUSER
IP RATING	: IP44
LAMP TYPE	: E27 MAX 15W CFL (LAMP EXCLUDED)

18
W

PRO LEVIS

WATTS	: 2 X 9W = 18W
FINISH	: GRAPHITE GREY
MATERIAL	: ALUMINIUM BODY
CCT(K)	: 3000K
DIMENSION	: Ø 85 MM x D-83 MM x H-210 MM
DIFFUSER	: GLASS DIFFUSER
IP RATING	: IP65
POWERED BY	CREE

30
W

PRO WOLLARD

WATTS	: 30W
FINISH	: GRAPHITE
MATERIAL	: ALUMINIUM BODY
CCT(K)	: 3000K
DIMENSION	: W- 264 MM X D-117 MM X H-308 MM
DIFFUSER	: OPAL PC
IP RATING	: IP65
POWERED BY	: SMD LED





PRO ANGELA ROUND

WATTS	: 2W (SURFACE MOUNTED ABS + PC BODY STEP LIGHT)
FINISH	: GRAPHITE
MATERIAL	: PLASTIC
CCT(K)	: 3000K, 4000K
DIMENSION	: DIA- 128 MM x D-30 MM
DIFFUSER	: CLEAR PC
LUMENS	: 180 LM
IP RATING	: IP54
LAMP TYPE	: SMD LED
POWERED BY	EPISTAR



PRO ANGELA RECTANGLE

WATTS	: 3W (SURFACE MOUNTED ABS + PC BODY STEP LIGHT)
FINISH	: GRAPHITE
MATERIAL	: PLASTIC
CCT(K)	: 3000K, 4000K
DIMENSION	: W- 210 MM x D-30 MM x H-85 MM
DIFFUSER	: CLEAR PC
LUMENS	: 270 LM
IP RATING	: IP54
LAMP TYPE	: SMD LED
POWERED BY	EPISTAR



PRO ANGELA DIRECT

WATTS	: 5W (SURFACE MOUNTED ABS + PC BODY STEP LIGHT)
FINISH	: GRAPHITE
MATERIAL	: PLASTIC
CCT(K)	: 3000K, 4000K
DIMENSION	: W- 210 MM x D-30 MM x H-85 MM
DIFFUSER	: CLEAR PC
LUMENS	: 400 LM
IP RATING	: IP54
LAMP TYPE	: SMD LED
POWERED BY	EPISTAR



PRO ENERGY BELLE

WATTS	: 5W
FINISH	: GRAPHITE GREY
MATERIAL	: DIE CASTING ALUMINIUM
CCT(K)	: 3000K
DIMENSION	: W- 240 MM x D-37 MM x H-75 MM
DIFFUSER	: OPAL PC
LUMENS	: 300 LM
IP RATING	: IP65
LAMP TYPE	: SMD LED
POWERED BY	EPISTAR



PRO BRICK

WATTS	: 9W
FINISH	: GRAPHITE GREY
MATERIAL	: DIE CASTING ALUMINIUM
CCT(K)	: 3000K
DIMENSION	: W- 262 MM x D-53 MM x H-55 MM
DIFFUSER	: GLASS DIFFUSER
LUMENS	: 650 LM
IP RATING	: IP65
LAMP TYPE	: LED
POWERED BY	EPISTAR



PRO PARKER

WATTS	: 12W
FINISH	: GRAPHITE GREY
MATERIAL	: DIE CASTING ALUMINIUM
CCT(K)	: 3000K
DIMENSION	: W- 250 MM x D-90 MM x H-98 MM
DIFFUSER	: CLEAR PC
IP RATING	: IP65
LAMP TYPE	: SMD LED
POWERED BY	EPISTAR



PRO RADIUS

WATTS	: OUTDOOR SPOTLIGHT WITH SPIKE
FINISH	: GRAPHITE
MATERIAL	: ABS + PC BODY
DIMENSION	: W- 80 MM X D-130 MM X H-113 MM
IP RATING	: IP54
LAMP TYPE	: GU10 LED MAX 6W (LAMP EXCLUDED)



PRO RISE

WATTS	: OUTDOOR SPOTLIGHT WITH SPIKE
FINISH	: GRAPHITE
MATERIAL	: ALUMINIUM DIE CAST
DIMENSION	: W- 95 MM X D-150 MM X H-137 MM
IP RATING	: IP65
LAMP TYPE	: GU10 LED MAX 50W (LAMP EXCLUDED)



PRO ARISE

WATTS	: 9W (OUTDOOR WALL LIGHT)
FINISH	: GRAPHITE GREY
MATERIAL	: ALUMINIUM DIE-CAST
BEAM ANGLE	: ADJUSTABLE BEAM ANGLE (30-60)
CCT(K)	: 3000K
DIMENSION	: W- 85 MM x D- 154 MM x H-150 MM
DIFFUSER	: CLEAR GLASS
LUMENS	: 800 LM
IP RATING	: IP65
LAMP TYPE	: COB
POWERED BY	CREE



PRO ALROUND

WATTS	: 12W (OUTDOOR WALL LIGHT)
FINISH	: GRAPHITE GREY
MATERIAL	: ALUMINIUM DIE-CAST
CCT(K)	: 3000K
DIMENSION	: W- 160 MM x D-235 MM x H-95 MM
DIFFUSER	: CLEAR GLASS
LUMENS	: 800 LM
IP RATING	: IP65
LAMP TYPE	: COB
POWERED BY	CREE





PRO TWIN

WATTS	: 2 X 1W= 2W (SURFACE MOUNTED GROUND LIGHT)
FINISH	: GRAPHITE
MATERIAL	: ALUMINIUM DIE-CAST
CCT(K)	: 3000K
DIMENSION	: DIA- 210 MM x D-50 MM
DIFFUSER	: CLEAR PC
LUMENS	: 200 LM
IP RATING	: IP67
IK RATING	: IK10
MAX WEIGHT	: 2000KG
LAMP TYPE	: LED
POWERED BY	CREE



PRO QUARDO

WATTS	: 4 X 1W= 4W (SURFACE MOUNTED GROUND LIGHT)
FINISH	: GRAPHITE
MATERIAL	: ALUMINIUM DIE-CAST
CCT(K)	: 3000K
DIMENSION	: DIA- 210 MM X D-50 MM
DIFFUSER	: CLEAR PC
LUMENS	: 400 LM
IP RATING	: IP67
IK RATING	: IK10
MAX WEIGHT	: 2000KG
LAMP TYPE	: LED
POWERED BY	CREE





PRO POLAR 1

WATTS	: 9W
FINISH	: GRAPHITE GREY
MATERIAL	: ALUMINIUM DIE-CAST
CCT(K)	: 3000K
DIMENSION	: DIA- 107 MM X H-120 MM
DIFFUSER	: OPAL PC
LUMENS	: 720 LM
IP RATING	: IP65
LAMP TYPE	: SMD LED
POWERED BY	EPISTAR



PRO POLAR 2

WATTS	: 9W
FINISH	: GRAPHITE GREY
MATERIAL	: ALUMINIUM DIE-CAST
CCT(K)	: 3000K
DIMENSION	: DIA- 107 MM X H-140 MM
DIFFUSER	: OPAL PC
LUMENS	: 720 LM
IP RATING	: IP65
LAMP TYPE	: SMD LED
POWERED BY	EPISTAR



PRO POLAR 3

WATTS	: 9W
FINISH	: GRAPHITE GREY
MATERIAL	: ALUMINIUM DIE-CAST
CCT(K)	: 3000K
DIMENSION	: DIA- 107 MM X H-400 MM
DIFFUSER	: OPAL PC
LUMENS	: 720 LM
IP RATING	: IP65
LAMP TYPE	: SMD LED
POWERED BY	EPISTAR



PRO POLAR 4

WATTS	: 9W
FINISH	: GRAPHITE GREY
MATERIAL	: ALUMINIUM DIE-CAST
CCT(K)	: 3000K
DIMENSION	: DIA- 107 MM X H-600 MM
DIFFUSER	: OPAL PC
LUMENS	: 720 LM
IP RATING	: IP65
LAMP TYPE	: SMD LED
POWERED BY	EPISTAR



PRO TRONO 1

WATTS	: 12W
FINISH	: GRAPHITE GREY
MATERIAL	: ALUMINIUM DIE-CAST
CCT(K)	: 3000K
DIMENSION	: W-100 MM X D-100 MM X H-150 MM
DIFFUSER	: OPAL PC
LUMENS	: 600 LM
IP RATING	: IP65
LAMP TYPE	: SMD LED
POWERED BY	EPISTAR



PRO TRONO 2

WATTS	: 12W
FINISH	: GRAPHITE GREY
MATERIAL	: ALUMINIUM DIE-CAST
CCT(K)	: 3000K
DIMENSION	: W-100 MM X D-100 MM X H-500 MM
DIFFUSER	: OPAL PC
LUMENS	: 600 LM
IP RATING	: IP65
LAMP TYPE	: SMD LED
POWERED BY	EPISTAR



PRO TRONO 3

WATTS	: 12W
FINISH	: GRAPHITE GREY
MATERIAL	: ALUMINIUM DIE-CAST
CCT(K)	: 3000K
DIMENSION	: W-100 MM X D-100 MM X H-800 MM
DIFFUSER	: OPAL PC
LUMENS	: 600 LM
IP RATING	: IP65
LAMP TYPE	: SMD LED
POWERED BY	EPISTAR



PRO PATH

WATTS	: 6W
FINISH	: GRAPHITE GREY
MATERIAL	: ALUMINIUM DIE-CAST
CCT(K)	: 3000K
DIMENSION	: W-100 MM X D-50 MM X H-250 MM
DIFFUSER	: OPAL PC
IP RATING	: IP65
POWERED BY	: SMD 2835



PRO ENTICER 1

WATT	: 20W
MATERIAL	: PC DIFFUSER + DIE CAST ALUMINUM
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENTION	: H 2 FT. × D 75 MM
IP RATING	: IP54
DRIVER	: PRISHA ISOLATED OR EQUIVALENT
POWERED BY	bridgelux.



PRO ENTICER 2

WATT	: 40W
MATERIAL	: PC DIFFUSER + DIE CAST ALUMINUM
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENTION	: H 4 FT. × D 75 MM
IP RATING	: IP54
DRIVER	: PRISHA ISOLATED OR EQUIVALENT
POWERED BY	bridgelux.




PRO ENTICER 3

WATT	: 80W
MATERIAL	: PC DIFFUSER + DIE CAST ALUMINUM
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENTION	: H 8 FT. × D 75 MM
IP RATING	: IP54
DRIVER	: PRISHA ISOLATED OR EQUIVALENT
POWERED BY	bridgelux.



PRO POST TOP 1

WATTS	: 50W
FINISH	: GRAPHITE GREY
MATERIAL	: PC DIFFUSER + DIE CAST ALUMINUM
DIMENSION	: D 395 MM X H 275 MM
IP RATING	: IP54
DRIVER	: PRISHA ISOLATED OR EQUIVALENT
POWERED BY	bridgelux.



PRR POLE 1

FINISH	: GRAPHITE GREY
MATERIAL	: ALUMINIUM DIE CAST
DIMENSION	: H 10 FT. X D 75 MM



PROP SERIES

Prop Outdoor series is an lighting innovation made in India, to cater to a range of outdoor luminaries that provide effective lighting variations in application for ingenious user experience. All products and prices are economically competitive, to bring a new and contemporary vision and delivery standard in the Indian commercial and home décor industry.

*Used here is
Prisha Prop series
PROP W36*





PROP F 11

WATTS	: 4W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 90 X H 60 MM
LUMENS	: 320LM
IP RATING	: IP54
LAMP TYPE	: LED
POWERED BY	: 



PROP F 12

WATTS	: 8W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 150 X H 70MM
LUMENS	: 640LM
IP RATING	: IP54
LAMP TYPE	: LED
POWERED BY	: 



PROP W 40

WATTS	: 4W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 105 X H 105 MM
IP	: IP54
DIFFUSER	: PC DIFFUSER




PROP W 41

WATTS	: 4W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: DIA 115 MM
IP	: IP54
DIFFUSER	: PC DIFFUSER



PROP F 45

WATTS	: 3W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: Ø95 X H 60 MM
IP	: IP54
LAMP TYPE	: LED
POWERED BY	: OSRAM

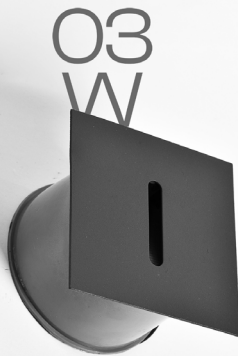

PROP F 46

WATTS	: 3W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 95 X 95 X H 60 MM
IP	: IP54
LAMP TYPE	: LED
POWERED BY	: OSRAM



PROP F 47

WATTS	: 5W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 250 X 45 X H 45 MM
IP	: IP54
LAMP TYPE	: LED
POWERED BY	: CREE



PROP C 28

WATTS	: 5W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 64 X H 82 MM
IP	: IP54
LAMP TYPE	: LED
LUMENS	: 480LM
POWERED BY	CREE



PROP C 25

WATTS	: 12W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 90 X H 150 MM
IP	: IP54
LAMP TYPE	: COB
LUMENS	: 960LM
POWERED BY	CREE



PROP EMY 1

WATTS	: 8W
MATERIAL	: ALUMINIUM
FINISH	: BLACK
BEAM ANGLE	: 110°
CCT(K)	: 3000K
CRI	: ≥80
DIMENSION	: 90 X H 46 MM
IP	: IP54
LUMENS	: 720LM



PROP EMY 2

WATTS	: 14W
MATERIAL	: ALUMINIUM
FINISH	: BLACK
BEAM ANGLE	: 110°
CCT(K)	: 3000K
CRI	: ≥80
DIMENSION	: 140 X H 46 MM
IP	: IP54
LUMENS	: 1260LM



PROP W 18

MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
DIMENSION	: 180 X 230 MM
DIFFUSER	: PC DIFFUSER
IP	: IP54
LAMP TYPE	: E-27 (LAMP NOT INCLUDED)



PROP W 20

WATTS	: 12W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 190 X 160 MM
IP	: IP54
LUMENS	: 960LM
LAMP TYPE	: LED
POWERED BY	:  DISON



PROP W 37

WATTS	: 12W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
DIFFUSER	: PC DIFFUSER
CCT(K)	: 3000K
DIMENSION	: 105 X H 290 MM
IP	: IP54



PROP W 21

WATTS	: 3W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 80 X 75 MM
IP RATING	: IP54
LUMENS	: 240LM
LAMP TYPE	: LED
POWERED BY	CREE



PROP W 22

WATTS	: 2 X 3W = 6W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 80 X H 140 MM
IP RATING	: IP54
LUMENS	: 480LM
LAMP TYPE	: LED
POWERED BY	CREE



PROP W 33

WATTS	: 4 X 3W = 12W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 77 X 77 X H 57 MM
IP RATING	: IP54
LUMENS	: 840LM
POWERED BY	CREE



PROP W 34

WATTS	: 2 X 3W = 6W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 77 X 77 X H 57 MM
IP RATING	: IP54
LUMENS	: 420LM
POWERED BY	CREE



PROP W 26

WATTS	: 5W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 77 X 77 X H 57 MM
IP RATING	: IP54
LUMENS	: 840LM
POWERED BY	CREE



PROP W 27

WATTS	: 2 X 5W = 10W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 64 X H 158 MM
IP RATING	: IP54
LUMENS	: 800LM
LAMP TYPE	: COB
POWERED BY	CREE



PROP W 23

WATTS	: 12W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 90 X H 155 MM
IP RATING	: IP54
LUMENS	: 960LM
LAMP TYPE	: COB
POWERED BY	CREE



PROP W 24

WATTS	: 2 X 12W = 24W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 90 X H 240 MM
IP RATING	: IP54
LUMENS	: 1920LM
LAMP TYPE	: COB
POWERED BY	CREE



PROP W 36

WATTS	: 12W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 45 X H 180 MM
IP RATING	: IP54
POWERED BY	: 



PROP W 48

WATTS	: 12W
MATERIAL	: ALUMINIUM + PC DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 160 X 100 X H 87 MM
IP RATING	: IP54
LAMP TYPE	: LED



PROP W 52

WATTS	: 6W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 96 X 153 MM
IP RATING	: IP54
LAMP TYPE	: LED
POWERED BY	: 



PROP W 53

WATTS	: 9W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 165 X 118 MM
IP RATING	: IP54
LAMP TYPE	: LED
POWERED BY	: OSRAM



PROP S 29

WATTS	: 7W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 91 X 64 X H 186 MM
IP RATING	: IP54
LAMP TYPE	: COB
LUMENS	: 560 LM
POWERED BY	CREE



PROP S 30

WATTS	: 12W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 95 X 84 X H 186 MM
IP RATING	: IP54
LAMP TYPE	: COB
LUMENS	: 1080 LM
POWERED BY	CREE



PROP U 31

WATTS	: 7W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 85 X H 90 MM
IP RATING	: IP54
LAMP TYPE	: COB
LUMENS	: 560 LM
POWERED BY	CREE



PROP U 32

WATTS	: 12W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 110 X H 100 MM
IP RATING	: IP54
LAMP TYPE	: COB
LUMENS	: 960 LM
POWERED BY	CREE

*Used here is Prisha
Prop series PROP B19*





PROP G 17

MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
DIMENSION	: 180 X H 230 MM
DIFFUSER	: PC DIFFUSER
IP RATING	: IP54
LAMP TYPE	: E-27 (LAMP NOT INCLUDED)



PROP B 16

MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
DIMENSION	: 180 X H 500 MM
DIFFUSER	: PC DIFFUSER
IP RATING	: IP54
LAMP TYPE	: E-27 (LAMP NOT INCLUDED)



PROP B 15

MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
DIMENSION	: 180 X H 760 MM
DIFFUSER	: PC DIFFUSER
IP RATING	: IP54
LAMP TYPE	: E-27 (LAMP NOT INCLUDED)



PROP B 19

WATTS	: 12W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 180 X H 500 MM
IP RATING	: IP54
LUMENS	: 960LM
LAMP TYPE	: LED
POWERED BY	: 



PROP G 38

WATTS	: 12W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 105 X H 305 MM
DIFFUSER	: PC DIFFUSER
IP RATING	: IP54



PROP B 39

WATTS	: 12W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 105 X H 500 MM
DIFFUSER	: PC DIFFUSER
IP RATING	: IP54



PROP G 42

WATTS	: E27
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
DIMENSION	: 210 X H 205 MM
DIFFUSER	: PC DIFFUSER
IP RATING	: IP54



PROP G 43

WATTS	: E27
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
DIMENSION	: 215 X H 200 MM
DIFFUSER	: PC DIFFUSER
IP RATING	: IP54



PROP G 44

WATTS	: E27
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
DIMENSION	: 254 X 254 MM
DIFFUSER	: PC DIFFUSER
IP RATING	: IP54



PROP G 54

WATTS	: E27
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
DIMENSION	: 152 X 152 MM
DIFFUSER	: PC DIFFUSER
IP RATING	: IP54



PROP B 49

WATTS	: 12W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 140 D X H 254 MM
IP RATING	: IP54
POWERED BY	CREE



PROP B 50

WATTS	: 12W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 140 D X H 508 MM
IP RATING	: IP54
POWERED BY	CREE



PROP B 51

WATTS	: 12W
MATERIAL	: ALUMINIUM DIE CASTED
FINISH	: GRAPHITE GREY
CCT(K)	: 3000K
DIMENSION	: 140 D X H 762 MM
IP RATING	: IP54
POWERED BY	CREE

MECHANICAL TRACKS



LED STRIP LIGHTS



EMPTY PROFILES



RECOMMENDED LIGHT LEVELS INDOORS

Office Space		Public Areas	
Normal work station space, open or closed offices	500	Entrance Lobbies, Atria	200
ADP Areas	500	Elevator Lobbies, Public Corridors	200
Conference Rooms	300	Ped. Tunnels and Bridges	200
Training Rooms	500	Stairwells	200
Internal Corridors	200	Support Spaces	
Auditorium	150-200	Toilets	200
Specialty Areas		Staff Locker Rooms	200
Dining Areas	150-200	Storage Rooms, Janitors' Closets	200
Kitchens	500	Electrical Rooms, Generator Rooms	200
Outleased Space	500	Mechanical Rooms	200
Physical Fitness Space	500	Communications Rooms	200
Child Care Centers	500	Maintenance Shops	200
Structured Parking, General Space	50	Loading Docks	200
Structured Parking, Intersections	100	Trash Rooms	200
Structured Parking, Entrances	500		

INGRESS PROTECTION CHART

Degrees of Protection - First Digit

The first digit of the IP code indicates the degree that persons are protected against contact with moving parts (other than smooth rotating shafts, etc.) and the degree that equipment is protected against solid foreign bodies intruding into an enclosure.

FIRST NUMBER	TEST
0	No special protection
1	Protection from a large part of the body such as a hand (but no protection from deliberate access); from solid objects greater than 50mm in diameter.
2	Protection against fingers or other object not greater than 80mm in length and 12mm in diameter.
3	Protection from entry by tools, wires, etc., with a diameter of thickness greater than 1.0mm.
4	Protection from entry by solid objects with a diameter or thickness greater than 1.0mm
5	Protection from the amount of dust that would interfere with the operation of the equipment.
6	Dust tight.

Degrees of Protection - Second Digit

The second digit indicates the degree of protection of the equipment inside the enclosure against the harmful entry of various forms of moisture (e.g. dripping, spraying, submersion, etc.)

FIRST NUMBER	TEST
0	No special protection
1	Protected against sprays of water from any direction, up to 60 degrees from the vertical.
2	Protected against falling drops of water, if the case is disposed up to 15 degrees from the vertical.
3	Protected against sprays of water from any direction, up to 60 degrees from the vertical.
4	Protected against splash water from any direction. Limited ingress permitted.
5	Protected against low pressure water jets from any direction. Limited ingress permitted.
6	Protected against high pressure water jets from any direction. Limited ingress permitted.
7	Protected against short periods of immersion in water - between 15cm and 1m.
8	Protected against long, durable periods of immersion in water, under pressure.

Submersion depth and time must be specified by the end-user. The requirement must be more onerous than IP67

GENERAL TERMS & CONDITIONS:

- Goods are dispatched by us on purchaser's risk. All claims for loss, damage or shortage will be filled by the purchaser directly with the carriers.
- Design changes are a routine practice at Prisha Illumination for better improvement. Data provided may change without any prior intimation. Customers are advised to reconfirm the data or product dimensions before purchase.
- Orders must be placed against confirmed purchase order only.
- Warranty becomes void if the product is improperly applied and if the damage is caused by improper use or installation.
- Fundamental failures that will not be considered for warranty: - Physical damage of any components or product due to improper handling.
- Colour of the product in photo may vary from the actual product.
- Disputes, if any are subject to Ahmedabad jurisdiction.
- All Dealers/Customers are advised to take material/orders after approving physical sample. Dimensions and cut out as mentioned in the catalogue may vary from actual product according to lot. Further no claim will be entertained by Company.

Light should not interpret architecture; it must transform it!
Light should not enhance space and form; it should empower it!
Light is the life-force of man-made structures.
It is through light that events become meaningful.
Light marks our presence as alive and self-aware.
Burned in memory, light is profoundly experienced.”

-Edward P. Bartholomew

Marketed by:

LIGHT | *INSIDE* PVT LTD

Mob. no.: +91 98254 31492

Email: dhaval@lightinside.in

Website: www.prishaillumination.com

Group
Light | *i*NSIDE